COUNTS OF RED TIDE ORGANISMS

Gymnodinium breve

AND ASSOCIATED OCEANOGRAPHIC

DATA FROM FLORIDA WEST COAST,

1954-57

Marine Biological Laboratory
LIBRARY
JUL 2 7 1959
WOODS HOLE, MASS.



Explanatory Note

The series embodies results of investigations, usually of restricted scope, intended to aid or direct management or utilization practices and as guides for administrative or legislative action. It is issued in limited quantities for the official use of Federal, State, or cooperating Agencies and in processed form for economy and to avoid delay in publication.

United States Department of the Interior, Fred A. Seaton, Secretary Fish and Wildlife Service, Arnie J. Suomela, Commissioner

COUNTS OF RED TIDE ORGANISMS, Gymnodinium breve, AND ASSOCIATED OCEANOGRAPHIC DATA FROM FLORIDA WEST COAST, 1954-57

by

John H. Finucane and Alexander Dragovich
Fishery Research Biologists
Bureau of Commercial Fisheries



United States Fish and Wildlife Service Special Scientific Report--Fisheries No. 289

Washington, D. C. March 1959

The Library of Congress catalogue card for this publication is as follows:

Finucane, John H

Counts of red tide organisms, Gymnodinium breve, and associated oceanographic data from Florida west coast, 1954-57, by John H. Finucane and Alexander Dragovich. Washington, U. S. Dept. of the Interior, Fish and Wildlife Service, 1959.

220 p. maps, tables. 27 cm. (U. S. Fish and Wildlife Service. Special scientific report—fisheries, no. 289)

Bibliography: p. 3-4.

1. Gymnodinium brevis. I. Dragovich, Alexander, joint author. II. Title. (Series)

[SH11.A335 no. 289]

Int 59-41

U. S. Dept. of the for Library of Congress

Interior. Library

The Fish and Wildlife Service series, Special Scientific Report--Fisheries, is catalogued as follows:

U. S. Fish and Wildlife Service.

Special scientific report: fisheries. no. 1-(Washington) 1949-

no. illus., maps, diagrs. 27 cm.

Supersedes in part the Service's Special scientific report.

1. Fisheries—Research.

SH11.A335

639.2072

59-60217

Library of Congress

CONTENTS

													Page
Introduction				•			•	•			•	•	1
Methods													
Sampling techni	ques			•			•	•		•	•		1
Enumeration of	Gymnodiniu	m brev	<u>e</u> .	•				•	• •	•	•	•	2
Chemical analys	es			•					• •	•	•		2
Acknowledgments								•	• •	•			3
Literature cited	• • • •			•						•	•		3
Explanation of colum	n headings			•	• •		•	•		•	•	•	4
Station data								•		•	•	•	5
	F	GURES											
Nos.													
1. Index map of so covered by the										18	•		216
2. Map of the Tamp	a Bay area	showi	ng s	tat	ion	100	ati	ons	s .	•	•	•	217
3. Map of the Charles locations					ing						•	•	218
4. Map of the Thou locations										•		•	219
5. Map of the Flor station locatio	ida Bay and	d Lake		ech		ar	eas	sł		ing	,		220

ABSTRACT

This report presents original data giving enumerations of the red tide organism, Gymnodinium breve, and associated chemical and hydrographic data for the period from February 1954 to July 1957. Methods of collecting and analyzing samples are described. It contains counts of G. breve, data on salinity, pH, copper, inorganic phosphorus, total phosphate, nitrate-nitrite, carbohydrates, and protein equivalents. These data were collected as part of a study on the distribution and incidence of G. breve, and related ecological conditions.

Extensive fish kills have occurred frequently in recent years, in the waters along the southwest Florida coast, accompanied by areas of discolored water. This condition, commonly known as red tide, is caused by blooms of the dinoflagellate Gymnodinium breve, Davis.

Earlier outbreaks of red tide have been described by Galtsoff (1948), Gunter et al. (1948), Lackey and Hynes (1955), Wilson and Ray (1956), and others. A bibliography of red tides in Florida waters was compiled by Hutton (1956).

Since the identification of G. breve in 1947, field studies have been conducted by the U. S. Fish and Wildlife Service to determine its incidence and distribution in Gulf coastal waters and to expand existing knowledge of associated ecological conditions. The phosphorus content of these waters from May 1949 through January 1951 has been published by the Service (Graham, Amison, and Marvin 1954). This was followed by a report on the oceanographic observations from May 1949 through July 1951 (Marvin 1955a). In continuation of the policy of publishing original data for the use of research agencies or individuals interested in the red tide problem, this report presents in tabular form the original hydrographic and biological observations for the period from February 1954 to July 1957.

The field work was discontinued from 1952 until it was resumed by the Service in early 1954, but laboratory work on the culture of G. breve was started in the interim. For some results of this work see Ray and Wilson (1957).

The sampling stations (figs. 1-5) extend approximately 210 miles along the Florida coast chiefly in the coastal and offshore waters from Clearwater to Marathon. The station locations, except for some that are in upstream rivers and canals, are in areas in which high concentrations of G. breve were found. Most stations fall within the 10-fathom line.

During the period covered by these data there was little red tide activity. The outbreak of 1952 was past, and the 1953-54 surgence was on the wane in 1955; from January 1955 through June 1957 no outbreaks were recorded.

METHODS

Sampling techniques

At the start of intensive field sampling in 1954, limited information was available on which to base techniques for G. breve sampling. Consequently, sampling equipment and methods have undergone changes to conform with expanding knowledge of the organism.

Sampling was chiefly from the research vessel Kingfish, a 43-foot, twinscrew diesel cruiser, equipped with depth recorder and radar. Samples have also been collected with smaller boats, and a seaplane was used extensively to reach shallow bays and other less accessible spots. Stations on canals and some at beaches and rivers have been sampled from the shore or bank.

Initially, surface water samples were taken with a galvanized iron bucket and subsurface samples by use of a 3-liter modified Kemmerer sampler. To eliminate possible metallic contamination of the samples a polyethylene bucket has been in use since October 1954 for surface samples. The subsurface sampler was replaced by a weighted polyethylene container in November 1954.

Immediately upon collection of a sample, water temperature was measured with a mercury centigrade thermometer to the nearest tenth of a degree. The hydrogen ion concentration was measured with either a portable Coleman pH meter or a pocketsize model manufacturered by the Analytical Measurement Company, Inc.

Water samples for estimation of G.

breve abundance were poured from the collection container into 2-liter Erlenmeyer flasks previously rinsed with a small amount of the sample water. During periods of high air temperature, wet newspaper was placed around the flasks to maintain a stable temperature. Pieces of polyethylene sheeting were placed over the mouth and secured to the flask neck with rubber bands to prevent spillage or contamination.

Water samples for salinity analysis were collected at all stations in 4-ounce Duraglass prescription bottles. Pyrex glass bottles of 250 ml. capacity with glass stoppers were used to collect water samples for copper analysis. Total phosphorus, inorganic phosphate, nitratenitrite, and carbohydrate and protein equivalents were determined from quickfrozen samples collected in 200 by 25 mm. pyrex glass culture tubes, fitted with polyethylene or polyethylene-lined screw caps. All containers used for sampling were chemically cleaned prior to use, and, after collection of the water sample, were sealed with plastic electrical tape for later analysis.

Enumeration of Gymnodinium breve

Water samples for <u>G</u>. <u>breve</u> analysis were usually examined within 24 hours after collection. Most of the samples were concentrated (the organisms given time to move to the surface of the sample) under 40-watt fluorescent lights, but available lighting was also used when a return to the field station was not feasible. Satisfactory concentration of the organism was obtained with lights from 8 to 18 inches above the flasks. The period of concentration at room temperature under ordinary conditions was ideally 16-18 hours, preferably overnight, and a minimum concentration period of 4 hours was observed.

Examination of sample aliquots for the living organisms was made with a stereoscopic, wide-field, inclined binocular microscope equipped with 18X wide-field eyepieces. The technique was as follows:

1. After the samples had been concentrated, three to six 1-milliliter aliquots were pipetted from the area just beneath the surface of the water sample and each deposited in the depression of a 3-depression micro-plate. If no G. breve

were found in these aliquots, the water sample was assumed to contain no <u>G</u>. breve and the count was recorded as none.

For general detection and for counting of both concentrated and mixed samples, magnifications of 54X and 144X were used.

2. If G. breve were observed in the initial concentrated aliquots, the flask was inverted several times to redistribute the organisms throughout the sample of water. Then, depending on the numbers of G. breve per milliliter (1-99; 100-1000; or more than 1000) in the examination of concentrated samples, 1.0 ml., 0.1 ml., or 0.01 ml. aliquot was pipetted from within the flask to each of 3 depressions in a micro-plate. The number of G. breve observed per milliliter or fraction was then recorded for each of the 3 aliquots. If the count did not agree in 2 out of 3 of these aliquots, an additional 3 aliquots were drawn from the flask and examined. The numbers of G. breve for all aliquots were averaged and shown as the number per milliliter of water. In cases where G. breve were found in the surface layer of a concentrated sample, usually in very low numbers, but not in the mixed, or when no counts were made of a mixed (or agitated) sample, the symbol P is used to indicate that the organism was present.

Counts were of the living organism; no preserved or fixed specimens were used. The counting technique assumes that after several inversions of the flask G. breve are randomly distributed. Until counts of such agitated samples were instigated in 1955, however, most of the concentrated samples were merely given an adjective rating for abundance.

Chemical analyses

Salinities were determined by the Mohr-Knudsen method described by Knudsen (1901), Nitrate-nitrite determinations were made by the method of Zwicker and Robinson (1944) as modified by Marvin (1955b).

The method of Robinson and Thompson (1948) was used to determine amounts of inorganic phosphates and the method of Harvey (1948) was used in total phosphorus determinations. Copper determinations were by the analytical method of Hoste,

Eeckhout and Gillis (1953).

Arabinose equivalents of carbohydrates were determined by the N-ethyl-carbazole method of Erdman as modified by Zein-Eldin and May (1958).

Tyrosine equivalents of protein content were determined by a method developed by Peter J. Wangersky as modified by Zoula P. Zein-Eldin and B. Z. May in which the amino-acid content equivalent to tyrosine is obtained by hydrolysis in 0.375 N sodium hydroxide solution.

The determination is carried out as follows:

- 1. Thaw frozen samples.
- 2. Pipette duplicate 20-ml. samples with a volumetric pipette into 50-ml. glass reagent bottles with ground glass stoppers.
- 3. Add 20 ml. of 0.75 N sodium hydroxide from an automatic burette.
- 4. Autoclave at 80 pounds for 2-3 hours.
 - 5. Centrifuge for 20 minutes.
- 6. Read on the Beckman spectrophotometer, using the optical density scale.
 Set wave length at 330 mµ and use the ultraviolet light source. Use the 5 cm. silica cells and read against distilled water.
- 7. Treat blanks and samples of tyrosince (1, 3, 5, mg. per liter) similarly. Blanks are made up in protein-free artificial sea water. Standards are made up in a low protein natural sea water, if available; otherwise, artificial sea water is used.

ACKNOWLEDGMENT

The authors are indebted to numerous co-workers for their advice and assistance in assembling the data contained in this report. K. T. Marvin, Z. Zein-Eldin, B. Z. May and L. Lansford made the chemical analyses and determinations. M. W. Jambor assisted in enumeration of G. breve and in tabulating data.

Albert W. Collier developed the sampling methods and William B. Wilson developed the enumeration techniques. Joe O.

Bell was in charge of the field work until March 1957.

The Florida State Board of Conservation, especially Ernest Mitts, Director, Robert M. Ingle and Dr. Robert F. Hutton cooperated in numerous instances by supplying patrol vessels and crews and other facilities.

LITERATURE CITED

GALTSOFP, PAUL S.

1948. Red tide. Progress report on the investigations of the cause of the mortality of fish along the west coast of Florida conducted by the Fish and Wildlife Service and cooperating organizations.

U. S. Fish and Wildlife Service, Special Scientific Report No. 46, 44 pp.

GRAHAM, HERBERT W., JOHN M. AMISON,
AND KENNETH T. MARVIN

1954. Phosphorus content of waters along the west coast of Florida.
U. S. Fish and Wildlife Service,
Special Scientific Report:Fisheries No. 122, 43 pp.

GUNTER, GORDON, ROBERT H. WILLIAMS, CHARLES C. DAVIS, AND F. G. WALTON SMITH

1948. Catastrophic mass mortality of marine animals and coincident phytoplankton bloom on the west coast of Florida, November 1946 to August 1947. Ecol. Monogr. 18(3):309-324.

HARVEY, H. W.

1948. Estimation of phosphorus and total phosphorus in sea water.

J. Mar. Biol. Assoc. U. K. (27): 337-359.

HOSTE, J., J. EECKHOUT, AND J. GILLIS
1953. Spectographic determination of
copper with curroine. Analytica
Chemica Acta. (9):263-274.

HUTTON, ROBERT F.

1956. An annotated bibliography of red tides occurring in the marine waters of Florida. Quart. Jour. Fla. Acad. Sci. Nos. 2-3, (19): 124-146.

ENUDSEN, M.

1901. Hydrographical tables. G. E. C. Grad, Copenhagen; 1-03.

LACKEY, JAMES B., AND JACQUELINE A. HYNES 1955. The Florida Gulf coast red tide. Engineering Progress at the University of Florida, 9(2):3-23.

MARVIN, KENNETH I.

coast Florida waters, 1949-52. U. S. Fish and wildlife Service, Special Scientific Report: Fisheries No. 149, 32 pp.

1955b. Notes on the precision of a modi- ZWICKER, B. M. G., AND R. J. ROBINSON fied routine nitrate-nitrite analysis. J. Mar. Res. No. 1, (14):79-ST.

RAY, SAMMY M., AND WILLIAM B. WILSON 1957. Effects of unialgal and bacteriafree cultures of Gymnodinium brevis on fish. U. S. Fish and Wildlife Service, Fish. Bull. 57 (123):469-496,

ROBINSON, REX J., AND THOMAS G. THOMPSON 1948. The determination of phosphates in sea water. J. Mar. Res. (7): 33-41.

WILSON, W. B., AND S. M. RAY 1956. The occurrence of Gymnodinium brevis in the western Gulf of Mexico. Ecology 37(2):388.

1955a Oceanographic observations in west ZEIN-ELDIN, ZOULA P., AND BILLIE Z. MAY 1958. Improved N-ethyl carbazole determination of carbohydrates with emphasis on sea water samples. Analytical Chemistry. In Press.

> 1944. The photometric determination of nitrate in sea water with a strychnidine reagent. J. Mar. Res. (5):214-231.

EXPLANATION OF COLUMN HEADINGS

Time Eastern Standard Time.

S of B Surface or bottom (occasionally M for mid-depth and actual depth Sal. in feet).

Concentrated sample. Shows C. absence (0), or presence (P) when PO4 no mixed counts were taken, of live cells in 3 (or 6) 1 ml. aliquots pipetted from surface of a 2-liter water sample after exposure from 4 to 24 (or more) hours to artificial light (usually 40watt fluorescent lamp 8 to 18 inches above surface of sample). P may also indicate that live cells were present in the concen- NO3 - NO2 trated sample when none were found in the mixed samples.

M. Mixed sample. Average number of live cells per ml. in 3 (or 6) 1 ml. aliquots from mear center of 2-liter water sample after several inversions of sample

flask to distribute organisms at random.

Salinity in parts per thousand.

Cu. Copper, µg-at/L.

Phosphate.

In. Inorganic phosphate.

µg-at PO4 - P/L

Total phosphate. Tot.

µg-at PO4 - P/L

Nitrogen. µg-at NO3 - NO2 -N/L

Carbohydrates. mg/L arabinose Car. equivalents.

Pro. Proteins. mg/L tyrosine equivalents.

Date	Time	S	G.	breve	На	°C	Sal.	Gu.	P	0,	NO ₃ -	Car.	Pro.
Date	1 11110	В	C.		F				In.	Tot.	2	001	
1955			_										
7/19	1352	S	0	-	8.1	31.1	36.38	0.04					
		В	0	-	8.2	30.0	36.38	0.06					
8/3	1347	S	0	-	-	30.6	36.24	0.93					
0/10	1220	В	0	-	-	30.3	36.22	0.65		0 =			
9/13	1220	S B	0	~	-	-	35.66 35.71	0.13	-	0.7 0.4			
9/28	1209	S	0	~	8.0	30.0	35. 16	0.01	1.5	2.3	0.8	0.9	0.4
,,	,	В	0	_	8.0	29.8	35.17	0.05	_	_	_	0.5	
11/2	1234	S	0	~	8.1	22.8	35.81	0.10					
		В	0	~	8.1	22.8	35.71	0.18					
1956													
2/1	1314	S	0	-	-	15.2	35.27	0.20		0.0	-	0.9	1.8
10/31	1100	B S	0	~	8.1	15.9 23.0	35.32 35.73	0.10	-	0.0	0.3	0.0	0.9
10/31	1100	В	0	_	8.2	22.7	35.70	0.02	_	0.1	0.2	1.7	0.3
11/15	1051	S	0	_	8.0	21.0	35.20	0.24	_	0.0	0.1	1.3	
		В	0	-	8.2	21.0	35.29	0.37	0.0	0.3	0.1	0.7	0.3
12/12	1327	S	P	-	on	19.5	36.13	0.06	~	0.0	1.1	1.6	0.8
1055		В	P	-	~	19.5	35,61	0.19	-	0.3	0.3	1.5	0.8
1957 1/9	1024	S	0			17.6	35.53			0.3	0.2		0.8
1//	1024	В	0	_	-	17.6	35.45	_	0.0	0.3	0.6	2.2	0.9
	CT A TTO			Danth	-£ 12								• • /
1954	STATIO	NA		Depth	01 12	ieet	27° 5	Z. 4. IV	_	82° 51	. 1. 14		
5/3	1355	S	0	-	_	29.0	34.13						
6/19	1600	S	0	-	_	28.5	35.16						
1955													
5/24	1250	S	0	-	-	30.4	36.20						
6/13	1558	S	0	-	•	30.0	36.26						
7/20	1448	S	0	-	-	32.5	25 00						
7/26 8/10	1330 1440	S S	0	_	-	32.2 34.0	35.88 35.62						
8/23	1330	S	0	_	_	33.5	34.87						
8/29	1625	S	0	_		31.3	01,01						
9/28	1030	S	0	~	_	30.5	34.78						
10/5	1400	S	0	~	-	30.1	35.17						
11/2	1010	S	0	-	-	21.8	35.11						
11/15	1335	S	0	~	-	24.0	34.92						
11/29 12/7	1315 1525	S S	0	ent	-	18.0	34.96						
12/7	1350	S	0	_	-	18.6	33.78 34.49						
/ 0	2000			_	_	20,0	/						

	0 1 1 1 1 1	0-4-22	2 100	J. 14 (4)									
		S									NO -		
Date	Time	07	C	breve	DI	°C	Sal.	Cu.	P	04	NO3-	Car.	D=0
2410		В		M.		0	Jen.	ou.			NO ₂	Car.	Fic
				2128					In.	Tot.			
1956													
1/10	1515	S	0	_	_	12.0	30.77						
2/1	1104	S	0	-	-	17.5	34.40						
3/8	0755	S	0	_	-	22.5	35.53						
4/12	0815	S	0	_	_	17.1	36.12						
5/10	1115	S	0	_	_	27.0	30.51						
	STATIC	A MC	3	Dept	h oi	30 feet	27	5011	V	82°	57.81	W	
1955													
7/19	1328	S	0	-	-	30.8	36.24						
		В	0	-	-	30.0	36.24						
7/20	1050	S	0	_	-	30.8	36.20						
		B	0	_	407	30.5	36.35						
9/13	1201	S	0	_	-	30.0	35.90						
		В	0	_	_	30.0	35,88						
9/28	1155	S	0	-	_	29.9	35.14						
* /		3	0	_	_	29.8	35.14						
11/2	1219	S	0	-	_	22.0	35.71						
11/2	101/	3	0	_	_	23.0	35.81						
1956		2	0	_	_	20.0	22,01						
2/1	1250	c	0			15.5	35.34						
2/1	1250	S		-	-								
10/21	111/	В	0	-	-	15.8	35.70						
10/31	1116	S	0	_	-	23.2	36.01						
/		3	0	-	-	23.0	36.04						
11/15	1107	S	0	-	-	21.0	35.29						
		3	0	-	-	21.0	35.50						
1957													
1/9	1043	S	0	-	-	18.0	35,46						
		B	0	-	-	13.2	35.81						
	STATIC	A VC	4	Den	h of	20 feet	27	5011	V.	82°	53, 41	W	
1955				2000		50 100.			_		331.		
7/19	1453	S	0		_	30.8	36,38						
. / - /	1123	В	0	_		30.0	36.29						
7/20	0831	S	0	-	-	30.1							
1/20	0001	3 B		-	-		36.26						
0.10	1220		0	-	-	30.5	37.07						
8/3	1239	S	0	_	-	30.6	36.04						
0/10	12.40	3	0	_	-	30.0	36.04						
9/13	1242	S	0	-	-	30.0	35.48						
		В	0	-	-	30.6	35.43						
9/28	1228	S	0	-	-	29.9	35.08						
		B	0	-	-	29.9	35.01						
11/2	1321	S	0	-	-	22.5	35,44						
		В	0	_	-	22.7	35.39						

		S						_	D	^	NO3-		
Date	Time	or	G. i	oreve	На	°C	Sal.	Cu.	P	04	NO	Car.	Pro.
		B		М.	-				In.	Tot.	2		
1956													
2/1	1343	S	0	-	-	17.1	35.03						
		В	0	-	-	16.1	35.09						
10/31	1032	S	0	-	-	22.9	35.56						
		В	0	-	-	22.5	35.40						
11/15	1026	S	0	-	-	20.8	34.68						
		В	0	-	-	20.7	34.72						
12/12	1345	S	0	-	-	18.7	34.93						
		В	0	_	-	18.6	34.85						
1957		_	_										
1/1	1001	S	0	_	_	17.5	34.92						
		В	0	_	-	17.7	34.87						
	STATIC	N A	5	Dept	h of	9 feet	27	48.3	31 N	82 =	47.71	74	
1954													
3/30	0947	S	0	-	-	24.3	27.83						
1955													
2/1	1520	S	0	-	-	15.4	33.03						
		В	0	-	-	15.0	33.08						
5/24	1310	S	0	-	-	30.1	36.22						
		В	0	-	-	29.7	36.13						
6/13	1625	S	0	-	-	29.8	35.26						
7/20	1520	S	0	_	-	31.5							
7/26	1353	S	0	-		30.6	35.55						
8/10	1630	S	0	-	_	32.8	34.18						
8/23	1353	S	0	_	-	32.3	33.01						
8/29	1645	S	0	-	-	31.0	32.57						
9/28	1105	S	0	_	-	30.1	32.45						
10/5 11/2	1420	S S	0	-	-	30.0	33.82						
11/2	0945 1245	S	0	-	-	21.2	34.32						
11/15	1340	S	0	-	-	19.2	34.30						
12/7	1500	S	0	-	-		34.85 33.97						
12/28	1330	S		_	-								
1956	1550	ې	0	-	-	18.6	34.23						
1/10	1445	S	0			12.0	34.70						
2/1	1005	S	0	_	-	18.0	32.82						
3/8	0835	S	0	_	_	23.0	35.40						
4/12	0835	S	0	_	_	17.8	36.50						
5/10	1055	s	0	_		26.0	37.13						
7/17	1103	S	0		_	30.7	36.46						
1/1/	1100		0	_	_	50.	20, 10						

	STATIC)N A	6	Dep	oth of	20 feet	27°	46.51	N_	82° 50	ı W		
		S								PO	NO-		
Date	Time	or			pH	°C	Sal.	Cu		4	NO_2^3	Car.	Pro.
1954		В	C.	M	•				In.	Tot.			
2/19	0020	c	0			10.0	22 41						
2/17	0920	S	0	-	-	19.0	33.41						
6/20	1425	B S	0	_	-	18.2	33.91						
6/30	1435		P	-	-	31.5	34.43						
0 /11	1120	В	0	840	_	30.7	34.52						
8/11	1130	S	0	-		30.3	34.36						
0/14		В	0	**	_	30.1	34.40						
9/14	1315	S	0	-		29.2	34.09						
		В	0	-	-	29.0	34.14						
1955													
2/16	1335	S	0	-		17.5	33.53						
		В	0	840	-	14.2	34.40						
6/29	0749	S	0	-	7.8	30.0	36.55						
		В	0	840	7.9	30.0	36.55	0.07					
7/19	1517	S	0	-	8.2	31.1	36.35	0.10					
		В	0	-	8.2	30.0	~	0.04					
8/3	1208	S	0	-	848	29.4	36.06	0.28					
		В	0	₩	-	28.9	35.99	0.91					
9/28	1247	S	0	-	8.2	29.9	34.60	0.04		-	_	2.5	1.2
		В	0	-	8.1	30.0	34.85	0.06	84	_	_	2.2	0.9
11/2	1340	S	0	-	8.0	23.0	35.44	0.29					
		В	0	-	8.0	22.8	35.44		0.6	0.9	2.2	6.8	2.3
1956													
2/1	1410	S	0	_		17.2	35.01	0.05	0.0	0.0	0.0		1.3
		В	0	**	_	17.1	35.06	0.07					
3/15	0830	S	0	-	8.0	22.2	35.80	0.03	1.1	1.3	240	0.8	1.0
		В	0	**	8.0	22.2	35.76	0.02		0.9	-	0.8	0.2
5/10	1415	S	0	-	8.2	26.4			0.1	1.0	0.0	0.7	0.9
		В	0	84	8. 2	26.1	36.55	0.42	0.2	0.6	0.0	1.1	0.0
6/11	1645	S	0	_	8. 1	27.9	36.92	0.03	0.1	0.8	0.0	1.0	0.1
.,		В	0	-	8. 1	27.9	36.79		0.2	0.5	0.1	3.7	0.0
7/16	1640	S	0	_	8. 2	30.4	36.74		0.2	0.5	0.1	2. 1	0.6
.,20	1010	В	0		8. 2	29.6	36.84		-	0.1	2.2	1. 1	0.1
9/11	1235	S	0	_	8.2	26.9	37.31	0.03	0.2	0.5	3.1	1. 2	0.1
// **	1233	В	0		8.3	27.0	37.30	0.04	0.1	0.6	1.0	1.2	0.2
10/31	1018	S	0		8. 1	22.8	35.82	0.01	0.2	0.2	0.9	1.3	0.2
10/51	1010	В	0	_	8.2	23.0	35.88	0.59	0.2	0.2	0.2		0.1
11/15	1001	S	0		8. 1	20.5	34.61	0.23	0.3	0.4	0.0	1.3	0.6
11/15	1001	В		-	8. 2	21.2	34.75	0. 23	0.5	0.5	0.0	0.7	0.2
12/12	1404	S	0 P	-	0, 2	19.0	34.77	0.13	U. 5 ∞	0.3	0.6	0.4	0.4
16/16	1704	В	0	_	_	18.9	35. 10	0.58		10.1	0.3	0.9	0.4
1957				_	_			0.50	0.0				
1/9	0939	S	0	00	-	17.4	34.92	**	84	0.1	0.5	2.1	0.9
		В	0	00	**	17.4	35.15	**	0.2	0.3	1.0	1.0	0.4
2/5	1617	S	0	**	8.0	22.2	35,53	0.24	0.3	94	3.0	1.3	0.0
		В	0	-	8.0	21.7	35.62	0.64	0.3	0.9	0.4	0.5	0.4

Date	Time	S	G. b	reve	рН	°C	Sal.	Cu.	P	04	NO-3	Car.	Pro.
		В	C.	M.			•	•	In.	Tot.	2		
1954								-					
3/30	0925	S	0	-	_	23.2	32.51						
5/3	1200	S	0	-	-	28.5	34.52						
6/19	0900	S	P	**	-	28.0	32.51						
1955													
2/1	1452	S	0	**	-	14.5	33.10						
		В	0	-	-	14.5	33.13						
4/28	1000	S	0	-	-	24.7	35.37						
5/24	1330	S	0	-	-	29.5	35.93						
6/13	1635	S	0	-	-	29.7	0.5.50						
7/20	1 5 45	S	0	**	-	30.9	35.50						
7/26	1406	S S	0	-	-	31.1	35, 48						
8/10 8/23	1510 1410	S	0	-	-	32.0	35.44						
8/29	1700	S	0	-	-	32.6 30.6	33.64 33.08						
9/28	1120	S	0	_	-	29.8	34.04						
10/5	1430	S	0	_	_	30.2	34.25						
11/2	1035	S	0	_	_	21.9	34.64						
11/15	1400	S	0	_		23.4	34.83						
11/29	1350	S	0	_	***	19.9	35.32						
12/7	1556	S	0	-	-	20.0	34.76						
12/28	1415	S	0	-	-	17.5	34.65						
1956													
1/10	1547	S	0	-	-	12.5	31.36						
1/17	1335	S	0		-	12.0	34.66						
2/1	1128	S	0	-	-	17.3	34.41						
2/14	1015	S	0	-	***	19.0	34.98						
2/29	1027	S	0	-	-	17.5	35.33						
3/8	0855	S	0	-	-	23.1	35.35						
3/14	0910	S	0	-	-	23.5	34.63						
3/26	1150	S	0	••	-	18.0	36.78						
4/3	1000	S	0	••	-	21.5	36.38						
4/12	0725	S	0	-		18.0	36.29						
4/18	1255	S	0	-	-	22.0	36.30						
4/25	0940	S	0	•••	-	22.0	36.15						
5/10	1150	S	0	-	-	26.6	36.54						
6/26	1310	S	0	-	-	30.5	36.47						
7/17	1056	S S	0	-	-	30.5	36.96						
7/30 8/6	1230 0815	S	0	***	-	30.0 30.5	36.25 37.19						
8/13	0946	S	0	00	-	30.0	36.88						
8/27	1130	S	0	es	_	31.0	36.47						
9/4	0830	S	ő	***	-	29.7	37.31						
// -													

Data	m:	S		1.		0.0	C 1	-	P	04	NO-		
Date	Time	or B	C.	breve M.	pН	°C	Sal.	Cu.	In,	Tot.	NO ₂	Car.	Pro.
9/12	0900	S	0			25.2	36.59		والل	101.			
9/24		S	P	_	_	27.0	37.14						
10/2	1040	S	P	_	_	27.2	36.65						
10/8	0835	S	0	-	-	26.1	34.98						
10/17		S	0	_		22.7	35.93						
10/25		S	0	_		24.2	35.34						
11/1	1008	S	0	_	-	23.0	35.66						
11/7	0936	S	0	•		22.0	35, 24						
11/15		S	0	-	-	20.7	36.23						
11/19		S	0	_	_	21.2	34.76						
11/26		S	P	_	-	18.5	34.48						
12/3	0935	S	0	_	-	16.5	34.59						
12/11		S	0	-	_	19.0	34.76						
12/20		S	0	-	_	22.0	34.99						
1957													
1/9	1225	S	0	_	-	18.3	35.33						
1/15	0915	S	0	040	-	19.5	34.68						
1/22		S	0	**	-	16.5	34.80						
1/28		S	0	-		20.0	34.66						
2/5	0845	S	0	-	-	23.0	35.04						
2/11	0838	S	0	-	-	23.0	35.23						
2/26	0919	S	0	-	-	20.5	34.72						
3/7	1250	S	P	-	-	20.7	34.67						
3/12	0920	S	0	_		17.5	34.49						
3/18	1153	S	0	-	-	20.3	34.93						
3/28	1445	S	0	-	-	21.5	34.19						
4/8	1009	S	P	-	-	24.3	34.60						
4/17	0851	S	0	948	-	21.5	33.97						
4/22	1645	S	P	***	-	25.7	34.58						
5/3	0804	S	0	•	-	26.2	33.98	•					
5/7	1055	S	P	-	-	24.0	34.02						
5/14	1328	S	0	-	-	28.2	33.92						
5/21	0838	S	0	-	-	30.0	34.19						
5/27	0950	S	0	-	-	30.3	34.59						
6/3	0850	S	0	-	-	29.0	33.16						
6/11		S	0	***	-	28.7	34.84						
6/17	0840	S	0	-	•	28.7	34.12						
	STATIO	ON A	8 4	De	pth o	of 7 feet	t	27°	45.3	N	82° 4	5.71 W	Ţ.
1954							20.00						-
3/30		S	0	-	-	23.5	32.29						
6/19	0915	S	P	•	-	27.7	35.14						

		S							D	04	NO3-		
Date	Time	or	G. bi	eve	pН	°C	Sal.	Cu.		4	NO		Pro.
		В	C.	M.					In.	Tot.	2		
1955													
2/1	1545	S	0	**		15.4	33.33						
5/24	1353	S	0	-	•	30.3	35.72						
6/13	1713	S	0	-	04	29.9	36.78						
7/20	1600	S	0	-	-	31.5	35.07						
7/26	1430	S	0	10	80	30.6	35.39						
8/10	1520	S	0	•		32.3	34.65						
8/23	1425	S	0	••	••	32.0	32,66						
8/29	1730	S	0	-	-	30.3	31.26						
9/28	1145	S	0	•	**	29.4	32.41						
10/5	1500	S	0	-	-	30.2	33.71						
11/2	1100	S	0		00	22.5	33.99						
11/15	1430	S	0	-	00	23.1	34.74						
11/29	1415	S	0	-	-	19.3	34.90						
12/7	1625	S	0	•	•	20.5	34.67						
12/28	1455	S	0		**	18.0	34.31						
1956													
1/10	1612	S	0	-	•	13.0	31.85						
2/1	1150	S	0	•	14	19.5	34.35						
3/7	0905	S	0	-	-	23.7	34.91						
4/12	0650	S	0	-	-	17.5	36.04						
5/10	1230	S	0	-	-	27.0	36.51						
S	TATIO	NA '	9	Dep	oth of	47 fee	t	27°	44.5	N_	83° 0	0 t W	
1954			_				-						
6/30	1316	S	0		-	31.3	35.37						
·		В	0	-		29.7	35.48						
8/11	1215	S	0	-		30.3	35.34						
·		В	0		_	29.8	35.68						
9/14	1420	S	0	940		29.3	35.43						
1955		В	0		84	29.2	35.50						
2/16	1154	S	0	•	**	14.0	33.10						
		В	0	-	-	14.4	35,50						
6/29	0832	S	0		н	30.0	36.06						
		В	0	-	**	28.8	35.63						
7/19	1253	S	0	-	00	30.3	36.49						
		В	0		•	30.3	36.55						
8/3	1432	S	0	**	-	30.6	36.42						
		В	0	~	••	29.4	36.36						
1956 10/31	1148	S	0	-	-	24.6	36.07						
10/51	1140	В	0	_	_	24.5	36.74						
12/12	1242	S	Ö	_	-	19.4	35.96						
		В	0	••		19.4	36.10						

	STATIO	ON A	10	Dept	h of	5 feet	27° 4	14.21 N		32° 45.	31 W	
		S							P	0	NO -	
Date	Time	or		reve	рН	°C	Sal.	Cu.		4	NO ³	Pro.
		B	C.	M.					In.	Tot.	2	
1954												
2/19	0900	S	0	449		18.2	33.17					
		В	0	-	-	18.2	33.21					
5/3	1305	S	P	-	•••	28.8	33.95					
1955												
2/1	1428	S	0	-	**	16.9	33.42					
5/24	1345	S	0	-	**	30.6	35.89					
6/13	1655	S	0	-	-	30.0	3 6.73					
7/20	1612	S	0	-	-	30.5	35.59					
7/26	1422	S	0	**	**	32.8	36.06					
8/10	1530	S	0	-	**	33.3	35.81					
8/23	1438	S	0	-	-	32.8	34.40					
8/29	1715	S	0	-	00	31.5	35.23					
9/28	1125	S	0	440	04	29.8	34.29					
10/5	1445	S	0	~	**	31.2	34.52					
11/2	1050	S	0		-	23.5	35.08					
11/15	1415	S	0	-	-	25.0	34.92					
11/29	1405	S	0	-	-	19.9	35.25					
12/7	1615	S	0	~		20.5	34.84					
12/28	1445	S	0	~	-	20.0	34.11					
1956		_										
1/10	1600	S	0	-	-	13.5	31.87					
2/1	1140	S	0	-	-	17.6	34.92					
2/14	1025	S	0	-	**	18.2	34.71					
2/29	1035	S	0	-		17.8	35.21					
3/7	1755	S	0	-	~	23.5	35.48					
3/14	0915	S	0	-		23.5	35.45					
3/24	1005	S	0	-	-	21.5	36.65					
3/26	1200	S	0	-	**	18.4	36.31					
4/12	0705	S	0	-	-	18.0	36.30					
4/18	1300	S	0	-	_	22.5	36.37					
4/25	0945	S	0	-	04	22.0	36.28					
6/11	1738	S	0	-	-	28.2	37.34					
6/26	1215	В	0	-	-	28.2	37.17					
6/26 7/17	1315 1118	S S	0	-		31.0	37.66					
7/17	1235	S	0	_		30.7	36.74					
8/6	0820	S	0	-	-	30.0	36.73					
8/13	0951	S	0	-		31.0	37.07					
8/27	1138	S	0	••	-	29.5	36.53 36.96					
9/4	0837	S	0		-	29.5						
7/*	0031	3	U	••	-	47.5	37.56					

26.8 36.52

24.7 37.74

9/12 0840 S

9/24 0913

S 0 S 0

Date	Time	S	G. 1	oreve	рН	°C	Sal.	Cu.		PO ₄	NO-	Car.	Pro.
Date	1 11110	В	C.	M.	P11		Jar		In.	Tot.	- NO ₂		
10/2	1050	S	0			27.2	36.57						
10/8	0842	S	0	_	040	26.2	35.49						
10/17	1145	S	0	-	-	22.8	34.76						
10/25	1000	S	0	-	***	24.5	35.51						
11/1	1012	S	0	-	-	23.0	35.67						
11/7	0942	S	0	000	-	22.2	35.42						
11/15	1044	S	P	-		20.5	34.50						
11/19	1006	S	0	-	-	21.0	34.85						
11/26	1228	S	0	-		18.0	34.88						
12/3	0938	S	0	040	010	16.0	34.85						
12/11	1200	S	0	-	-	19.2	34.79						
12/20	1518	S	0	-	-	22.0	38.97						
1957													
1/9	1234	S	0	-	_	19.0	35.44						
1/15	0923	S	0	-	₩	19.7	34.90						
1/22	1003	S	0		-	17.0	34.60						
1/28	1128	S	P	-	-	20.5	34.83						
2/5	0852	S	0	-	-	23.3	35.11						
2/11	0845	S	0	-	-	23.0	35.19						
2/26	0925	S	0	-	_	20.5	34.64						
3/7	1300	S	0	-	-	20.3	33.57						
3/12	0927	S	0	0-0	0=0	17.5	34.08						
3/18	1200	S	0	⇔	-	21.2	34.76						
3/28	1438	S	0		₩	22.0	34.30						
4/8	10 15	S	0	-		24.2	32.95						
4/17	0859	S	P	-	-	21.2	33.14						
4/22	1640	S	P	-	~	27.0	32.41						
5/3	0810	S	0	-	-	26.0	33.12						
5/7	1100	S	0	₩	-	23.5	33.57						
5/14	1334	S	0	•	-	29.5	33.62						
5/21	0844	S	0	-	***	29.5	33.70						
5/27	0955	S	0	000	-	30.2	34.11						
6/3	0855	S	0	-	-	28.5	32.17						
6/11	0919	S	0	970	-	29.0	24.35						
6/17	0845	S	0	-	-	28.5	32.27						
	STATIC	ON A	. 11	Dept	h of	12 feet	27° 4	4.7'1	N	82° 44	1.81 W		
1954 3/30 1955	0810	S	0	040	940	24.4	31.46						
2/1	1325	S	0	-	0=0	15.3	33.42						
5/24	1430	S	0	-	040	30.6	35.89						
,		В	0	_	-	29.3	35.89						
6/13	1755	S	0	***	-	28.9	36.91						

	0 1 1 1 1 1	214 21	(Oont d	1								
		S							P	04	NO -	,	
Date	Time	or	G.	breve	рН	°C	Sal.	Cu.		4	3	Car.	Pro.
		В	C.	M.	•				In.	Tot.	NO ₂		
7/20	1650	S	0	040		30.4	35.07						
7/26	1520	S	0	_	_	31.1	35.03						
8/10	1607	S	0	-	-	31.0	34.27						
8/23	1522	S	0	99	_	32.3	31.33						
8/29	1815	S	0	-	-	30.5	30.17						
9/28	1220	S	0	-	-	31.1	31.62						
10/5	1540	S	0	-		31.8	31.56						
11/2	1145	S	0	-	-	21.8	34.27						
11/15	1515	S	0	-	-	23.7	34.74						
11/29	1452	S	0	-	-	18.1	34.87						
12/7	1640	S	0	-	80	21.5	34.06						
12/28	1540	S	0	-	-	18.7	34.00						
1956													
1/10	1715	S	0	**	99	12.5	33.31						
2/1	1225	S	0	-	-	20.8	34.29						
3/7	1750	S	0	-	=	24.2	35.00						
4/11	1710	S	0	**	-	19.5	35.97						
5/10	1240	S	0	-	-	27.0	36.68						
6/7	1719	S	0	-	-	28.5	37.25						
7/17	1114	S	0	-	min .	30.8	36.73						
	STATIC	N A	12	Dept	h of 4	5 feet	27° 4	2.41 N		83° 00°	W		
1955													
7/19	1236	S	0	**	_	30.0							
		В	0	_	-	30.0	36.49						
9/13	1131	S	0	-	-	30.1	36.02						
		В	0	-	-	30.1	36.02						
9/28	1120	S	0		-	29.8	35.91						
		В	0	-	-	29.7	35.90						
11/2	1145	S	0		-	23.0	36.11						
		В	0	**	-	23.5	36.15						
1956													
2/1	1214	S	0	-	-	15.9	36.24						
		В	0	-	•	16.6	36.31						
3/15	0922	S	0	-	-	22.1	36.57						
		В	0	-	000	22.0	36.48						
10/31	1201	S	0	0.2	-	24.6	36.82						
		В	0	-	-	24.6	36.70						
11/15	1145	S	0	•••	-	22.0	35.90						
		В	0	**	+	22.0	35.95						
12/12	1234	S	0	-	-	20.0	35.87					٠	
1957		В	P		-	20.0	36. 18						
1/9	1120	S	0	_	-	18.3	35.81						
		В	0	***		18.3	35.97						

		S							P	04	NO3-	C	10
Date	Time	or	G. b		pН	°C.	Sal.	Cu.			NO ₂	Car.	Pro.
		В	C.	М.					In.	Tot.	2		
1954													
6/30	1500	S	P	-	-	31.5	35.01						
		В	0	-	-	30.3	34.94						
8/11	1027	S	0	-	-	30.3	34.99						
		B	0	-	-	30.2	35.34						
9/14	1240	S	0	-		29.1	34.40						
		В	0	00	_	29.1	34.52						
1955													
2/16	1359	S	0	•	wa	16.3	33.53						
		В	0	-	-	14.2	35.08						
7/19	1547	S	0	-	-	30.8	36.42						
		В	0	-	***	30.0	36.55						
7/20	1147	S	0	-	049	30.6	36.55						
		В	0	-	-	30.5	36.55						
11/2	1402	S	0	-	••	23.2	35.91						
		В	0	-	-	23.0	35.88						
12/8	0900	S	0	•	7.9	19.6	35.78	0.07	**	0.2	-	-	3.9
		В	0	-	8.0	19.6	36.05	0.19	0.6	0.6	-	2.0	1.0
1956													
5/10	1352	S	0	-	8.2	26.1	36.52	0.00	0.1	0.4	0.0	0.7	0.9
		В	0	-	8.2	26.1	36.68	0.00	-	0.1	0.1	4.4	0.0
6/11	1624	S	0	-	8.1	27.9	37.00	0.07	0.2	0.6	4.0	0.8	0.1
		В	0	-	8.1	28.0	36.91	0.08	0.1	2.0	0.7	1.4	0.0
7/16	1620	S	0	-	8.3	30.0	37.02	0.05	•	0.2	0.3	2.0	0.1
		В	0	-	8.2	29.0	37.02	0.08	949	0.5	0.4	1.3	0.0
9/11	1212	S	0	-	8.3	27.5	36.99	0.03	0.2	0.4	7.8	0.8	0.2
		В	P	-	8.3	27.7	36.96	0.04	0.2	0.7	0.4	0.8	0.2
10/31	0947	S	0	-	8.2	23.3	36.78	-	0.1	0.1	0.4	0.6	0.5
		В	0	-	8.3	23.0	36.92		0.1	0.1	0.1	1.3	0.1
11/15	0936	S	0	-	8.2	21.0	35.64	0.42		0.9	0.5	2.0	0.4
		В	0	-	8.2	21.0	35.45	0.31	0.1	0.2	1.2	0.3	0.1
12/12	1430	S	0	-	-	19.0	35.11	0.56	-	0.1	0.5	1.1	
		В	0	-	-	19.0	35.62	0.10	0.1	1.4	0.7	0.4	0.2
1957													
1/9	0918	S	0	-	-	18.0	35.38	0.04		0.2	0.6	0.9	0.7
		В	0	-	**	18.0	35.40	0.00		0.4	0.9	1.2	2.9
2/5	1559	S	0	-	8.0	22.7	35.32	0.14		0.9	0.1	1.8	0.5
		В	0	***	8.1	21.4	000	0.26	0.3	0.3	0.0	0.4	0.3

Data	Time	S	C 1		_ ***	0.0	S-3	C	P	04	NO -		D
Date	Time	or B	G. b	M.	pН	°C	Sal.	Cu.	In.	Tot.	NO_2	Car.	Pro.
1954										100			
2/19	1010	S	0	-	-	18.8	33.33						
		В	0	***	-	18.0	33.77						
1955													
6/28	1714	S	0	-	-	30.5	3 6.11						
- /		В	0		-	30.6	36.29						
7/20	0737	S	0	-	-	30.0	36.11						
0./2	1145	В	0	••	-	30.0	36. 18						
8/3	1145	S	0	-	-	30.0	36.02						
0/12	1222	В	0	040	••	28.9	35.95						
9/13	1332	S B	0	••	-	30.5	34.78 35.25						
9/28	1312	S	0	_	-	29.9	34.74						
1956	1712	В	0	_	_	30.0	34.67						
3/15	0751	S	0	_		22.5	35.65						
		В	0	_	-	22.3	35.59						
5/10	1440	S	0	***	-	26.5	36.27						
		В	0	-	-	26.3	36.61						
6/11	1558	S	0	***	646	28.1	37.07						
		B	0	-		28.2	37.10						
7/16	1701	S	0	•	-	30.5	36.75						
		В	0	-	-	30.0	36.68						
9/11	1301	S	0	-	•	27.5	37.09						
10/21	0000	В	0	***	-	27.5	37.96						
10/31	0928	S	0	04	_	22.8	36.08						
11/15	0015	B S	0	-	-	22.7	36.10						
11/15	0915	B	0	_	_	20.5	35.11 35.05						
12/12	1447	S	0	-	_	19.0	35.13						
10/10	1111	В	0	-	-	18.7	35.38						
1957						100.	33,30						
1/9	0858	S	0	-	**	17.8	35.65						
		В	0	-	040	17.8	35.70						
2/5	1643	S	0	-	-	22.3							
		В	0	-	-	21.5	35.33						
	STATIC	ON A	. 15	Dep	th of	12 feet	27° 4	l! N		82° 4	4.31 W		
1954												-	
3/30	0830	S	0	-	-	23.3	31.64						
5/3	1325	S	0	-	648	28.5	34.04						
6/19	0940	S	P	***	000	28.2	34.99						
1955 2/1	1350	S	0			16 0	33.58						
2/16	1441	S	0	_	_	16.8 14.9	33.44						
2/10	TITI			_		2 4 4 /	55.11						

		S							P	04	NO.	-	
Date	Time	or		reve	pН	°C	Sal.	Cu.			NO_	Car.	Pro.
		В	C.	M.					In.	Tot.	2		
4/28	1016	S	0	-	-	25.1	35.44						
5/24	1410	S	0	-	-	30.4	35.72						
6/13	1731	S	0	-	00	30.2	36.83						
6/28	1731	S	0	-	-	31.5	36.29						
7/19	1701	S	0	-	-	30.6	35.19						
7/20	1634	S	0	•	-	30.2	35.77						
7/26	1500	S	0	•	-	33.3	35.61						
8/10	1550	S	0	-	-	34.0	35.75						
8/23	1505	S	0	-	-	32.2	32.75						
8/29	1750	S	0	-	-	31.0	33.89						
9/28	1204	S	0	-	•	31.3	34.58						
10/5	1520	S	0	-	-	30.8	34.43						
11/2	1126	S	0	-		23.0	34.98						
11/15	1450	S	0	-	-	24.2	34.83						
11/29	1435	S	0	••	-	18.1	35.25						
12/7	1640	S	0	om	-	19.2	34.85						
		В	0	-	-	19.1	34.87						
12/28	1520	S	0	-	-	18.1	34.56						
1956													
1/10	1635	S	0	-	-	12.5	31.74						
2/1	1201	S	0	04	-	19.5	34.75						
2/14	1040	S	0	•	-	19.0	34.45						
2/29	1045	S	0		-	17.3	35.03						
3/7	1815	S	0	-	-	22.9	35.27						
3/14	1636	S	0	-		24.4	35.34						
		В	0	-	-	24.3	35.27						
3/26	1205	S	0	-	-	18.0	36.31						
4/3	1015	S	0	-	***	22.0	36.30						
4/15	1730	S	0	-		19.2	35.34						
4/18	1310	S	0	••		22.4	36.13						
4/25	0955	S	0	-	-	22.0	35.91						
6/7	1735	S	0	-	-	27.7	37.20						
6/11	1804	S	0	-	•	28.1	37.29						
		В	0		-	18.1	37.32						
6/26	1323	S	0	•	-	31.0	37.17						
7/16	1720	S	0		-	31.7	36.96						
		В	0	-	-	31.1	37.02						
7/30	1245	S	0	-	-	30.0	36.47						
8/6	0826	S	0	-	-	30.5	37.11						
8/13	0959	S	0	-	_	29.5	36.70						
8/22	1145	S	0	-	_	31.0	36.95						
9/4	0844	S	0	-		30.0	37.25						

	SIAIIC	11 22	15 10	70110 07										
		S					G 1			P	O_4	NO -	Car.	Pro.
Date	Time	or B	G. b	M.	pН	°C	Sal.	Cu.	In.	,	Tot.	NO 2		
9/24	0924	S	0	_	-	26.5	36.08							
10/2	1057	S	0	_	100	27.2	36.70							
10/2	0820	S	0	per	₩.	26.0	35.15							
10/17	1153	S	0	-	_	23.0	34.23							
10/25	1008	S	0	_	-	24.4	35.87							
10/30	1555	S	0	-	-	23.3	35.95							
10/50	1000	В	0	-	_	23.0	35.99							
11/2	1022	S	0	-	-	22.3	35.14							
11/15	1052	S	0	-	-	20.5	34.80							
11/15	0853	S	0	-	cont	20.3	34.73							
11/10		В	0	-	-	20.5	34.65							
11/19	1014	S	P	-	-	21.2	35.36							
11/27	0745	S	0	-	-	17.0	34.54							
12/3	0943	S	0	-	-	16.5	35.00							
12/11	1205	S	0	-	-	19.0	35.02							
12/12	1503	S	0	-	-	19.0	34.95							
12/12	1505	В	0	took .	_	19.3	35.10							
12/20	1521	S	0	_	-	21.3	32.22							
1957		_												
1/8	1600	S	0	_	-	18.7	35.83							
2/0		В	0	_	_	18.7	35.50							
1/9	1241	S	0	_	-	19.0	35.36							
1/15		S	0	-	-	19.7	35.12							
1/22		S	0	-	-	16.8	34.60							
1/28		S	P	_	010	19.5	35.02							
2/6	0740	S	0	-	-	22.6	34.97							
-, -		В		-	-	22.7	34.99							
2/11	0850	S		-	-	23.0	35.17							
2/26		S		-	-	20.5	34.32							
3/7	1307	S	0	-	-	20.5	34.37							
3/12		S	0	-	-	17.5	34.81							
	1240		P	940	-	21.2								
3/28			0	-	-	21.2	35.08							
4/8	1022		P	-	-	24.0	34.30							
4/17	7 0845	S	P	-	-	21.5	33.71							
4/23		S	0	-	-	24.5	34.33							
5/3	0815	S	0	-	-	26.0	33.51							
5/7	1107		0	-	-	24.0	33.73							
5/1	4 1341		0	-	-	27.0	33.35							
5/2				-	-	29.5	34.17							
5/2	7 1000			_	-	30.0	34.00 33.21							
6/3	0902			-	-	28.8	34.26							
6/1				-		28.7								
6/1				-	_	40.1	33.72							
6/2	5 1134	1 5	5 0		_	-	55012							

	STATIC	A NC	16	Dep	th of	9 feet	27°	41.51 N	1 8	32° 40,	71 W	7	
Date	Time	s or B	G. b	oreve M.	pН	°C	Sal.	Cu.	PC	Tot.	NO 3 NO 2	Car.	Pro.
1954													
5/3	1435	S	0	_	_	28.3	30.81						
1955	1133	D	Ü	_	_	20,5	30,01						
5/24	1523	S	0	-		30.0	34.55						
0,00	1000	В	0	_	_	29.2	34.41						
6/14	0835	S	0	_	_	29.0	36.38						
7/20	1733	S	0	_	_	30.1	33.39						
7/26	1540	S	P	949	-	33.3	33.89						
8/10	1703	S	0	_	_	33.1	33.89						
8/23	1552	S	0	_	_	33.0	32.50						
8/30	0800	S	0	_	-	29.0	30.86						
9/28	1330	S	0	_	-	30.3	27.18						
10/5	1605	S	0	_	-	29.8	30.66						
11/2	1240	S	0	-	_	25.5	32.32						
11/15	1540	S	0	-	_	23.4	30.83						
11/29	1520	S	0	_	_	18.3	31.56						
12/8	0740	S	0	_	_	19.6	31.22						
12/28	1615	S	0		_	18.6	30.55						
1956													
1/10	1410	S	0	-	_	13.4	34.56						
2/1	1250	S	0	100	-	22.2	32.62						
3/7	1715	S	0	_	***	23.7	33.53						
4/11	1645	S	0	***	ges	18.9	35.42						
5/10	1020	S	0	-	-	26.0	32.23						
6/11	1530	S	0	-	-	27.5	36.31						
7/17	1128	S	0	-	-	30.5	36.70						
	STATIC	N A	17	Dep	th of	13 feet	27°	39.71	N 8	32° 40.	61 W	_	
1955													
7/20	1750	S	0	_	-	30.1	-	0.06					
8/10	1715	S	0	-	-	33.0	33.01	0.10					
8/23	1608	S	0	-	-	33.6	32.77	0.09					
9/28	1440	S	0	_	-	30.3	26.91	0.04	19.2		1.8	1.2	2.0
10/5	1620	S	0	-	-	30.1	28.95	0.00	•	18.3			
11/2	1250	S	0	-	_	23.1	30.19	0.04	-	-	940	13.5	3.8
11/15	1550	S	0	-	-	23.0	31.35	0.10					
11/29	1530	S	0	-	8. 1	18.5	31.58	0.32					
12/8	0755	S	0	-	7.8	19.7	31.76	0.15	-	4.0	-	5.0	1.5
12/28	1630	S	0	-	8.0	18.5	31.69	0.07					
1956	1300	S	0		7.9	13.0	34.09	0.25					
2/1	1310	S	0		-	20.3	31.69	0.05	12.7	13.6			1.9
3/7	1700	S	0	-	8.1	24.0	33.33	0.05	9.3	9.7	_	-	2. 2
4/12	0935	S	0	_	7.9	18.0	35.78	0.02	0.4	4.9	_	4.2	1.3
	,,,,	_					,,			/		-1-	

		S							P	0 4	NO		
Date	Time	or	G. b		pН	°C	Sal.	Cu.	In.	Tot.	NO 2	Car.	Pro.
= /10		В		M.									
5/10	1315	S	0	-	8.0	26.5	33.34	0.02	~ 0	1.7	0.1		0.6
6/7	1640	S	0	010	8. 1	29.0	36.68	0.04	9.8	9.8	1.1	2.5	1. 1
6/26	1055	S	0	040	7.9	30.0	36.35	0.08		F 4	1 5		0.7
7/13	1110	S	0	-			35.58	0.07	-	5.4	1.5	2.1	0.7
7/30	1156	S	0	-	640	29.5	35.99	0.03					
8/27	1155	S	0	540	-	31.7	36.56	0.02					
9/4 9/10	0817	S	0	044		29.0	35.01	0.01	0 (15.0	1 5	2 2	0 5
9/10	1210 0930	S S	0	-	***	24 5	33.62	0.04	9.0	15.9	1.5	4.3	0.5
10/8	0850	S	0	-		26.5	35.42	0.02					
10/8	0917	S	0		-	26.0	34.23	0.36					
10/17	0940	S	0	948	qua	22.5	36.55	0.00					
10/25	1333	S	0	-	-	24.3	35.05	0.01		0 5	0.1	2 0	0.3
11/14	1225	S	0	•••	0 0	24.0	34.51	0.22	0.4	9.5			
12/3	0955	S	P	•	8.0	22. 4 16. 6	34.81 34.26	0.05	9.4	12.7	0.5	1.0	0.5
12/11	1752	S	0	040		20.5	34. 25	0.03	15 1		3.2	1 0	0.5
12/11	1528	S	0	-	-	22.5	34. 54	0.23	15, 1	•	3, 4	1.0	0.5
1957	1526	۵	U	-		44.5	34. 34	0.23					
1/10	1043	S	0	840	-	19.5	34.61	0.11	6.8		0.0	2.3	1.3
1/28	1112	S	0	-	-	20.5	34.08	0.39					
2/5	1650	S	0		-	849	34.74	0.06	4.7	4.9	0.3	1.7	1.0
2/26	0738	S	0	-		20.5	33.68	0.12					
3/28	0932	S	P	-	840	20,0	35.00	•	1.4	3.0	1.2	3.0	0.6
4/12	1138	S	0	140	-	23.5	32.48	0.13	10.1	10.8	1.9	0.3	0.9
4/22	1630	S	0	-	-	26.5	31.70	0.08					
5/7	0800	S	0		-	23.5	31.54	0.18					
5/27	0750	S	0	040	000	29.5	32.48	0.70					
6/3	0910	S	0	-		28.7	32.08	0.12					
6/11	0852	S	0	-	-	29.2	33.03	0.11					
6/17	0828	S	0	•	-	28.5	31.63	0.31					
6/19	1710	S	0	-	8.2	30.3	31.97	0.12	₩	8.0			
	STATIO	ON A	A 18	Der	oth of	64 feet	27°	35.81	N	83° 07	t W		
1955 6/29	0022	D	0		7 0	27 0	26 15	0 14					
1956	0923	В	0	-	7.9	27.8	36, 15	0.16					
3/15	1000	S	0	-	8.1	21.9	36.53	0.04	0.1	1.1	-	0.6	0.3
		В	0	-	8.1	21.2	36.55	0.00	0.2	1.0		0.2	0.6
5/10	1150	S	0	-	8.1	25.2	36.57	0.00	000	0.0	0.1		0.0
		В	0	-	8.2	25.1	36.62	0.00	0.1	1.2		0.8	0.0
6/12	0900	S	0		8.0	26.7	36.80	0.03	0.1	0.6	0.0	1.4	0.0
		В	0	-	8.0	26.6	36.68	0.03	-	0.2	0.1		0.0
7/16	1450	S	0	-	8.1	30.2	36.49	0.04	-	0.0	0.2	0.9	0.2
		В	0		8.2	29.4	37.00	0.05	0.0	0.1	0.2		0.2

		S							P	0	NO_3		
Date	Time	or	G. b		pН	°C	Sal.	Cu.	_		NO ₂	Car.	Pro.
		В	C.	M.					In.	Tot.	2		
9/13	0910	S	P	-	8.2	27.0	36.53	0.04	0.2	0.2	0.6	0.8	0.0
		В	0	-	8.3	28.0	36.51	0.02	***	0.0	2.4	0.2	0.0
11/15	1222	S	0	-	8.1	23.0	36.49	0.25	-	0.2	0.0	2.2	0.4
		В	0	-	8.1	22.8	36.53	0.02	-	0.1	1.8	0.3	0.1
12/12	1155	S	0	-	_	20.1	35.96	0.03	0.0	0.2	4.3	0.2	0.2
		В	0	-	_	20.1	36.14	0.11	0.2	0.4	0.3	2.1	0.7
1957													
1/9	1200	S	0	_	•	19.0	36.03	-	0.0	0.2	0.1	0.8	0.6
		В	0	848	-	19.0	36.03	-	0.3	0.3	0.9	0.7	0.3
2/6	0939	S	0	-	8.0	19.8	36.24	0.31	0.2	0.7	0.8	1.2	0.0
		В	0	800	8.0	19.2	35.88	0.36	0.2	0.8	0.4	1.3	0.5
	STATIC	N A	. 19	Der	oth of	52 feet	27° 3	35.51 N	1 8	3° 00'	w		
1954									_				
6/30	1232	S	P	_	_	30.6	35.68						
0,00		В	0	p48	***	29.3	36.00						
8/11	1300	S	0		_	30.8	35.50						
0/11	1500	В	0	_	_	30.0	35.52						
9/14	1510	S	0	_	_	29.0	35.77						
//	1310	В	0	_	_	28.9	35.90						
1955													
2/16	1050	S	0	-	-	14.6	35.41						
		В	0	-	_	14.6	35.44						
6/29	0901	S	0	-	7.9	28.9	36.15	0.11					
- /		В	0	-	8.0	28.8	36.11	0.18					
7/19	1203	S	0	-	7.9	30.3	36.24	0.04					
0.10		В	0		8. 1	29.4	36.33	0.14					
8/3	1507	S	0	-	-	31.1	36.31	0 = /					
0/10	1050	В	0	-	-	29.4	36.27	0.56					
9/13	1053	S	0	-	-	30.0	36. 18	- 12	-	0.2			
0/20	1050	B S	0	-	0.0	30.0	36.20	0.12	- 7	0.1	2 /	2 2	0 0
9/28	1050		0	-	8.0	29.4	36.33	0.20	0.7	1.0	2. 6	2.2	0.3
11/2	1115	В	0	-	8.0	29.8	36.24	0.02	0.6	0.6	p40	_	0.5
11/2	1115	S	0	-	8.3	23.8	36.20	0.07					
12/0	1005	В	0	-	8.3	24.0	36.24	0.20	0 5	0 5			1 2
12/8	1005	S	0	-	7.9	21.0	36.15	0.25		0.5	-	0 4	1.3
1956		В	0	-	8.0	21.3	-	0.09	-	0.0	910	0.4	1.3
2/1	1134	S	0	-	-	16.0	36.42	0.05	0.0	0.0	Pad	0.0	1.3
		В	0	-	-	16.5	36.44	0.07	0.0	0.0	-	0.8	0.3
3/15	1033	S	0	-	7.8	22.0	36.43	0.10	-	1.0	-	0.5	0.5
		В	0	-	7.9	22.2	36.43	0.07	0.9	1.1	000	0.8	1.0
5/10	1224	S	0	-	8.1	25.5	36.60	0.00	-	0.0	0.1	0.3	
		В	0	-	8.2	25.3	36.66	0.43	0.1	0.2	***	0.8	0.0

Date	Time	S	G. 1	reve	pН	°C	Sal.	Cu.	P	04	NO =	Car.	Pro.
		В	C.	M.	F		504.0		In.	Tot.	2		
6/12	0830	S	0	-	8.1	27. 1	36.81	0.01	0.1	2.1	0.0	1.3	0.0
		В	0	-	8.2	27.0	36.68	0.00	0.3	0.4	0.6	0.5	0.0
7/16	1518	S	0	99	8.2	30.0	37.05	0.11	**	0.0	0.1	1.1	0.0
- 4		В	0	•••	8.2	29.5	37.05	0.07	-	0.1	0.0	1.6	0.2
9/13	0845	S	0	-	8.2	27.5	36.97	0.01	-	0.1	0.1	0.7	0.1
		В	0	-	8.2	27.5	36.94	0.01	-	0.1	-	-	0.1
11/15	1244	S	0	-	8. 1	22.5	36.52	0.06	-	0.3	0.2	0.7	0.2
		В	0	040	8.2	22.6	36.28	0.03	-	0.1	0.2	0.9	0.2
12/12	1127	S	0	-	•	19.8	36.08	0.06	-	0.1	0.3	1.6	0.8
1957		В	0	-	-	19.7	36.07	0.03	010	0.2	0.5	1.9	0.5
1/9	1218	S	0	-	-	18.9	36.03	0.38	0.2	0.3	0.2	2.9	0.3
		В	0	-	₩	18.9	35.92	0.21	0.0	0.2	0.6	2.4	0.8
2/6	0914	S	0	-	8.1	20.3	35.91	0.34	0.4	1.3	0.5	1.0	1.4
		В	0	_	8.1	19.7	-	0.19	0.6	0.6	0.4	1.0	0.5
	STATIO	ON A	20	Dent	h of	34 feet	27° 3	61 N	8	32° 51.	7 t W		
1955		211 1.		Depe		711000	21 3	- 14	2	55 51.			
6/28	1642	S	0	₩	8.0	30.5	36.13	0.66					
		В	0	-	7.9	30.0	36.13	0.07					
7/19	1618	S	0	-	7.8	31.1	36.29	0.09					
		В	0	-	7.8	30.0	36.35	0.00					
8/3	1103	S	0	***	-	30.0	36.15	0.56					
		В	0	-	e40	29.4	36.24	0.43					
9/13	1400	S	0	-	-	•	35.37	0.12	-	0.2			
		В	0	-	-	-	35.66	848	•	0.3			
9/28	1342	S	0	-	8.1	29.9	34.49	0.06	2.2	2.8	1.5	0.5	0.9
		В	0	-	8.0	30.1	35.34	0.01	1.2	1.8	1.5	0.6	0.5
11/2	1434	S	0	-	7.8	23.1	36.15	0.12	2. 1	2.2	1.5	7.4	2.3
		В	0	-	7.8	23.0	35.53	0.02	800	-	-	5.5	1.9
12/7	1603	S	0	949	8.0	19.5	34.48	0.25					
1956		В	0	•	8.0	19.1	35.61	0.07	0.6	0.8	•••	5.9	1.9
2/1	1500	S	0	-	-	18.0	34.91	0.06	2.5	3.3	-	1.0	0.8
		В	0	₩	-	15.4	35.66	0.04	0.1	0.4	-	3.6	
3/14	1554	S	0	-	8.0	22.5	36.26	0.00	0.6	0.8	-	1.5	0.6
		В	0	-	8. 1	22.1	36.19	0.01	-	0.5	cut	-	0.5
5/10	1326	S	0	200	8.1	26.6	37.00	0.42		1.6	0.2	2.1	0.0
		В	0	-	8.2	26.3	36.56	0.00		0.8	0.0	0.9	0.1
6/12	0753	S	0	-	8.2	27.6	36.96	0.04		0.5	0.2	1.8	0.0
		В	0	•	8.2	27.5	36.85	0.03		0.6	0.6	0.8	0.0
7/16	1553	S	0	-	8.2	30.6	36.99	0.07		0.7	0.2	1.9	0.4
		В	0	040	8.1	29.6	37.08	0.08	-	0.1	0.4	1.8	0.3

STATION A 20 (Cont^td)

		S							P	04	NO -		
Date	Time	or	G. b	reve	pН	°C	Sal.	Cu.			NO	Car.	Pro.
		В	C.	M.					In.	Tot.	2		
9/11	1138	S	0	98	8.2	27.3	37.21	0.42	-	1.1	4.3	1.0	0.4
		В	0	***	8.3	27.4	37.22	0.05	-	0.6	1.8	1.1	0.3
10/30	1516	S	0	-	8.2	23.6	36.59	-	0.1	0.2	0.1	0.5	0.0
		В	0	-	8.2	23.8	36.69	0.01	0.2	0.2	0.5	0.8	0.0
11/15	1315	S	0	**	8.2	21.9	35.46	0.17	-	0.5	1.1	1.2	0.5
		В	0		8.2	21.9	35.68	0.00	0.3	0.3	0.1	0.5	0.5
12/13	0829	S	P	448	~	18.9	35.45	0.02	**	0.3	***	1.3	0.8
		В	P	64		19.0	35.45	0.00	0.8	1.2	0.5	1.4	0.7
1957 1/8	1522	S	0	98	_	18.6	36.11	0.03	64	0.5			
1/0	1566	В	0		••	18.2	35.94	0.00	0.1	0.5	0.0	1.1	2.1
2/5	1528	S	0	_	8.0	22.5	35.52	0.24	0.3	0.5	0.1	0.3	0.1
2/3	1320	В	0	949	8.1	19.4	36.24	0.52	0.2	1.2	0.4	2.7	1.0
6/18	1117	S	0	98	8.0	29.2	35.48	0.05	-	0.4			
0/10	1111	В	0		8.0	29.2	35.68	0.22	-	0.4			
	COL A COL										5.71 W		
1055	STATI	ON A	21	De	ptn or	10 feet	41 3	4.5' N		04 4	5. 1. W		
1955 4/28	1027	S	0	**	-	25.2	35.49						
1956		~	-										
1/17	1350	S	0	nell .	and .	15.0	34.86						
2/14	1050	S	0	**		18.8	34.48						
4/18	1320	S	0	-	**	21.8	35.74						
5/10	1508	S	0	-	-	29.9	36.22						
		В	0	-	-	29.9	36.32						
8/13	1010	S	0	-	-	30.5	36.88						
8/27	1225	S	0	-	-	31.0	36.90						
9/4	0855	S	0	-	-	29.5	36.59						
10/17	1203	S	0	•	-	24.5	34.50						
11/7	1034	S	0	**	***	22.5	35.57						
11/15	1102	S	P	-	00	21.0	35.71						
11/19	1024	S	P	•	***	21.5	35.37						
12/3	0959	S	0	•	**	17.0	35.03						
12/20	1537	S	0	-	**	21.5	34.90						
1957		_					24 70						
1/9	1253	S	0	-	010	19.0	34.78						
1/15	0938	S	0	**	64	19.3	35.25						
2/5	0907	S	0	-	940	22.5	35.28						
2/11	0858	S	0	94	-	22.5	35.23						
3/28	1424	S	0	•	-	22.5	34.99						
5/27	1008	S	0		949	30.0	34.58						
6/11	0933	S	0	-	••	29.2	34.10						
8/12	0909	S	0	•	**	29.0							

STATION A 2	2 Depth of	56 feet	27° 33.2 ^t N	83° 02.2' W
-------------	------------	---------	-------------------------	-------------

					1									
			S							F	0,	NO -		
D	ate	Time	or	G. 1	breve	рΗ	°C	Sal.	Cu.		4	3	Car.	Pro
			В	C.		_				In.	Tot.	NO 2	oar.	1 10
195	55													
2	/17	0913	S	0	_	-	14.9	33.64						
			В	0	-	-	14.4	34.92						
7,	/19	1144	S	0	-	-	29.4	36.33						
			В	0	_	**	30.0	36.15						
9	/13	1425	S	0	***	-	30.4	35.08						
,			В	0	••	-	30.2	35.53						
9	/28	1402	S	0	_	_	29.8	34.85						
, ,		1 10 11	В	0	_	ω	30.0	35.34						
11,	/2	1456	S	0	_		22.5	33.86						
11/		1430	В	0	_	-	22.7	34.76						
195	6				-	-								
6,	/12	0932	S	0		040	26.8	36.83						
			В	0	***	***	26.6	36.82						
7 /	/16	1425	S	0	***	***	30.2	37.21						
			В	0	•	-	29.4	37.24						
9/	/13	0932	S	0	-	-	28.0	36.47						
			В	0	***	-	28.0	36.44						
		STATI		23	Dont	h of	27 feet		3.3 ^t N	r	020 41	8.61 W		
195	6	DIAIL	OIV A		Dept	11 01	Li leet	21	75.5 1		04 40	3. O. W		
2/		1519	S	0	-	-	18.2	35.29						
			В	0	••	•••	16.1	35.47						
5	/10	1535	S	0		-	26.4	36.38						
,			В	0	_	_	26.5	36.74						
10,	/30	1458	S	0	_		23.7	36.27						
10 /	30	1130	В	0	_	-	23.4	36.36						
6	/18	1153	S	0			29.2	35.58						
0 /	/ 10	1155	В	0		•••	29.0							
								35.55						
	_	STATI	ON A	24	Dept	h of	10 feet	27°3	1.7' N		82° 4	2.2 W		
195	/28	1430	c	0			20.0	20 05						
71	120	1430	S	0	-	-	29.9	30.95						
	10	1520	В	0	-	-	29.9	31.04						
11,	12	1520	S	0	***		21.4	32. 18						
195	66		В	0	•	••	22.0	32.43						
	/17	1405	S	0	**	-	14.0	33.36						
2,	/14	1056	S	0	***	-	18.0	33.85						
	/29	1058	S	0	-	-	16.3	35.27						
	/14	0932	S	0	•	ena	24.5	35.35						
	/26	1215	S	0	•••	***	17.8	34.17						
	/3	1027	S	0		-	21.9	35.62						
	/18	1325	S	0	-	-	22.0	36.49						
	/25	1010	S	0	-	_	23.0	35.04						
	/7	1508	S	0	_	_	28.6	35.80						
0 /	, ,	1500	В	0	-		28.6	35.83						
							-							

			S							P	04	NO -		
Dat	e	Time	or	G. b	-	pН	°C	Sal.	Cu.			NO ₂	Car.	Pro.
			В	C.	M.					In.	Tot.	2		
6/2	6	1333	S	0	-	-	30.1	36.77						
7/1		1136	S	0	-	-	30.5	36.78						
7/3		1305	S	0	-	-	29.0	35.62						
8/6		0850	S	0	-	•••	30.5	35.69						
8/1		1017	S	0	-	-	29.5	36.23						
8/2		1232	S	0	-	-	31.2	35.32						
9/4		0858	S	0	-	-	28.7	35.54						
9/1		0918	S	0	-	_	25.0	33.30						
9/2		0958	S	0	_	-	26.8	34.82						
10/2		1121	S	0	-	-	27.2	33.91						
10/8		0913	S	0	-	-	26.0	33.34						
10/1		1211	S	0	_	-	23.5	35.77						
10/2		0905	S	0	-	-	23.8	34.50						
11/1		1025	S	0	-	-	23.0	22 05						
11/7		1040	S	0	_	-	22.5	33,95						
11/1		1108 1030	S S	0	-	-	21.0	34.08						
11/1		0800	S	0	-	-	21.4 16.8	34.40						
12/3		1005	S	0	_	-	16.0	34.71 34.48						
12/3		1550	S	0	-	-	22.5	34.63						
1957	.0	1550	3	U	-		22.5	24.03						
1/9		1312	S	0	_	-	19.8	34.66						
1/2		1035	S	0	•		17.0	33.60						
1/2		1145	S	0	-	_	22.0	34.13						
2/1		0905	S	0	-	-	23.2	34.66						
2/2		0944	S	0	-	_	21.0	34.42						
3/7		1335	S	0	_	010	21.5	34.17						
3/1		0956	S	0	-	-	17.5	34.02						
3/1		1300	S	0	-	-	22.0	34.07						
3/2	8	1418	S	0	-	-	22.2	34.31						
4/8		1032	S	0	-	-	24.5	33.50						
4/1		0925	S	0	-	-	21.2	31.47						
4/2	3	0922	S	0	-	-	25.0	33.30						
5/3		0827	S	0	-	-	26.5	34.17						
5/7		1117	S	0	-	010	24.5	31.37						
5/1		1400	S	0	-	-	29.5	33.16						
5/2		0907	S	0	-	-	29.7	33.79						
5/2		1013	S	0	-	-	30.0	34.37						
6/3		0926	S	0	-	-	29.2	32.77						
6/1		0940	S	0	-	-	29.0	33.73						
6/1	7	0905	S	0	-	-	29.0	32.32						

	STATI	ON A	. 25	Dep	oth of	4 feet	27°	301 N		82°	34.4' W	I	
Date	Time	s or B	G. b	reve M.	рН	°C	Sal.	Cu.		PO ₄	NO - 3 NO	Car.	Pro
1954	1255					25 1	2/ /=		In.	Tot.			
3/30	1355	S	0	000	-	25.4	26.67						
1955 5/24	1610	S	0			20.7	22 (7						
6/14	0928	S	0	-		29.7 28.0	32.67						
6/29	1010	S	0		-	30.5	32.78						
7/11	1404	S	0	-	-	30.9	29.92						
7/20	1818	S	0	-	=	29.4	29.61						
7/26	1615	S	0	_	_	30.6	23.68						
8/10	1743	S	0	-	-	33.0	10.39						
8/23	1632	S	0	-		34.5	11.35						
8/30	0841	S	0	***	_	29.0	19.79						
9/28	1420	S	0	•	-	31.1	22.54						
10/5	1650	S	0	-	-	29.0	26.58	0.03	-	_	7.1		
11/2	1337	S	0	-	-	26.7	25.93						
11/15	1620	S	0	-	-	24.5	26.54	0.15					
11/29	1605	S	0	-	7.8	20.0	28.30	0.32					
12/8	0845	S	0	-	7.6	20.3	28.96	0.14	5.7	6.4	**	1.2	3.0
12/28	1825	S	0	-	7.6	19.0	28.49	0.05					
1956													
1/10	1325	S	0	-	7.8	13.6	29.36	0.11					
2/1	1400	S	0	**	-	21.5	28.53	0.05		8.1	-	1.4	
3/7	1625	S	0	-	8.2	24.0	29.87	0.05		0.5			
4/12	1010	S	0	-	7.9	18.2	32.72		8.3	8.7	-	8.3	
5/10	1345	S	0	-	8.0	27.2	34.07			15.0	0.0	-	0.9
6/26	1035	S	0	-	7.9	30.3	33.15	0.05		0 1	0 0		0 0
7/13	1200 1145	S	0	_	-	20 5	30.81		8.3	9.7	0.3	1.9	0.8
7/30 8/27	1243	S S	0	-	-	29.5	31.59	0.01					
9/4	0802	S	0	***	_	32.0 28.5	29.43 24.47	0.03					
9/10	1145	S	0	-	-	20.5	21.95			13.0		1.8	
9/24	0947	S	0	_	_	27.0	30.97	0.09	7 • 7	15.0		1.0	
10/8	0905	S	0	_		26.5	27.45	0.05					
10/17	0900	S	0			22.7	24.77	0.03					
10/25	1023	S	0	_	-	24.7	24.30	0.15					
10/30	1316	S	0	_	-	24.2	27.80			8.9	0.4	0.7	0.8
11/14	1150	S	0	-	8.1	20.3	29.86			11.2	4.9	1.2	1.4
12/3	1013	S	0	-	_	15.1	33.11	0.02					
12/11	1709	S	0	-	-	20.7	31.14	0.09	-	11.8	2.3	1.8	0.9
12/20	1545	S	0	-	-	24.0	33.83	0.11					
1957	1010	C	0			10 2	31 5	0.95	Q 1	0 2	0.8	3.4	1.4
1/10 1/28	1018 1 1 00	S S	0	-	-	19.2 21.5	31.5 30.27	0.95	0. 1	8.2	0.0	J. 4	1.4
2/5	1635	S	0	040	-	24.2	32.11	0.00	_	6.7	0.3	1.9	1.2
4/3	1000	D	0	-	-	- E - C	20,11	0.00		0.1	0.3	- 0 /	1.0

Data	S C		h			G-1 C.	Cu.	P	0_4	NO ₃ -		D	
Date	Time	or B	C.	breve M.	pН	°C	Sal.	Çu.	In.	Tot.	NO	Car.	Pro.
2/26	0725	S	0	-		20.5	30.30	0.08					
3/28	0915	S	0	_		21.0	24.37	0.00	5.7	6.8	2.5	2.6	1.7
4/12	1120	S	0	-	010	24.5	24.46	0.17	8.2	8.4	2.4	0.9	1.7
4/22	1620	S	0	-	_	26.5	23.38	0.08					
5/7	0748	S	0	-	-	24.2	-	0.19					
5/27	0740	S	0	_		29.5	26.10	0.18					
6/3	0920	S	0	-	-	28.8	29.60	0.06					
6/11	0840	S	0		-	29.0	16.90	0.08					
6/19	1730	S	0	_	7.8	33.6	21.65	0.14	-	10.8			
	STATIC	ON A	26	Dept	h of	54 feet	27° 2	7.5' N		82° 5	81 W		
1954													
6/30	1152	S	P	-	-	30.1	35.55						
		В	0	-	949	29.4	35.57						
9/14	1555	S	-	125	•	29.1	35.71						
.055		В	0	-	-	28.8	36.08						
1955 6/29	1006	S	P	•		29.1	36.29						
0,2,	1000	В	0	_		28.9	36.24						
7/19	1105	S	0	-	_	29.4	36. 15						
., -,	2200	В	0	_		30.0	36.20						
8/3	1545	S	0			28.9	36.51						
0,0	2010	В	0	-		30.0	36.49						
9/13	1011	S	0	-	_	29.7	36.27						
,,		В	0	-	•	30.0	36.26						
9/28	1012	S	0		-	29.8	36.15						
		В	0	-	-	29.9	36.15						
11/2	1040	S	0	-	_	23.0	35.81						
		В	0	-	-	24.3	35.86						
1956	1052		0										
2/1	1053	S B	0	-	-	17.2	36.56						
3/15	1122	S	0	-	-	17.5	36.13 34.52						
3/13	1144	B	0	•••	-	22.5 22.0	34.52						
5/10	1058	S	0	949	800	25.4	36.52						
3/10	1030	В	0	949	-	25. 3	36.57						
6/12	1017	S	0	***	-	27.2	36.81						
0/12	1017	B	0	-	-	27.0	36.81						
7/16	1350	S	0	***	-	30.5	37.08						
,,10	1550	В	0	_	-	29.5	37.08						
9/13	1001	S	0	-	_	28.0	36.69						
// 13	1001	В	0	-	_	28.0	36.60						
12/12	1045	S	0	_	_	20.0	35.85						
12/12	1043	В	0	_	_	20.3	35.90						
		-	-	_		2000	220/0						

													4
		S							Р	0	NO -		
Date	Time	or	G. I	oreve	pН,	°C	Sal.	Cu.	_	4	2	Can	77
		В	C.	M.	L.**)		No Chill 8	Ju.	In.	Tot.	NO ₂	Car.	Pro.
1957				2728					TILE	101.			
1/9	1253	S	0	_		19.3	35,88						
1//	1233	В	P	_	-	19.3							
2/6	1033	S	0	-	-		36.07						
2/0	1033	B		-	-	20.1	35.89						
		Б	0	-	-	19.7	35.98						
	STATI	ON A	27	Dept	h of 3	33 feet	27° 2	8' N		82° 4	8 t W		
1954													
6/30	1607	S	0		_	31.2	34.97						
		В	P	-	_	30.3	35.55						
8/11	0903	S	0	-		30.2	34.83						
·		В	0	440	**	29.8	35.62						
9/14	1110	S	0	010	-	28.9	34.81						
// ~ ~		В	0	-	_	28.9	34.83						
1955		10	,	_		2007	51,05						
2/17	0944	S	0	-	-	15.1	34.63						
		В	0	•	-	14.7	35.10						
6/28	1558	S	0	**	•••	30.0	36.16						
		В	0	_	**	29.8	36.13						
7/20	1304	S	0		-	30.1	36.36						
•		В	0	_	_	30.3	36.36						
9/13	1448	S	0	***	_	31.2	36.15						
,,,,,	2 0	В	0	ma	_	30.7	36.26						
12/7	1517	S	0	**	8.2	19.7	35.30	0.05	0 8	1.1		0.9	
12/1	1311	В	0		8. 2	19.5	35.66	0.22		0.3		-	3.1
1956		D	U	-	0. 4	17.5	33,00	0.42	0.1	0.3	***	-	5. 1
5/10	1600	S	0	-	8.2	26.1	36.60	0.42	0, 2	**	0.0	-	0.0
		В	0	_	8.2	25.8	36.89	0.00	0.0	0.0	0.0	0.6	0.8
7/17	0848	S	0	***	8.2	29.5	37.11	0.08	-	0.5	0.4	1.2	0.0
		В	0	-	8.1	29.5	37.12	0.06	**	0.0	0.2	1.2	0.5
9/11	1055	S	0		8.3	27.3	36.71	0.04		0.6	1.5	0.7	0.0
		В	0	-	8.3	27.5	36.76	0.00		0.3	0.2	1.0	0.0
10/30	1434	S	0	-	8.0	23.8	36.42	0.12		0.8	0.3	1.3	0.0
_ , , , ,		В	0	-		23.3				0.3	0.7		
11/15	1356	S	0			22.8		0.16			0.2	1.7	0.3
11/13	1000	В	0		8.3	22.7		0.34			0.1	- ·	0.5
12/13	0907	S	-	0.3		19.0		0.26		0.9	0.6	0.2	0.3
14/13	0701	B	0					0.10			0.0	0.2	
1957		D	U	-	**	19.0	35.55	0.10	649	0.9	0.0	0.5	0.3
2/5	1416	S	0	•	8.0	22.5	35.80	0.62	0.2	0.3	0.1	0.2	0.1
		В	0	-	8.1			0.32		0.3			0.2
	STATI					9 feet	27°2				1.4' W		
1954				A					-			-	
	1435	S	0	-	**	26.2	33.90						
5/4	1030	S	P	-	_	27.2							
8/17	1700	S	0	940	-	31.7	31.96						

		S							F	0,	NO -		
Date	Time	or	G. b	reve	рН	°C	Sal.	Cu.		4	NO.	Car.	Pro.
		В	C.	M.					In.	Tot.	4		
10/5	1352	S	0	0-0	-	29.1	32.97						
10/27	1415	S	0	-	-	24.2	30.19						
11/6	1240	S	0	-	-	17.9	30.50						
1955			_										
5/5	1540	S	0	-	-	27.7	34.65						
5/11	1620	S	0	•••	-	28.7	34.65						
5/24	1640	S	0	-	-	30.6	36.64						
6/1	1103	S	0	-	_	29.2	36.27						
6/14	1035	S	0	••	0-0	28.9	2/ 02						
6/29	1200	S	0	6-0	•••	31.4	36.02						
7/11	1516	S	0	_	-	30.0	35.88						
7/20	1958	S	0	-	•	28.8	34.65						
7/26	1715	S	0	-	-	31.7	35.95						
8/3	0946	S B	0	-	-	30.0 29.7	35.34 35.75						
0/10	1820	S	0	_	-	32.1	32.86						
8/10 8/16	1906	S	0	_	-	28.9	34.04						
8/23	1713	S	0	_	-	32.5	34.99						
8/30	0925	S	0	-	_	29.8	35.46						
9/8	1337	S	0	_	_	31.5	33.28						
9/20	1710	S	0	_	_	30.0	33.24						
9/28	1530	S	0	_	_	30.5	34.99						
10/5	1820	S	0	-	**	30.0	32.70						
11/2	1455	S	0	-	de .	23.7	34.12						
11/15	1710	S	0	-	_	24.1	32.81						
11/29	1651	S	0	-		18.6	33.75						
12/28	1635	S	0	-		18.3	34.70						
1956													
1/10	1228	S	0	-	-	13.0	33.31						
2/1	1605	S	0	-	-	20.5	34.59						
3/7	1525	S	0	-	•	25.4	36.58						
4/11	1545	S	0	-	-	19.5	36.07						
4/25		S	0	•	-	22.5	36.39						
5/10	0930	S	0	-	-	26.0	37.15						
6/11	1650	S	0	-		27.7	37.01						
7/17	1146	S	0	-	-	31.1	36.91						
1954	STATI	ON A	1 29	Dept	h of	3 feet	27° 27	7.31 N	1	82° 4	1.81 W	_	
5/4	1050	S	P	-	_	27.7	34.61						
8/17	1645	S	0	_	_	31.4	34.23						
10/5	1335	S	P	-	_	29.4	3 3.57						
10/27	1355	S	0	-	_	24.8							
12/22	1710	S	0	_	•	16.0	33.98						
,	2.20						, .						

		S							P	0	NO -		
Date	Time	or	G. k	reve	pН	°C	Sal.	Cu.		4	3	Car.	Pro
		В	C.	M.					In.	Tot.	NO ₂		
1955													
5/5	1553	S	0	010	-	27,2	35.62						
5/11	1641	S	0		_	26.9	36.08						
5/24	1650	S	0	-	-	30.8	36.53						
6/1	1043	S	0	-	-	29.8	36.61						
6/14	1015	S	0		-	28.5	36.52						
6/29	1140	S	0	-	-	31.8	36.29						
7/11	1440	S	0	-	-	30.1	35.97						
7/20	1941	S	0		_	29.2	35.77						
7/26	1705	S	0	-	-	31.7	36.09						
8/10	1826	S	0	-	-	33.0	36.31						
8/16	1835	S	0	-	-	30.0	36.11						
8/23	1706	S	0	***	-	32.6	35.84						
8/30	0908	S	0	-	-	29.8							
9/8	1320	S	0	_	•••	30.7	34.76						
9/28	1510	S	0		-	30.8	36.11						
10/5	1800	S	0	-	-	29.1	34.67						
11/2	1440	S	0	-	-	23.8	35.07						
11/15	1650	S	0	-	-	24.4	34.92						
11/29	1633	S	0	-	-	20.0	35.07						
12/28	1800	S	0	_	_	18.0	35.44						
1956													
1/10	1210	S	0	-	-	13.0	34.54						
2/1	1545	S	0	geth		18.5	-/						
3/7	1510	S	0	***	-	24.1	36. 19						
4/11	1535	S	0	com	-	20.2	36.33						
5/10	0910	S	0		-	25.7	36.96						
6/11	1630	S	0	••	-	28.0	37.06						
1054	STATI	ON	A 30	Dept	h of	14 feet	27° 2	6.5' N	<u> </u>	82°	41.3° W	_	
1954 8/10	1720	s	0	_	_	31.8	34.38						
9/21	1615	S	P			30.2	31.98						
1955	1015	J	_	_	_	30.2	31.70						
4/5	0945	S	0	-	849	20.0	34.20						
1956	- 4 - 4	_					0 = 0 1						
1/17	1414	S	0	-	-	13.0	35.04						
2/14	1105	S	0	-	-	18.0	35.76						
2/29	1107	S	0	-	-	19.0	36.11						
3/14	0942	S	0		-	23.5	36.07						
3/26	1225	S	0		-	18.2	36.02						
4/3	1033	S	0		-	20.2	36.14						
4/18	1335	S	0	**	-	21.9	36.21						
4/25	1070	S	0	•••	•	22.0	35.97						

		S							P	0	NO ₃ -		
Date	Time	or	G. br	eve	рΗ	°C	Sal.	Cu.		4	NO 3	Car.	Pro.
		В	C.	M.	_				In.	Tot.	2		
6/7	1430	S	0		-	28.3	36.47						
		В	0	-	-	28.1	36.91						
6/26	1340	S	0	-	***	30.0	37.01						
7/17	1152	S	0	**	***	30.5	37.20						
7/30	1313	S	0		-	29.2	35.88						
8/6	0958	S	0	-	-	31.0	37.21						
8/13	1025	S	0	-	**	30.5	37.11						
8/27	1253	S	0	-	***	31.0	37.30						
9/4	0906	S	0	-	-	29.5	37.24						
9/12	0927	S	0	010	000	24.5	35.73						
9/24	1005	S	0	-	-	27.0	36.92						
10/2	1128	S	0	-	-	27.2	36.53						
10/8	0924	S	0	era	010	26.5	35.76						
10/17	1220	S	P	-	-	23.5	37.07						
10/25	0858	S	P	000	**	24.5	36.09						
11/1	1035	S	0	•	-	23.0	36.36						
11/7	1049	S	0	-	-	22.5	35.86						
11/15	1115	S	0	-	•	20.6	35.23						
11/19	1037	S	0	**	00	21.7	35.54						
11/27	0810	S	0	-	-	17.0	34.98						
12/3	1020	S	0	-	**	17.0	35.03						
12/11	1220	S	P	-	-	19.7	35.34						
12/20	1556	S	0	-	-	21.5	35.55						
1957													
1/9	1319	S	0	-	-	18.7	35.74						
1/15	0952	S	0	-	•	19.5	35.60						
1/22	1042	S	0	-	•	17.8	34.60						
1/28	1158	S	0	-	-	19.5	35.32						
2/5	0920	S	0	-	-	23.2	35.71						
2/11	0912	S	0	-	***	23.3	35.52						
2/26	0951	S	0	-	-	20.5	36.15						
3/7	1335	S	0	-	-	20.5	35.19						
3/12	1004	S	P	-	-	18.3	35.03						
3/18	1308	S	P	**	••	20.0							
3/28	1410	S	P	**	-		35.04						
4/8	1044	S	0	-	-	24.5							
4/17	0933	S	0	-	-	22.2	35.38						
4/23	0920	S	0	-	**	24.5	35.05						
5/3	0834	S	0	-		26.0	34.73						
5/7	1125	S	0	-		24.8	34.82						
5/14	1406	S	0	-	-	27.5	34.66						
5/21	0914	S	0	-	-	29.5	35.17						
5/27	1023	S	0	-	-	30.0	35.11						

		S							P	O_4	NO_3		
Date	Time	or	G. 1	oreve	рН	°C	Sal.	Cu.		4	3	Car.	Pro.
		В	C.	M.					In.	Tot.	NO_2		
6/3	0933	S	0	-	_	29.0	35.34						
6/4	1235	S	0	040	-	31.9	35.26						
6/11	0947	S	0	**	_	29.2	35.02						
6/17	0913	S	P	_	-	28.5	35.13						
6/25	1153	S	0	_	_	_	34.51						
	STATI	ON A	31	Dep	th of	47 feet		24¹ N		82°	55' W		
1955													
6/29	1059	S	0	-	8.0	29.5	36.24	0.17					
		В	0	~	8.1	29.0	36.11	0.27					
7/19	1045	S	0	**	8.1	29.4	36.33	0.19					
		В	0	-	8.2	29.4	36.33	0.17					
9/13	0949	S	0		_	29.4	36.33	0.16	-	0.2			
		В	0	-	-	29.4	36.33	0.05	-	0.1			
11/2	1010	S	0	-	8.2	23.3	36.06	0.12					
		В	0	-	8.2	23.8	35.97	0.09					
12/8	1120	S	P	-	8.0	21.1	36.06	0.21	_	0.0	_	0.9	
/		В	0	_	8.1	21.3	36.14	0.12	-	0.0	-	0.4	2.3
1956 2/1	1029	S	0			17.4	36.48	0.06	0.0	_		0.9	
4/1	1029			-	-			0.03	0.0	0.1	•	8.5	1.5
2/15	1140	B S	0	-	7.8	17.6	36.48	0.06			-		0.6
3/15	1140			_		22.5	34.35		0.5	0.5	•••	0.8	
5/30	1025	В	0	-	7.8	22.4	36.62	0.00	0.2	0.3	-	1.1	2.7
5/10	1035	S	0	-	8.2	25.5	36.54	0.45	040	0.1	0.1	1.5	0.0
6/12	1050	В	0	-	8. 2	25.5	36.69	0.00	0 1	0.0	0.2	1.7	
6/12	1050	S	0	-	8.1	27.5	36.87	0.10	0.1	0.3	0.6	1.5 0.6	0.1
0/1/	1220	В	0	-	8.1	27.4	36.88	0.01	0.0	0.3	0.0		0.0
8/16	1330	S	0	-	8.2	30.2	37.03	0.05	0 5	0.0	0.2	0.7	0.0
0/12	1021	В	0	-	8.2	29.5	36.90	0.07	0.5	0.5	0.1	1.2	0.2
9/13	1031	S	P	-	8.2	27.8	37.36	0.01	0.3	2.3	0.8	1.2	0.0
/	1441	В	0		8.2	27.7	27.31	0.00	0.5	1.3	0.4	0.9	0.4
11/15	1441	S	0	-	8.3	23.5	36.52	0.05	-	0.0	0.2	1.2	0.1
/	3005	В	0	046	8.2	22.7	36.61	0.06	~	0.1	0.1	1.2	0.1
12/12	1025	S	0	-	-	19.8	36.09	0.03		2.9	0.0	0.5	0.7
1957		В	0	_	-	20.0	36.12	0.06	-	0.1	1.2	0.5	0.3
1/9	1314	S	-	0.3	-	19.3	36.08	0.19	0.1	0.2	0.0	0.5	0.8
-17	1011	В	0	-	_	19.4	36.34		_	0.1	0.8	0.7	0.3
2/6	1054	S	P	_	8.0	20.4	35.78	-	0.2	0.6	0.6	0.8	0.1
2/0	2001	В	0	gen	8.1	19.7	36.08	0.13		0.7	0.9	1.6	0.6

	STATIC	ON A	32	Dept	h of	6 feet	27° 2	23.81 1	1	82°3	37.41 W		
		S								PO ₄	NO-		
Date	Time	or B	G. 1:	M.	pН	°C	Sal.	Cu.	In.	Tot.	NO ₂	Car.	Pro.
1955													
4/5	1020	S	0	800		21.5	35.16						
4/28		S	0	(mil		24.9	36.16						
8/3	0910	S	0		_	-	35.44						
-,-	. , -	В	0	-	_		35.62						
9/28	1521	S	0	-	-	30.5	33.87						
11/2	1613	S	0		gest	22.5	35.21						
1956		_											
1/17	1425	S	0			15.0	35.20						
4/25	1028	S	0	***	-	22.6	35.95						
10/25	0835	S	0	-	010	24.8	36.42						
	STATI			Dent	h of	6 feet	27 °	22.71	NI	82°	38.1' W	I	
1955	SIAII	ON A		Dept	11 01	0 leet	21	22.1			30.1		
3/1	1800	S	0	_	010	23.3	34.56						
5/5	1450	S	0	_	_	25.6	37.01						
5/11	1530	S	0	_		28.7	36.42						
5/25		S	0	one	_	29.2	37.38						
6/1	1204	S	0	_		28.5							
6/14		S	0	200	_	28.9							
6/29		S	0	**	_	31.0	37.00						
7/11	1607	S	0	***	_	30.0	36.69						
7/21	0835	S	0	-	(mil	27.7	35.68						
7/27		S	0	_	-	29.4	36.44						
8/11	0828	S	0	***	***	30.7	35.79						
8/16		S	0			30.6	36.26						
8/24		S	0	_	_	30.5	36.45						
8/30		S	0	•	OHE .	29.0	33.13						
9/8	1430	S	0	***	-	31.0	33.98						
9/28		S	0	_		31.5	33.44						
10/6	0840	S	0	•••	***	28.5	34.22						
11/1	1730	S	0	-	-	21.5	35.43						
11/16		S	0	000	_	23.4	35.35						
11/30		S	0	-		11.0	36.27						
12/29		S	0		_	18.0	34.47						
1956													
1/5	1210	S	0	-	-	15.0	35.83						
1/11	0930	S	0	-	840	11.5	35.32						
3 /0 =	-045	-01	^			3.2 5	24 00						

20.0 35.55

34.88

35.15

35.35

36.11

13.5

21.5

20.0

16.3

1/25

1/31

2/8

2/14

2/29

1245

1525

1135

1114

1114

0

0

0

S

S 0

S

S

S

Dat	e Time	S or		breve	T	T 0.0			F	04	NO-		
		В		. M.		-I °C	Sal.	Cu.			NO 2	Car.	Pro
3/7	1350	S		-		24.5	36.28		In.	Tot.	2		
3/1	4 0954	S		_	_	24.5							
3/2	6 1230	S	0	_	-	18.5							
4/3	1040	S	0	_	-	20.0							
4/1		S	0	_	-	19.1							
4/18	3 1340	S	0	_	_	22.0	37.01						
4/2	1030	S	0	0+0	_	23.0	37.17						
5/9	1840	S	0	_		26.0	37.76						
6/12		S	0	-	-	26.0	38.47						
6/26		S	0	-		31.3	38.51						
7/17		S	0	_		30.5	38.08						
7/30	1321	S	0		-	29.0	36.61						
8/6	0905	S	0	_	me	30.5	37.72						
8/13		S	0		_	24.5	36.53						
8/27	1300	S	0	-	_	31.5	37.32						
9/4	0915	S	0		-	27.6	36.85						
9/12	0936	S	0	-	-	24.0	36.95						
9/24	1017	S	-	0.2	_	26.5	37.33						
10/2	1135	S	P	PH	_	27.6	36.00						
10/8	0931	S	0	-	_	26.0	34.71						
10/17	1228	S	0	-	-	23.2	35.58						
10/25	1035	S	0	-	_	25.2	35.52						
11/1	1040	S	0	-	_	23.2	36.29						
11/7	1056	S	0	-	_	22.3	36.51						
11/15	1122	S	0	-	me	20.5	36.12						
11/19	1045	S	P	_	_	22.0	36.45						
11/26	1149	S	0	-	_	18.5	36. 12						
12/3	1026	S	0	-	-	16.5	35.92						
12/11	1228	S	0	_		21.0	36.26						
12/20	1604	S	0	-		24.0	36.10						
957	1005	_					30.10						
1/9	1325	S	0	od.	-	21.0	36.52						
1/15	0959	S	0	-	-	20.3	36.02						
1/22	1050	S	0	-		19.7	32.90						
1/28	1200	S	0		- ;	24.2	35.27						
2/5	0928	S	0			23.2	35.86						
2/11	0918	S	0	.		24.0	35.62						
2/26	0958	S	0			20.7	34.93						
3/7	1342	S	0			23.0	33.42						
3/12	1010	S	0			18.2	34.90						
3/18	1315	S	0			22.7	35.10						
3/28	1404	S	0			2.0							

		S							PO_{4}	NO-3		
Date	Time	or	G. b	reve	рН	°C	Sal.	Cu.	4		Car.	Pro
		В	C.	M.				In	. Tot.	NO ₂		
4/8	1050	S	0		-	25.2	34.37					
4/17	0940	S	P	-	•	21.0	34.75					
4/23	0936	S	0	-	***	24.4	34.42					
5/3	0840	S	0	-	•	26.3	33.73					
5/7	1130	S	0	-	-	24.5	34.08					
5/14	1413	S	0	010	•	29.8	34.07					
5/21	0920	S	0	-	-	29.5	34.62					
6/3	0940	S	0		-	28.5	34.46					
6/4	1225	S	0	-	-	30.1	34.55					
6/11	0954	S	0	-	-	30.0	33.08					
6/17	0920	S	0	-	-	27.0	33.90					
	STATIO	A NC	34	Dep	th of	9 feet	27° 2	1.31 N	82 •	34.5' V	V	
1954 2/5	1225	S	P	_	_	18.8	33.88					
7/3	0847	S	0	_	_	28.3	35.28					
.,,	0011	В	0	-	_	28.3	35.28					
9/28	1545	S	0	_	_	30.2	34.02					
9/30	1715	S	0	_	_	29.6	32.32					
11/2	1630	S	0	-	-	22.0	35.41					
1956												
4/25	1100	S	0	-	•	23.0	36.12					
1054	STATI	ON A	35	Dept	h of	15 feet	27° 19	7.7' N	82° 3	5.2' W	_	
1954 5/4	1130	S	P		_	28.1	34.45					
8/10	1652	S	P	_	_	31.3	33.64					
8/17	1810	S	0	-		31.4	34.56					
9/21	1700	S	0	-	000	29.9	34.14					
10/27	1745	S	-	1	-	23.7	J 1 1 1 1					
11/6	0955	S	0	_	_	19.3	34.00					
12/22	1635	S	0	_	_	16.0	33.48					
1955		_										
2/1	1940	S	0	-	-	15.7	34.60					
4/19	1805	S	0	-	-	25.5	35.91					
5/5	1440	S	0	-	***	26.0	35.88					
5/11	1515	S	0	-	-	26.0	36.11					
5/25	0940	S	0	-	-	29.2	36.42					
6/1	1226	S	0	-	-	29.0	36.59					
6/14	1145	S	0	-	-	29.3						
6/29	1345	S	0	-	-	31.0	36.29					
7/11	1630	S	0	-		30.5	36.58					
7/21	0906	S	0	-	-	29.3	35.90					
7/27	0904	S	0	**	_	29.4	35.88					
8/11	0840	S	0	-	000	30.5	35.23					

		S							F	PO ₄	NO-		
Date	Time	or		oreve	рН	°C	Sal.	Cu.		4	3	Car.	Pro.
		В	C.	M.					In.	Tot.	NO ₂		
8/16	1720	S	0	-	-	30.6	35.35						
8/24	0912	S	0	-	_	30.8	35.86						
8/30	1055	S	0	-	-	30.5	35.57						
9/8	1455	S	0		-	31.0	35.48						
9/20	1752	S	0	-	-	29.8	34.79						
9/28	1630	S	0		-	30.1	34.31						
10/6	0855	S	0	-	-	28.8	34.83						
11/1	1715	S	0	-	-	23.0	35.14						
11/16	0830	S	0	-	-	22.3	34.99						
11/30	0901	S	0		-	16.1	34.79						
12/29 1956	0740	S	0	-	•	17.5	34.67						
1/5	1220	S	0	-	049	15.5	35.43						
1/11	0945	S	0	-		12.8	34.63						
1/25	1300	S	0	-	-	12.5	35.50						
1/31	1640	S	0	-	-	18.2	35.20						
2/8	1153	S	0	-	-	19.5	35.72						
3/7	1330	S	0	-	-	23,2	35.92						
4/11	1435	S	0	qm	-	20.0	36.29						
5/9	1900	S	0	-	-	26.9	36.64						
6/12	0825	S	0	-	-	28.0	36.93						
7/17	1245	S	0	-	-	31.7	37.47						
1957 5/23	1051	S		0.2	-	29.8	34.98						
6/14	1305	S	0	-		30.7	35.07						
	STATIC	ON A	36	Dept	h of	45 feet	27° 20	ı N		82° 5	21 W		
1954						00 5	05.05						
6/30	1106	S	0	-	***	30.5	35.37						
0/22	1.450	В	0	-	-	29.5	35.34						
8/11	1458	S	0	-	•	31.6	35, 26						
0/11/	1/05	В	0	-	-	29.9	35.41						
9/14	1635	S		40	-	29.3	35.10						
1955		В		5	_	28.9	35.79						
2/16	0956	S	0	-	-	14.2	34.38						
(100		В	0	-	-	14.6	35.17						
6/29	1130	S	0	-	-	30.3	36.35						
E 126	1010	В	0	-	-	29.7	36.24						
7/19	1019	S	0	-		29.2	36.29						
0.10	3/00	В	0	-	000	28.9	36.24						
8/3	1633	S	0	-	•••	30.0	36.65						
0.1-5	0000	В	0	•••	-	30.0	36.58						
8/13	0923	S B	0	-	-	29.7 30.0	36.22 36.27						
		D	U	_	-	50.0	20061						

	D	m:	S				0.0	C-1		P	O_4	NO ₃ -		
	Date	Time	or B	G. b	M.	рН	°C	Sal.	Cu.	In.	Tot.	NO ₂	Car.	Pro.
,	9/28	0926	S	0	-	-	29.8	35.88						
			В	0	-	•	29.8	35.86						
	11/2	0947	S	0	-	•••	23.7	36.33						
	1956		В	0	-	-	24.0	36.31						
	2/1	1004	S	0	-	-	17.5	36.45						
			В	0	•	-	17.6	36.57						
	3/15	1201	S	0	-	-	22.5	36.53						
			В	0	-	•	22.6	36.48						
	5/10	1012	S	0	-	-	25.5	36.53						
			В	0	•	•	25.7	36.63						
	6/12	1120	S	0	-	•••	27.6	36.87						
	- 1- 1		В	0	-	-	27.5	36.87						
	8/16	1305	S	0	-	-	30.3	37.02						
	0/12	105/	В	0	-	-	29.7	37.07						
	9/13	1056	S	0	-	***	27.6	37.12						
	11/15	1502	В	0	-	nd	27.5	36.86						
	11/15	1503	S B	P 0	-	000	23.5	36.35						
	12/12	1000	S	0	-	-	23.2 19.5	36.52 35.91						
	12/12	1000	B	0	-	0+0	19.5	36.08						
	1957	/			•••	-								
	1/9	1336	S	P	-	-	19.5	36.38						
	216	1117	B S	P	-	-	19.5	36.30						
	2/6	1117	B	0	-	•	20.9	35.94						
					•	-	20.1	35.93						
	1954	STATI	ON A	1 37	Dep	th of	33 feet	27° 2	0.51 N	_	82° 4	3 * W		
	2/5	1152	S	P	•	_	18.5	34.15						
	6/30	1650	S	P	000	_	31.2	35.12						
			В	P	-	-	30.2	35.21						
	8/11	0800	S	P	-	_	30.0	34.60						
			В	0	***	_	29.8	35.05						
	1955	0.007	~	0										
	2/16	0827	S	0	-	-	14.0	34.34						
	6/28	1515	B S	0	600	8.0	14.5 29.9	35.28	0.10					
	0/20	1515	B	0	_	8.0	29.4	-	0.18					
	7/19	0940	S	0	-	8.0	29.2	36.24	0.55					
	1/17	0/10	В	0	-	8. 1	28.9	36.22	0.12					
	8/3	1716	S	0	_	0. 1	30.0	36.40	0.71					
	0,0	1.10	В	0	-	_	29.4	36.42	0.60					
	8/31	0831	S	0	-	7.7	29.8	36.02	0.60					
			В	0	•	7.8			0.25					

Doto	Ti	S	G. b	w 0.110	-11	۰.	Sal.	C.,	P	04	NO ₃ -	C	Due
Date	Time	or B	C.	M.	pН	°C	par.	Cu.	In.	Tot.	NO_2	Car.	Pro.
9/13	0832	S	0	-	-	29.5	36.02	0.09	-	0.2			
		В	0		-	29.8	36.00	0.08	-	0.1			
9/28	0850	S	0	-	8.1	29.2	35.53	0.08	0.4	0.4	-	-	0.2
11/2	0030	В	0	-	8.1	29.6	35.57	0.18	0.4	0.4	1.2	0.3	0.4
11/2	0910	S B	0	-	8.1	22.8	35.71 35.77	0.05	-	0.7	0.6	1.5	0.5
12/7	1435	S	P	_	8.2	20.7	35.55	0.14	0.9	1.1	_	0.5	1.3
	1433	В	0	_	8.2	20.3	36.07	0.20	0.4	0.5	-	0.6	2.0
1956 2/1	092 9	S	0	_	_	15.5	35.96	0.08	0.1	0.2	_	1.1	1.0
2/1	0 / 2 /	В	0	_	_	16.6	35.96	-	_	1.2	44	0.7	1.0
3/14	1425	S	0	_	8.0	22.9	36.36	0.00	_	0.1	_	0.5	0.4
		В	0	-	8.1	22.5	36.35	0.01	0.4	0.7	-	0.8	0.8
5/10	0932	S	0	-	8.1	26.0	36.56	0.00	0.1	0.3	0.1	0.9	
		В	0	-	8.1	26.1	36.86	0.38	0.1	1.5	0.0	0.8	
6/7	1345	S	0	-	8.2	27.9	37.11	0.03	0.7	1.1	0.6	0.9	0.0
- 1- 1		В	0	-	8.3	28.0	37.08	0.03	0.8	0.8	1.3	1.1	0.3
7/16	1225	S	0	-	8.2	30.5	37.20	0.05	-	0.3	0.2	1.2	0.1
0/11	1000	В	0	-	8.2	29.9	36.91	0.12	0.3	0.4	0.3	1.7	0.0
9/11	1000	S B	0	_	8.3	28.6 28.7	36.67 36.56	0.09	0.1	0.1	0.9 0.6	0.5	0.1
11/15	1540	S	0	_	8.2	23.0	36.04	0.46	0.3	0.4	0.6	1.1	0.0
11/13	1310	В	0	_	8. 1	23.0	36.02	0.17		0.3	4.0	1.0	0.4
12/12	0920	S	P	_		18.9	35.48	0.03	0.6	0.9	0.5	_	0.7
	·	В	P	-	-	19.0	35.56	0.07	_	0.6	0.7	3.8	0.6
1957 1/8	1357	S	0	_	_	19.0	35.71		0.0	0.3	0.2	3.3	0.8
1/0	255.	В	0	-		18.5	35.99	0.19	0.1	0.4	0.2	1.7	0.8
2/5	1406	S	0	_	8.0	22.7	35.80	0.55	0.3	0.3	_	0.4	0.5
		M	0	-	8.0	21.4	36.10	0.36	0.5	1.0	0.7	2.2	0.5
		В	0	-	8.1	20.4	35.80	0.39	0.5	-	0.2	0.5	0.9
1054	STATIO	A NC	38	Dep	oth of	26 feet	27°	21, 21 1	7	82°	38.71 W	_	
1954 2/5	1135	S	P	-	-	18.5	33.96						
4/14	1412	S	0	-	-	26.1	34.58						
		В	0	-	-	26.0	34.79						
9/14	1015	S	-	5	-	28.9	34.70						
1955		В	0	-		28.8	34.72						
2/17	1109	S	0	-	nus .	15.0	34.78						
		В	0	-	-	14.9	35.10						
8/31	0813	S	0	-	-	29.9	35.95						
		В	0	-	-	29.9	35.93						
9/13	1539	S	0	-	-	31.0	34.52						

Dat

1950

2 2

30.7 35.12

B 0 - -

		DIMIN		. 20 (30110	• /								
			S							P	04	NO-3		
	Date	Time	or		reve	рН	°C	Sal.	Cu.			NOZ	Car.	Pro.
			В	C.	M.					In.	Tot.			
1	1956	1/22	C	0			2/ 4	25 /2						
ı	2/1	1623	S	0	-	***	16.4	35.62						
ı	5/10	1 / 45	В	0	desti	-	16.8	35.67						
ı	5/10	1647	S	0	-		27.0	36.53						
ı	0/11	0040	В	0	-	-	26.7	36.77						
ı	9/11	0940	S	0	eve	-	27.8	37.11						
	10/20	1240	В	0	-	•	27.7	37.32						
	10/30	1340	S	0	-	-	24.0	36.27						
ı		1000	В	P	000	**	23.5	36.25						
ı	12/13	1000	S	P	-	***	19.0	35.47						
	1957		В	P	000	-	19.4	35.46						
1	6/18	1327	S	0	64	000	29.8	35.32						
			В	0	**	-	29.2	35.22						
		STATIC	N A	39	Dep	th of	7 feet	27° 20	¹ N		82°	32.71 W	-	
	1954	1242	-	-			10.0	22 44					_	
	2/5	1243	S	P	~	-	19.0	33.44						
	2/19	1530	S	P	**	-	22.0	33.68						
	3/10	0840	S	P	***	040	15.5	33.15						
ľ	3/30	1520	S B	P 0	-	-	26.1 26.0	33.38						
	4/14	1550	S	P	-	_	28.1	33.39 34.10						
	5/4	1150	S	P		-	27.6	33.71						
	6/30	0745	S	P	_	_	30.6	34.56						
	8/11	0635	S	0	_	_	30.6	33.33						
	8/17	1745	S	0	_	_	31.7	33.19						
	9/4	1200	S	0	_	_	30.9	32.62						
	9/15	1100	S	0	_	-	28.8	34.04						
	9/23	1135	S	0	-	_	28.5	31.62						
	9/24	0650	S	0	_	_	28.2	32.21						
	10/27	1530	S	0	***	-	23.5	~ ~ , ~ ,						
	11/6	0925	S	0	_	-	18.4	33.95						
	12/14	1730	S	_	45	448		33.87						
	1955													
	2/1	1945	S	0	000	-	15.4	34.09						
	2/15	1718	S	0	~	-	15.4	34.49						
	4/19	1745	S	0	-	-	26.2	35.48						
	5/5	1355	S	0	040	-	26.0	36.40						
	5/11	1500	S	0	-	-	28.2	36.15						
	5/25	1000	S	0	-	-	28.9	36.42						
	6/1	1237	S	0	~	•	29.1	27 07						
	6/9	0848	S	0	-	-	29.5	37.07						
	6/14	1155	S	0	-	**	29.4	26 40						
	6/29	1400	S	0	-	-	31.9	36.49						

70 - 4 -	m.	S	G 1]	PO ₄	NO		
Date	Time	or	G. br	_		°C	Sal.	Cu.	·		NO ₂	Car.	Pro.
	- /	В	C.	M.					In.	Tot.	2		
7/11	1650	S	0	-	-	30.2	36.33						
7/19	0732	S	0	-	7.9	28.4	35.16	0.08					
7/21	0920	S	0	***	64	29.5	34.00	0.06					
7/27	0934	S	0	-	-	30.6	34.85	0.80					
8/2	1649	S	0	-	-	30.6	35.17	0.26					
		В	0	-	**	29.7	35.59	0.23					
8/16	1800	S	0	***	**	31.1	35.35	0.18					
		B	0	***	-	30.6	35.39	0.10					
9/8	1510	S	0	-	8.0	31.8	34.63	0.08	**	1.6			
9/12	1757	S	0	-	-	32.0	33.28	0.18	**	1.7			
9/28	1615	S	0	-	7.7	30.1	34.67	0.38	-	_	-	4.0	1.0
10/6	0915	S	0	-	**	28.8	34.69	0.00	_	1.4			
11/2	0726	S	0	-	8.0	21.3	35.23	0.30	orio	-	-	13.6	5.8
11/16	0845	S	0	-	-	22.8	34.92	0.12					
11/30	0918	S	0	400	7.2	18.0	35.73	0.14					
12/8	1015	S	0	949	7.8	21.8	34.59	0.12	-	0.5	-	1.2	1.2
12/29	0745	S	0	-	7.6	18.0	35.14	0.23				~ • -	
1956													
1/5	1250	S	0	-	7.9	15.8	35.39	0.10					
1/11	1000	S	0	-	7.8	12.8	35.41	0.20					
1/25	1320	S	0	**	7.7	14.0	34.88	0.03					
1/31	1645	S	0	-	***	19.4	35.20	0.06		2.8	-	1.7	1.3
3/8	1105	S	0	-		23.9	35.62	0.06					
4/12	1055	S	0	-	8.0	19.2	36.27	0.00	2.1	2.9	₩	3.5	1.1
5/10	0725	S	0	**	8.1	26.2	-	0.00	2.8	4.3	0.1	1.8	1.0
6/7	1520	S	0	000	8.0	28.5	37.49	0.02	1.3	4.7	0.6	3.1	0.3
6/9	0848	S	0	-	7.9	29.5	37.07	•	mate .	••	0.4		
6/26	1355	S	0		7.9	31.0	37.36	0.08					
6/29	1400	S	0	-	-	31.9	36.49	**	0.9	2.0			
7/13	1220	S	0	-	8.3	31.2	36.17	0.05	1.0	1.9	0.8	2.3	0.4
- 4		В	0	-	8.3	30.8	36.08	0.08	-	4.1	0.2	2.4	0.6
7/30	1330	S	0	***	***	-	36.35	0.09					
8/27	1312	S	0	-	00	31.5	35.81	0.06					
9/1	0925	S	0	-	-	28.5	35.72	0.06					
9/6	1700	S	0	-	8.2	29.5	35.80	0.03	1.4	1.8	0.4	2.0	0.3
9/10	1135	S	P	••	000	26.7	35.65	0.02	2.0	2.3	4.8	1.4	0.3
9/24	1028	S	0	•	-	27.5	36.61	0.03					
10/8	0940	S	P	000	-	26.5	35.72	0.03					
10/17	1240	S	0	-		23.5	36.17	0.08					
10/25	1105	S	0	-	-	25.6	35.95	0.03					
10/30	1255	S	0		-	24.5	36.21	0.04	-	1.4	0.4	1.3	0.1
11/14	1105	S	P	•	8.0	21.0	36.16	0.07	1.2	2.5	1.4		0.2
11/15	1643	S	0		8.1	21.3	36.10	0.17	1.3	1.7	0.6	_	0.6
		В	P	-	8.1	21.3	36.00	0.40	_	2.2	0.0	2.0	0.6

-														
	1		S							F	PO ₄	NO ₃ -		
Pro	Date	Time	or	G.	breve	pН	°C	Sal.	Cu.		4	NO	Car.	Pro.
			В	C.	M.					In.	Tot.	2		
	12/3	1037	S	P	-	-	17.0	35.39	0.04					
	12/11	1552	S	0	-	-	21.0	35.41	0.06	_	1.9	2.6	1.4	0.5
ı			В	0	-	_	21.0	35.56	0.07	2.6	3.9	0.4	2.0	0.4
И	12/20	1614	S	0	-	-	22.0	61	0.26					
	1957	1521	S	0				25 22		1 2		1 1	1 0	0 "
	1/9	1521	В	P	-	-	19.7	35.22	-	1.3	-	1.1	1.8	0.5
	1/28	1235	S	0	-	-	20.3	35.46 35.38	0.44	1.7	-	0.4	2.8	1.0
	2/5	1618	S	0	•	***	24.3	35.54	0.00	0 0	1.3	0 2	1 7	0 5
	2/26	1007	S	0	00	-	21.0	34.48	0.06	0.8	1.5	0.3	1.7	0.5
1	3/28	1003	S	P	64	-	21.0			0 0	2 2	0 0	1 7	0 6
ı	4/12	1202	S	0	010	-	24.5	34.67 33.05	0.00		2.2	0.8	1.7	0.6
4	4/22	1608	S	0	***	_	25.5	33.31	0.08	1.0	1.4	0.6	1.0	0.5
1	5/7	1200	S	0	_	_	25.5	34.07	0.02					
ı	5/27	1035	S	P		_	30.3	33.97	0.38					
ı	6/3	1005	S	P	-	_	29.0	34.42	0.10					
ı	6/11	1020	S	0	_	_	30.5	29.70	0.00					
ŀ	6/17	0930	S	0	_		29.0	34.15	0.10					
ı	0,				Danie	LL of					020	22 41 317		
ŀ	1955	STATIO	JN A	40	Depi	in oi	7 feet	21-1	8.31 N		84	33.4° W	-	
ľ	5/11	1430	S	0	-	••	29.1	36.36						
ı	5/25	1035	S	0	~	-	29.1	36.41						
ı	6/1	1301	S	0	ere.	-	30.0							
ı	6/14	1300	S	0		-	30.5							
	6/29	1428	S	0	-	•	32.8	35.84						
	7/11	1724	S	0			30.2	36.49						
	7/21	1013	S	0	-	-	29.7	35.34						
	7/27	0945	S	0	-	-	30.3	34.67						
	8/11	0925	S	0	••	-	30.8	34.76						
	8/16	1650	S	0	-	-		34.65						
	8/24	0946	S	0	-	-	31.4	34.70						
	8/30	1138	S	0	***	600	30.0	34.69						
	9/8	1530	S	0	616	-	31.0	34.38						
	9/27 10/6	1645 0955	S S	0	-	-	30.0	34.22						
	11/1	1615	S	0	-	_	29.0	33.77						
	11/16	0900	S	0	•	-	23. 4 22. 8	35.42 34.74						
	11/10	0945	S	0	••	-	15.0	35. 32						
	12/29	0825	S	0	and	010	17.5	35.32						
	1956	0023	S	J	••	-	11.5	33,37						
	1/5	1320	S	0		_	17.0	35.24						
	1/11	1050	S	0	-	-	12.9	34.70						
	1/25	1345	S	0		040	14.0	35.21						

Date	e Time	S	_	1	_				I	20	NO ₃ -		
Dati	c 1 mile	or B	C.	breve	_ ~	e C	Sal.	Cu.			3	Car.	Pro.
1/3	1 1410	S	0	M.					In.	Tot.	NO ₂	•	110.
2/8		S	0	-	_	19.0							
2/14		S		-	-	20.5							
2/29		S	0		-	18.8							
3/8	1130	S	0	-	-	18.2							
3/14		S	0	-	_	24.8							
3/26		S		-	-	20.4							
4/3	1052	S	0	-	-	18.4	35.96						
4/12		S	0		-	22.0	36.43						
4/18		S	0	•	-	20.3	36.42						
4/25		S	0	-	-	21.8	36.35						
5/9	1805		0	-	=	22.6	35.75						
6/26		S	0	-	-	26.7	36.63						
7/17		S	0	-	-	30.7	37.36						
7/30		S	0	-	-	31.2	36.84						
8/6	1353	S	0	-	-	29.0	36.70						
	0918	S	0	-	-	31.0	37.33						
8/13	1107	S	0	_	-	29.8	36.75						
8/27	1317	S	0	-	-	30.7	35.99						
9/4	0928	S	0	-	-	29.0	36.68						
9/12	0945	S	0	•	-	25.6	35.81						
9/24	1034	S	-	0.2	-	27.2	36.52						
10/2	1220	S	P	-	-	27.5	36.80						
10/8	0947	S	0	-	-	26.5	33.15						
10/17	1245	S	0	-	-	23.5	35.53						
10/25	1125	S	0	-	-	25.4	35.30						
11/1	1050	S	0	-	-	23.5	36.44						
11/7	1111	S	0	•	-	22.6	35.92						
11/15	1132	S	0	-	-	21.0	35.71						
11/19	1055	S	0		-	21.3	35.80						
11/26	1145	S	0	000	-	19.5	35.67						
12/3	1057	S	0	-	-	17.5	35.28						
12/11	1235	S	0	-	-	20.5	35.43						
12/20	1617	S	0	-	-	21.5	35.45						
1957 1/15	1008	S	0			10 =							
1/22	1058	S	0	-	-	19.5	35.67						
1/28	1240	S		-	-	18.0	35.40						
2/5	0938	S	0	***	-	20.7	35.27						
2/11	0930	S	0	•		23.0	35.02						
2/11	1013	S	P	-	-	23.3	35.62						
3/7	1356	S	0		-	20.8	35.26						
3/12			0	-	-	21.0	35.04						
	1046	S	P	-	-	18.5	35.10						
3/18	1326	S	0	-	•••	20.0	35.44						

•	Date	Time	S				*6	G-1		F	PO ₄	NO-		
ı	Date	типе	or B	<u>C.</u>	breve M.	рн	°C	Sal.	Cu.	In.	Tot.	NO 2	Car.	Pro.
ľ	3/28	1355	S	P		_	22.0	34.04						
ŀ	4/8	1058	S	P	-	_	24.5	35.14						
ı	4/17	1015	S	P	44	•	22.5	35.32						
ı	4/22	1547	S	P	-	-	25.5	34.00						
ŀ	5/3	0852	S	0	-	-	26.2	33.78						
	5/7	1207	S	0	649	-	25.3	33.58						
	5/14	1424	S	0		84	27.5	34.87						
	5/21	0957	S	0	_	-	30.0	32.65						
	5/27	1039	S	0	•	-	30.0	34.95						
	6/3	10 1 0	S	0	-	-	29.0	35, 23						
	6/11	1016	S	0	-	649	29.5	32.23						
	6/17	0935	S	0	-	-	28.5	33.96						
	6/25	1240	S	0	-	-	64	34.67						
		STATIO	A NC	41	Dep	th of	21 feet	27°	18.51	Ž.	82°	35.81 W		
	1954 2/5	1210	s	P	_	_	18.6	33.97						
	3/10	1110	S	P	_	_	16.5	33.39						
	0,20		В	0	_	-	16.0	33.91						
	4/14	1438	S	P	••	_	27.0	34.47						
	8/11	0728	S	P	-	_	29.9	34.79						
			В	0	***	•	30.0	34.88						
	9/4	0950	S	P	-	-	29.4	34.54						
	9/14	0940	S	-	11	-	28.8	34.76						
	1955		В	0	_	64	28.9	34.74						
	2/16	0800	S	0	**	_	14.2	34.38						
	7/19	0905	S	0	_	-	28.9	36.15						
			В	0	_	_	28.9	36.20						
	8/3	1748	S	0	-	-	-	35.26						
			В	0	-	-	-	36.11						
	8/31	0753	S	0	***	-	29.9	35.77						
			В	0	-		30.0	35.84						
	9/13	0759	S	0	-	-	29.2	34.60						
	- 1		В	0	-	-	29.8	35.01						
	9/28	0817	S	0	-	_	29.2	35. 23						
	22/0	0000	В	0	-	-	29.2	35.30						
	11/2	0837	S	0	-	-	21.8	35.35 35.41						
	1956	0054	В	0	_	-								
	2/1	0854	S	0	-	-	16.2 16.3	35.63						
	6/12	1251	В S	0	-	dest	28.1	35.70 37.06						
	6/12	1251	B	0	_	-	29.9	37.00						
	7/16	1155	S	0	-	_	30.5	36.91						
	, 20		В	Ö	-	-	30.0	36.94						

B C. M. In. Tot. 2 9/11 0919 S 0 26.6 37.02 B 0 26.5 36.84 11/15 1613 S 0 21.0 35.64 B 0 22.0 35.73 12/12 0845 S 0 - 18.5 35.41 B 0 18.6 35.58 1957 1/9 1434 S P - 19.5 35.55 B P - 18.9 35.69 6/18 1355 S 0 - 29.8 35.08 B 0 - 29.2 35.17 STATION A 42 Depth of 29 feet 27° 16' N 82° 35' W	Pro.
Bate Time of G. M. B C. M. 9/11 0919 S 0 26.6 37.02 B 0 26.5 36.84 11/15 1613 S 0 21.0 35.64 B 0 22.0 35.73 12/12 0845 S 0 - 18.5 35.41 1957 1/9 1434 S P - 19.5 35.55 B P - 18.9 35.69 6/18 1355 S 0 - 29.8 35.08 B 0 - 29.2 35.17 STATION A 42 Depth of 29 feet 27° 16' N 82° 35' W	Pro.
9/11 0919 S 0 26.6 37.02 B 0 26.5 36.84 11/15 1613 S 0 21.0 35.64 B 0 22.0 35.73 12/12 0845 S 0 - 18.5 35.41 1957 1/9 1434 S P - 19.5 35.55 B P - 18.9 35.69 6/18 1355 S 0 - 29.8 35.08 B 0 - 29.2 35.17 STATION A 42 Depth of 29 feet 27° 16' N 82° 35' W	
B 0 26.5 36.84 11/15 1613 S 0 21.0 35.64 B 0 22.0 35.73 12/12 0845 S 0 18.5 35.41 1957 1/9 1434 S P - 19.5 35.55 B P - 18.9 35.69 6/18 1355 S 0 - 29.8 35.08 B 0 - 29.2 35.17 STATION A 42 Depth of 29 feet 27° 16' N 82° 35' W	
B 0 26.5 36.84 11/15 1613 S 0 21.0 35.64 B 0 22.0 35.73 12/12 0845 S 0 18.5 35.41 1957 1/9 1434 S P - 19.5 35.55 B P - 18.9 35.69 6/18 1355 S 0 - 29.8 35.08 B 0 - 29.2 35.17 STATION A 42 Depth of 29 feet 27° 16' N 82° 35' W	
11/15 1613 S 0 21.0 35.64 B 0 22.0 35.73 12/12 0845 S 0 18.5 35.41 1957 1/9 1434 S P 19.5 35.55 B P 18.9 35.69 6/18 1355 S 0 29.8 35.08 B 0 29.2 35.17 STATION A 42 Depth of 29 feet 27° 16' N 82° 35' W	
B 0 22.0 35.73 12/12 0845 S 0 18.5 35.41 1957 1/9 1434 S P 19.5 35.55 B P 18.9 35.69 6/18 1355 S 0 29.8 35.08 B 0 29.2 35.17 STATION A 42 Depth of 29 feet 27° 16' N 82° 35' W	
12/12 0845 S 0 18.5 35.41 1957 1/9 1434 S P 19.5 35.55 B P 18.9 35.69 6/18 1355 S 0 29.8 35.08 B 0 29.2 35.17 STATION A 42 Depth of 29 feet 27° 16' N 82° 35' W	
B 0 18.6 35.58 1/9 1434 S P 19.5 35.55 B P 18.9 35.69 6/18 1355 S 0 29.8 35.08 B 0 29.2 35.17 STATION A 42 Depth of 29 feet 27° 16' N 82° 35' W	
1/9 1434 S P 19.5 35.55 B P 18.9 35.69 6/18 1355 S 0 29.8 35.08 B 0 29.2 35.17 STATION A 42 Depth of 29 feet 27° 16' N 82° 35' W	
B P 18.9 35.69 6/18 1355 S 0 29.8 35.08 B 0 29.2 35.17 STATION A 42 Depth of 29 feet 27° 16' N 82° 35' W	
6/18 1355 S 0 29.8 35.08 B 0 29.2 35.17 STATION A 42 Depth of 29 feet 27° 16' N 82° 35' W	
B 0 - 29.2 35.17 STATION A 42 Depth of 29 feet 27° 16' N 82° 35' W	
STATION A 42 Depth of 29 feet 27° 16' N 82° 35' W	
1955	
6/28 1430 S U = 7.9 31.3 = 0.19	
6/28 1430 S 0 - 7.9 31.3 - 0.19 B 0 - 8.0 31.4 - 0.39	
7/18 1830 S 0 = 7.9 29.6 35.59 0.05	
B 0 = 7.9 29.5 35.59 0.17	
8/2 1606 S 0 30.0 36.33 0.52	
B 0 = 28.9 36.20 0.20	
8/4 0838 S 0 28.9 36.26 0.66	
B P = - 28.6 36.31 0.31	
8/16 1720 S 0 30.6 35.79 0.09	
B 0 29.7 36.24 0.07	
8/17 0848 S 0 30.0 36.13 0.12	
B 0 = - 29.7 35.88 0.08	
9/14 0920 S 0 = - 29.9 34.42 = - 0.3	
B 0 30.5 34.31 0.03 - 2.3	
9/27 1644 S 0 - 8.0 29.2 34.56 0.05	
B 0 - 8.0 29.2 34.99 0.14 - 1.2 0.8 12.4	5.1
11/2 0821 S 0 - 8.1 21.3 35.30 0.22	
B 0 - 8.1 21.4 - 0.01 4.0	2.0
12/7 1323 S 0 - 8.1 20.1 34,93 0.19 - 1.0 - 1.3	1.0
P 0 9 1 10 0 35 45 0 11 1 2 2 2 3	
1956 1/31 1556 S 0 17.2 35.51 - 0.1 0.3 - 1.1	1.0
	0.0
	11.
B 0 17.9 35.62 0.02 0.1 0.4 - 1.0	
B 0 17.9 35.62 0.02 0.1 0.4 - 1.0 3/14 1346 S P - 8.0 23.7 36.08 0.10 0.3 0.8 - 0.8	0.9
B 0 17.9 35.62 0.02 0.1 0.4 - 1.0 3/14 1346 S P - 8.0 23.7 36.08 0.10 0.3 0.8 - 0.8 B 0 - 8.1 22.9 36.25 0.04 0.2 0.7 - 0.1	0.9 1.2
B 0 - 17.9 35.62 0.02 0.1 0.4 - 1.0 3/14 1346 S P - 8.0 23.7 36.08 0.10 0.3 0.8 - 0.8 B 0 - 8.1 22.9 36.25 0.04 0.2 0.7 - 0.1 5/9 1358 S 0 - 8.2 27.0 36.64 0.00 0.3 1.1 0.2 1.3	0.9 1.2 0.3
B 0 - 17.9 35.62 0.02 0.1 0.4 - 1.0 3/14 1346 S P - 8.0 23.7 36.08 0.10 0.3 0.8 - 0.8 B 0 - 8.1 22.9 36.25 0.04 0.2 0.7 - 0.1 5/9 1358 S 0 - 8.2 27.0 36.64 0.00 0.3 1.1 0.2 1.3 B 0 - 8.3 26.8 36.33 0.00 0.3 0.5 0.0 1.0	0.9 1.2 0.3 0.1
B 0 17.9 35.62 0.02 0.1 0.4 - 1.0 3/14 1346 S P - 8.0 23.7 36.08 0.10 0.3 0.8 - 0.8 B 0 - 8.1 22.9 36.25 0.04 0.2 0.7 - 0.1 5/9 1358 S 0 - 8.2 27.0 36.64 0.00 0.3 1.1 0.2 1.3 B 0 - 8.3 26.8 36.33 0.00 0.3 0.5 0.0 1.0 6/7 1257 S 0 - 8.3 28.3 37.41 0.02 1.0 1.5 0.4 1.0	0.9 1.2 0.3 0.1 0.1
B 0 - 17.9 35.62 0.02 0.1 0.4 - 1.0 3/14 1346 S P - 8.0 23.7 36.08 0.10 0.3 0.8 - 0.8 B 0 - 8.1 22.9 36.25 0.04 0.2 0.7 - 0.1 5/9 1358 S 0 - 8.2 27.0 36.64 0.00 0.3 1.1 0.2 1.3 B 0 - 8.3 26.8 36.33 0.00 0.3 0.5 0.0 1.0	0.9 1.2 0.3 0.1

Date Time or G. breve pH or Sal. Cu. PO NO NO In. Tot. NO In. In.
Sale Sale
B C M In Tot NO 2
9/6
B 0 - 8.2 29.0 36.40 0.05 1.0 1.2 1.0 1.7 0.2
10/30 1257 S P - 8.1 23.8 36.46 0.05 1.0 1.4 0.5 1.3 0.1 B 0 - 8.1 23.8 36.47 0.02 1.1 1.1 0.1 0.7 0.1 11/16 0736 S 0 - 8.0 20.5 35.64 0.00 1.4 1.8 0.2 1.4 0.5 B 0 - 8.0 20.4 35.83 0.40 - 2.4 0.1 1.3 0.6 12/11 1442 S 0 - 19.0 35.46 0.09 - 1.0 0.2 0.7 0.4 1957 B 0 - 19.0 35.64 0.08 - 0.9 3.4 1.5 0.4 1957 1/8 1316 S 0 - 19.0 35.52 - 1.2 B 0 - 18.5 35.60 0.00 - 1.4 2/5 1329 S 0 - 8.1 22.8 35.90 0.35 0.4 0.6 0.4 0.4 0.4 B 0 - 8.2 22.1 35.90 0.43 0.3 0.3 - 0.3 0.1 STATION A 43 Depth of 3 feet 27° 15' N 82° 32.3' W 1954 8/10 1430 S P - 25 - 28.8 34.79 B 0 - 28.8 34.78 10/5 1237 S P - 28.6 33.46 10/5 1237 S P - 28.6 33.46 1955 5/6 1305 S 0 - 27.5 36.06 5/25 1100 S 0 - 29.6 36.50
B 0 - 8.1 23.8 36.47 0.02 1.1 1.1 0.1 0.7 0.1
11/16 0736 S 0 - 8.0 20.5 35.64 0.00 1.4 1.8 0.2 1.4 0.5 B 0 - 8.0 20.4 35.83 0.40 - 2.4 0.1 1.3 0.6 12/11 1442 S 0 - 19.0 35.46 0.09 - 1.0 0.2 0.7 0.4 B 0 - 19.0 35.64 0.08 - 0.9 3.4 1.5 0.4 1957 1/8 1316 S 0 - 19.0 35.52 - 1.2 B 0 - 18.5 35.60 0.00 - 1.4 2/5 1329 S 0 - 8.1 22.8 35.90 0.35 0.4 0.6 0.4 0.4 0.4 B 0 - 8.2 22.1 35.90 0.43 0.3 0.3 - 0.3 0.1 STATION A 43 Depth of 3 feet 27° 15' N 82° 32.3' W 1954 8/10 1430 S P - 31.6 34.58 9/14 0915 S - 25 - 28.8 34.79 B 0 - 28.8 34.78 10/5 1237 S P - 28.6 33.46 1955 5/6 1305 S 0 - 27.5 36.06 5/25 1100 S 0 - 29.6 36.50
B 0 - 8.0 20.4 35.83 0.40 - 2.4 0.1 1.3 0.6 12/11 1442 S 0 19.0 35.46 0.09 - 1.0 0.2 0.7 0.4 B 0 19.0 35.64 0.08 - 0.9 3.4 1.5 0.4 1957 1/8 1316 S 0 19.0 35.52 1.2 B 0 18.5 35.60 0.00 - 1.4 2/5 1329 S 0 - 8.1 22.8 35.90 0.35 0.4 0.6 0.4 0.4 0.4 B 0 - 8.2 22.1 35.90 0.43 0.3 0.3 - 0.3 0.1 STATION A 43 Depth of 3 feet 27° 15' N 82° 32.3' W 1954 8/10 1430 S P 31.6 34.58 9/14 0915 S - 25 - 28.8 34.79 B 0 28.8 34.78 10/5 1237 S P 28.6 33.46 1955 5/6 1305 S 0 27.5 36.06 5/25 1100 S 0 29.6 36.50
12/11 1442 S 0 19.0 35.46 0.09 - 1.0 0.2 0.7 0.4 1957 1/8 1316 S 0 19.0 35.52 1.2 B 0 18.5 35.60 0.00 - 1.4 2/5 1329 S 0 - 8.1 22.8 35.90 0.35 0.4 0.6 0.4 0.4 0.4 B 0 - 8.2 22.1 35.90 0.43 0.3 0.3 - 0.3 0.1 STATION A 43 Depth of 3 feet 27° 15¹ N 82° 32.3¹ W 1954 8/10 1430 S P - 31.6 34.58 9/14 0915 S - 25 - 28.8 34.79 B 0 - 28.8 34.78 10/5 1237 S P - 28.6 33.46 1955 5/6 1305 S 0 - 27.5 36.06 5/25 1100 S 0 - 29.6 36.50
1957 1/8 1316 S 0 19.0 35.64 0.08 - 0.9 3.4 1.5 0.4 1/8 1316 S 0 19.0 35.52 1.2 B 0 - 18.5 35.60 0.00 - 1.4 2/5 1329 S 0 - 8.1 22.8 35.90 0.35 0.4 0.6 0.4 0.4 0.4 0.4 0.4 0.4 0.4 0.4 0.4 0.4
1957 1/8 1316 S 0 19.0 35.52 1.2 B 0 18.5 35.60 0.00 - 1.4 2/5 1329 S 0 - 8.1 22.8 35.90 0.35 0.4 0.6 0.4 0.4 0.4 0.4 0.4 0.4 0.4 0.4 0.4 0.4
B 0 18.5 35.60 0.00 - 1.4 2/5 1329 S 0 - 8.1 22.8 35.90 0.35 0.4 0.6 0.4 0.4 0.4 B 0 - 8.2 22.1 35.90 0.43 0.3 0.3 - 0.3 0.1 STATION A 43 Depth of 3 feet 27° 15' N 82° 32.3' W 1954 8/10 1430 S P 31.6 34.58 9/14 0915 S - 25 - 28.8 34.79 B 0 28.8 34.79 B 0 28.8 34.78 10/5 1237 S P - 28.6 33.46 1955 5/6 1305 S 0 - 27.5 36.06 5/25 1100 S 0 - 29.6 36.50
2/5
B 0 - 8.2 22.1 35.90 0.43 0.3 0.3 - 0.3 0.1 STATION A 43 Depth of 3 feet 27° 15' N 82° 32.3' W 1954 8/10 1430 S P - 31.6 34.58 9/14 0915 S - 25 - 28.8 34.79 B 0 - 28.8 34.78 10/5 1237 S P - 28.6 33.46 1955 5/6 1305 S 0 - 27.5 36.06 5/25 1100 S 0 - 29.6 36.50
STATION A 43 Depth of 3 feet 27° 15' N 82° 32.3' W 1954 8/10 1430 S P 31.6 34.58 9/14 0915 S - 25 - 28.8 34.79 B 0 28.8 34.78 10/5 1237 S P 28.6 33.46 1955 5/6 1305 S 0 27.5 36.06 5/25 1100 S 0 29.6 36.50
1954 8/10 1430 S P 31.6 34.58 9/14 0915 S - 25 - 28.8 34.79 B 0 28.8 34.78 10/5 1237 S P - 28.6 33.46 1955 5/6 1305 S 0 - 27.5 36.06 5/25 1100 S 0 - 29.6 36.50
1954 8/10 1430 S P 31.6 34.58 9/14 0915 S - 25 - 28.8 34.79 B 0 28.8 34.78 10/5 1237 S P - 28.6 33.46 1955 5/6 1305 S 0 - 27.5 36.06 5/25 1100 S 0 - 29.6 36.50
8/10 1430 S P 31.6 34.58 9/14 0915 S - 25 - 28.8 34.79 B 0 28.8 34.78 10/5 1237 S P 28.6 33.46 1955 5/6 1305 S 0 27.5 36.06 5/25 1100 S 0 29.6 36.50
9/14 0915 S - 25 - 28.8 34.79 B 0 - 28.8 34.78 10/5 1237 S P - 28.6 33.46 1955 5/6 1305 S 0 - 27.5 36.06 5/25 1100 S 0 - 29.6 36.50
B 0 28.8 34.78 10/5 1237 S P 28.6 33.46 1955 5/6 1305 S 0 27.5 36.06 5/25 1100 S 0 29.6 36.50
10/5 1237 S P - 28.6 33.46 1955 5/6 1305 S 0 - 27.5 36.06 5/25 1100 S 0 - 29.6 36.50
1955 5/6 1305 S 0 27.5 36.06 5/25 1100 S 0 29.6 36.50
5/6 1305 S 0 27.5 36.06 5/25 1100 S 0 29.6 36.50
6/1 1318 S 0 31.6 36.89
6/14 1320 S 0 31.1
6/29 1445 S 0 33.4 36.92
7/11 1747 S 0 29.7 36.36
7/21 1025 S 0 - 29.7 35.86
7/27 1005 S 0 30.6 36.22
8/11 0940 S 0 - 30.3 36.09
8/16 1635 S 0 35.70
8/24 1003 S 0 31.4 35.93
8/30 1200 S 0 31.0 35.57
9/8 1550 S 0 - 31.0 35.59
9/27 1631 S 0 30.9 34.99
10/6 1010 S 0 30.0 34.92
·
11/16 0930 S 0 22.1
11/30 1000 S 0 15.8 36.02
12/29 0845 S 0 17.0 35.34
1956 1/5 1355 S 0 16.0 35.47
1/11 1110 S 0 12.5 35.07
1/25 1410 S 0 - 13.7 35.37
1/31 1350 S 0 18.1 35.79

		S							P	O ₄	NO-		
Date	Time	or			рН	°C	Sal.	Cu.			3 NO	Car.	Pro
		В	C.	М.			·		In.	Tot.	NO ₂		
2/8	1315	S	0	-	-	20.8	35.72						
3/8	1145	S	0	***	-	23.6	36.11						
4/12	1130	S	0	010	010	19.9	36.50						
5/9	1745	S	0	-	010	26.5	36,83						
	STATIC	ON A	44	De	pth o	f 6 feet	27°	15.2' N	1	82°	31.91 W	7_	
1954	1225	c	0			17 5	20 70						
3/10	1325 1315	S S		-	-	17.5	29.79						
5/4 8/10	1445	S	P 0	-	-	29.4	30.08						
10/5	1225	S	0	_	***	33.5	23.44						
1955	1223	3	U	***	_	29.4	17.56						
5/5	1245	S	0	•••	0.00	26.4	36.49						
5/11	1405	S	0	-	840	30.5	35.90						
5/25	1110	S	0	_		29.7	36.87						
6/1	1352	S	0	***	_	29.9							
6/14	1345	S	0	-	_	31.0							
6/29	1456	S	0	-	-	33.4	37.23						
7/11	1754	S	0	-	•	31.0	35.10						
7/21	1040	S	0	-	••	28.4	35.66						
7/27	1013	S	0	**	-	30.8	24.13						
8/11	0950	S	0	-	010	31.1	22.45						
8/16	1625	S	0	***	010	31.7	27.72						
8/24	1010	S	0	**	-	32.5	29.47						
8/30	1224	S	0	-	-	30.2	28.40						
9/8	1555	S	0	***	-	33.0	12.23						
9/27	1624	S	0	**	-	31.0	26. 17						
10/6	1018	S	0	-	-	30.1	29.27						
11/1	1600	S	0	-	-	24.9	35.50						
11/16	0935	S	0	•••	**	23.9	33. 16						
11/30	1005	S	0	-	***	16.7	31.44						
12/29	0850	S	0	***	-	18.8	32.61						
1956 1/5	1410	S	0	_	_	15.0	31.15						
1/25	1415	S	0	_		15.0	32.86						
1/23	1345	S	0	-	_	21.0	33.63						
2/8	1335	S	0		_	21.5	34.82						
3/8	1150	S	0	-	***	25.0	36. 16						
4/12	1141	S	0		049	18.9	35.45						
5/9	1735	S	0	**	**	27.5	36.30						
7/17	1256	S	0	_	_	31.9	33.93						
. / 1	STATIO			Den	th of	28 feet		13¹ N		82° 3	2.51 W		
1954												•	
2/5	0855	S	P	010	-	18.0	34.52						
3/10	1025	S	0	040	010	16.0	33.66						
		В	0	810	-	16.0	34.00						

		S								PO	NO-		
Date	Time	or		oreve	рН	°C	Sal.	Cu.		4	NO_2	Car.	Pro.
		В	C.	M.					In.	Tot.	2		
4/14	1216	S	P	-	-	26.2	34.43						
		В	0	-	-	25.6	34.49						
9/4	1028	S	P	-	-	29.5	34.20						
		В	P	***	-	29.4	34.65						
9/13	1553	S	048	8		28.3	34.81						
1955		В	P	-	-	28.5	34.88						
2/17	1127	S	0	-		15.1	34.47						
8/2	1549	S	0	-	-	-	36.12						
		В	0	***	-	-	33.36						
9/12	1708	S	0		***	30.1	34.52						
		В	0	-	***	30.0	35.21						
9/27	1627	S	0	-	***	29.5	35.05						
		В	0	-	-	29.2	35.08						
11/1	1720	S	P		-	23.0	35.35						
1956		В	0	-	-	23.0	35.34						
2/2	0949	S	0	-	***	16.8	34.83						
		В	0	ordi	***	16.6	35.59						
10/30	1238	S	P		***	24.2	36.55						
1957		В	P	-	-	23.9	36.56						
5/7	1222	S	0	***	-	26.0	23.46						
	STATI	ON A	46	Dep	th of	6 feet	27°	12.5°	N	82°	30.61 W		
1955												-	
4/5 1956	1055	S	0		***	20.8							
2/14	1135	S	0	-	_	17.2	35.68						
2/29	1202	S	0	-	_	19.9	35.95						
3/14	1019	S	0	-	**	24.0	36.33						
3/26	1245	S	0	-	-	19.0	36.31						
4/3	1100	S	0	-	•••	23.0	36.51						
4/18	1355	S	0	-	-	22.8	36.44						
4/25	1120	S	0	-	-	22.8	36.35						
6/26	1410	S	0	***		31.0	37.25						
7/17	1301	S	0	-	-	32.0	37.2 2						
7/30	1402	S	0	-	-	28.5	36.83						
8/6	0927	S	0	***		-	37.27						
8/13	1116	S	0	-	-	30.8	37.36						
8/27 9/4	1326	S S	0	-	-	31.2	36.80						
	0939		0		•=	29.5	36.80						
9/12 9/24	0957	S S	0	0.2	-	25.5 27.1	32. 23 36. 53						
10/2	1045 1227	S	0	0.2	-	27.7	36.72						
10/2	0958	S	0	•	_	26.6	32.33						
10/8	1255	S	0	-		24.2	35.57						
10/11	1255	3	U	-		LI. L	55.51						

		S								PO	NO-		
Date	Time	or		breve	pН	°C	Sal.	Cu.		4	3	Car.	Pro.
		В	С.	М.					In.	Tot.	NO_2		
10/25	1144	S	0	-	-	25.8	34.47						
11/1	1114	S	0	-	-	24.2	36.37						
11/7	1120	S	0	-	-	23.2	36.45						
11/15	1147	S	P	-	-	21.3	35.71						
11/19	1108	S	0	-	-	21.5	35.95						
11/26	1131	S	0	-	-	19.5	35.86						
12/3	1106	S	0	-	-	17.5	35. 29						
12/11	1244	S	0	-	-	19.5	35.43						
12/20	1625	S	0	-	-	21.5	35.47						
1957	1220	c	0			10 5	35 50						
1/9 1/15	1339 1016	S S	0	-	-	19.5	35.59						
1/13	1145	S	0	-	-	19.5	35.51						
1/28	1248	S	0	_	-	19.7	35.50						
2/5	0948	S	0	-	_	21.0	36.01						
2/11	0940	S	P	-	-	22.5	35.82						
2/26	1020	S	0	-	-	23.0 20.7	35.62 35.23						
3/7	1406	S	0	-	-	21.0	35. 23						
3/12	1050	S	0	-	-	18.8	35.00						
3/18	1334	S	0	-	-	20.5	35.46						
3/28	1346	S	0	-	-	23. 2	35.40						
4/8	1108	S	P	_	_	25.0	35.23						
4/17	1024	S	0	_	_	23.0	35.31						
4/22	1538	S	0	_	_	25.0	35.02						
5/3	0859	S	P	-	_	26.2	32.99						
5/7	1215	S	P	_	_	25.8	33.57						
5/14	1431	S	0	_	_	29.0	34.46						
5/21	1005	S	0	_	-	29.7	35.02						
5/27	1047	S	0	-	-	30.5	35.12						
6/3	1017	S	P	-	_	29.0	34.89						
6/11	1030	S	0	-	_	29.7	34.80						
6/17	0944	S	0	-	-	28.2	35.13						
6/25	1250	S	0	-	_	20,2	34.70						
·	STATIC			Den	th of	52 feet	27°]	101 N		82° 4	21 W		
1955				Бер						02 1			
6/29	1231	S	0	-	8.0	30.5	36.49	0.15					
		В	0	-	8.1	29.6	36.42	0.16					
7/20	1429	S	0	-	8.0	29.0	36.45	0.12					
8/4	0921	S	0	-	-	28.3	36.58	0.28					
		В	0	-	_	28.9	36.58	0.30					
8/17	0941	S	0	-	-	30.0	36.36	0.10					
9/14	1005	S	0	•	-	29.7	_	-	-	0.1			
		В	0	-	-	30.2	35.90	-	-	0.1			

-	T:	S	<i>C</i> 1		7.7	0.0	S-1		F	04	NO-3		
Date	Time	or B	C.	M.	pН	°C	Sal.	Cu.	In.	Tot.	NO	Car.	Pro.
9/29	0925	S	0	-	7.9	29.8	35, 26	0.18	0.6	0.6	1.0	0.6	0.8
		В	0	~	8.0	29.6	35.53	0.04	-	0.3	1.4	0.0	0.4
11/3	0920	S	0	↔	8.0	23.5	36.24	0.22					
		В	0	-	8.0	23.8	36,24	0.14					
12/8	1300	S	0	~	8. 1	22.2	36, 14	0.27	-	0.6	-	0.7	
1956		В	0	0-8	8. 1	21.0	36, 22	0.24	₩	-	-	0.7	
1/31	1522	S	0	_	-	16.5	36.19	0.04	0.0	0.9	-	0.9	
		В	0	m,	rea .	16.5	36.14	-	_	0.0	mò	1.0	0.6
3/15	1320	S	0	-	-	23.2	36.47	0.04					
		В	0	***	-	23.0	36.53	0.02	-	-	-	0.4	0.2
5/14	1046	S	0	-	8.2	26.7	36.84	0.35		0.4	0.1	0.8	0.0
		В	0	ged.	8.2	26.9	36.78	0.00	0.2	0.3	0.3	3. 1	0.0
6/13	0803	S	0	6-9	8.4	27.0	36.97	0.09	0.1	0.3	ŭ. 3	0,8	0.0
		В	0	-	8.4	27.0	37.06	0.07	0.1	0.3	0.0	1.0	0.0
7/17	1012	S	0	-	8.2	29.5	37.05	0.04	-	0.0	0.5	1.2	0.0
0/12	1200	В	0	•	8.1	29.5	37.10	0.05	~ ~	0.2	0.5	1.2	0.0
9/13	1200	S B	0	•	8.2	28.1	36.37	0.04	0.2	0.7	0.2	0.7	0.3
11/16	0823	S	0	-	8.2	27.3	36.46 36.40	0.03	0.3	0.5	9.1	0.7	0.0
11/16	0023	В	0	-	8.1	23 6 23.0	36. 62	0.93	-	0.2	0.1	0.8	0.2
12/11	1401	S	P	_	U . L	19.7	35.84	0.02	_	0.1	0.2	2.3	0.0
12/11	1401	В	0		_	19.4	36. 12	0.04		1.4	0.8	0.7	0.9
1957													
1/10	1040	S	P	•	**	19.1	35.92	0.07		0.1	0.4	3.4	0.8
- 17	/	В	0			19.1	35.94	0.11		0.2	0.4	2.0	0.9
2/6	1226	S	0	-	8.0	21.2	36.06	_	0.8	0.8	0.3	0.5	1.0
		В	P	**	8.1	20.4	35.98	0.28		0.5	0.2	0.5	0.5
1954	STATIO	ON A	. 48	Dep	th of	3 feet	27° 1	0.5' N	_	82, 5	9.9' W	-	
3/30	1623	S	P	_	86	26.3	34.12						
5/4	1340	S	P	-	400	28.5	34.42						
7/23	1115	S	0	-	-	30.9	33.80						
8/10	1523	S	P	800	-	31.8	34.85						
8/17	1525	S	0	-	-	32.1	34.40						
9/15	1200	S	-	5	-	29.5	34.94						
10/5	1210	S	0	eso.		28.5	33.33						
12/22	1435	S	0	-	-	16.6	33.58						
1955 5/5	1158	S	0	_	_	26.8	36.38						
5/11	1335	S	0	_	_	28.5	36.29						
5/25	1135	S	0	-	-	29.6	36.59						
6/1	1440	S	0	-	-	31.3							
6/14	1416	S	0		-	30.8							
6/29	1532	S	0	-	-	33.8	37.01						

Date	Time	S or	G. b	reve	рН	°C	Sal.	Cu.		PO ₄	NO-3	Car	Pro.
			C.	M.					In.	Tot.	NO	Oar.	110.
7/11	1904	S	0	-	-	29.2	36.04						
7/21	1100	S	0	-	-	30.2							
7/27	1030	S	0	-	-	30.6	36.35						
8/11	1035	S	0	-	-	30.0	35.84						
8/24	1046	S	P	440	-	31.5	35.84						
8/30	1300	S	0	879	-	30.3	35.99						
9/8	1625	S	0	-	-	31.1	35.48						
9/27	1555	S	0	-	-	31.0	35.21						
10/6	1040	S	0	-	_	29.5	35.28						
11/1 11/16	1524	S	0	-	-	23.4	35.25						
11/10	1000 1028	S S	0	-	-	22.0	35.44						
12/18	0845	S	0	-	***	17.8 20.3	35.93						
12/18	0915	S	0	_	-	18.0	28.96 35.43						
1956	0/13	5	U	_	-	10.0	JJ. 1 J						
1/5	1440	S	0	0:1	444	16.0	35.61						
1/11	1138	S	0	-	-	13.0	34.83						
1/31	1320	S	0	-	-	17.7	35.34						
2/8	1408	S	0	-	-	19.0	35.31						
4/12	1202	S	0	-	••	19.8	36.55						
5/9	1715	S	0	-	-	27.5	36.82						
1954	STATIC	ON A	49	Dep	th of	6 feet	27° 1	0.81 N	<u></u>	82° 2	9.61 W		
3/30	1612	S	P	-	_	28.1	33.24						
5/4	1335	S	0	-	-	29.1							
6/10	1752	S	0	-	-	32.5	32.65						
8/17	1538	S	0	-	***	32.1	30.90						
12/22	1725	S	0	-	-	14.0	31.76						
1955	1700	c	0			24 0	24 22						
3/1 4/5	1700 1105	S S	0	-	-	24.0 24.0	34.22						
4/28	1147	S	0	_		24.8	36.36						
5/5	1215	S	0			25.9	36.96						
6/1	1427	S	0	-	-	29.8	50.70						
1956													
	1500	S	0	-	-	16.0							
1/17	1440	S	0	ent	-		34.67						
1954	STATIC	N A	50	Dep	th of	26 feet	27° (9' N		82°3	0.5' W		
	0935	S	P	me	-	18.2	34.58						
6/11	0735	S	P	-	_	27.9							
9/13	1530	S	-	12	-	28.6	34.94						
		В	-	2		28.9	34.90						
1955 8/2	1 5 25	S	0	one	-	29.7	36.06						
-,-		В	0	-	-	29.2	36.06						
		_											

Date	Time	S or B	G.	breve M.	рН	°C	Sal.	Cu.	In.	PO ₄	NO-3 NO ₂	Car.	Pro.
8/30	1415	S	0	-	•	30.5	36.15						
		В	0	-	-	30.1	36.09						
9/12	1646	S	0	-	-	29.7	34.38						
		В	0	-	-	29.6	34.87						
9/27	1605	S	0	-	-	29.7	35.19						
		В	0	648	-	29.2	35.23						
11/1	1658	S	0	-	-	23.0	35.30						
		В	0		0.00	23.0	35.26						

	STATIO	ON B	1	Dept	th of	3 feet	27° 1	5.21 N	ſ	81°	52.61 7	V	
		S							P	0,	NO-		
Date	Time	or	G.	breve	pH	°C	Sal.	Cu.		4	NO ³	Car.	Pro.
		В	C.	М.					In.	Tot.	2		
1955													
3/25	1415	S	0		7.8	23.5	0.00	0.33					
1956													
4/12	1545	S	0	0-0	7.8	21.5	0.10	0.07	0.6	1.0			
5/11	0930	S	0	•	7.9	25.7	0.40	0.26					
6/6	1605	S	0	-	•	31.2	0.10	0.01	tel	28.4			
8/30	1452	S	0	000	7.6		0.10	0.07	pas	-	0.5		
10/29	1515	S	0	0.0	8.4	24.0	0.10	0.07	000	25.5	1.5	-	8.3
11/16	1130	S	0	***		20.0	0.20	0.21		25.0	0.6	0-0	4.9
12/10 1957	1520	S	0	2	0~4	20.7	0.20	0.02	•	-	1.2	5.3	2.6
1/8	1415	S	0	-	8.3	19.5	0.40	0.05	16.7	-	•	9.0	2.3
2/7	1400	S	0	0:0	8.4	24.1	0.20	0.00		_	**	6.3	
3/28	1430	S	0	-	7.1	22.1	0.20			23.5	12.0	6.9	
4/11	1445	S	0	non.	7.6	24.3	0.20	0.11			11.0	3.5	8.6
	STATIC	ON B	2	Dept	th of	8 feet	27°0	21 N		82°	16.5' V	V	
1955	1/00	-			7 4	24.7	5 07	0 20					
3/25	1600	S	0	-	7.4	24.7	5.97	0.20					
6/8	1650	S	0	-	-	30.5	18.25	0.20		2 0			
6/29	0948	S	0	-	-	33.3	11.44	0.07	1. /	2.0			
7/21	1156	S	0	_	-	29.3	11.44	0.03					
7/27	1130	S	0	0-0	000	31.4	8.86	0.26					
8/24	1158	S	0	0-0	040	32.4	0.25	0.65		- 0			
9/8	1715	S	0	-	-	28.4	0.20	0.15	bes /	5.9	2 /	20 /	22.2
9/27	1344	S	0	0.00	bate	29.4	0.14	0.07		9.6	2.6	13.6	22.3
10/6	1145	S	0	•	-	29.0	0.10	-	-	7.5			
11/16	1120	S	0	_		24.0	7.20	0.09					
11/30	1120	S	0	_	7.9	16.7	5.46	0.10		2 0		2 1	0 4
12/8	1145	S	0	6≠4	7.6	22.8	11.98	0.09	2.2	3.0	-	2.1	0.4
12/29 1956	1145	S	0	0-0	7.6	20.0	12.21	0.16					
1/5	1450	S	0	0-0	7.7	16.5	12.94	0.19					
	1230		0	0-0			14.58						
1/25	1700	S	0	one.	7.4	16.0	16.95	0.05					
1/31	1040	S	0	the contract of the contract o	0=0	21.3	16.84	0.05	3.8	4.7	-	2.2	8.7
3/8	1400	S	0	-	848	25.7	15.81	0.08	_	-	844	5.1	
4/12	1355	S	0	_	7.9	20.8	19.46	0.05		5.4	_	2.7	9.6
5/9	1620	S	0	best .	7.9	28.0	23.41	0.07		7.4	0.2		2.0
6/7	1405	S	0	000	8.3	29.2	34.72	0.02		6.0	0.0	2.8	1.3
7/12	1535	S	0	-	7.7	30.5	21.07	0.08		5.5	0.4	3.3	1.6
8/30	1549	S	0	-	7.2	-	0.70	0.05	**	12.4	2.3	6.1	3.4
10/29	1610	S	0	•	8.6	25.0	0.60	0.02	6.5	7.6	4.0	0=0	6.2
11/16	1345	S	0		-	23.3	12.31	0.33	2.9	3.2	6.3	2.7	2.4
12/10	1700	S	0		~	22.7	6.19	0.01	2.7	6.2	•	3.5	5.0

Date	Time	S		breve	nu.	°C	Sal.	Cu.	P	04	NO-3	Car.	Pro
Date	Time	or B	G.	M.	рп	C	JaI.	Ou.	In.	Tot.	NO ₂	Oar.	110.
1957													
1/8	1750	S	0	-	8.0	22.2	12.60	0.43			0.3	3.9	5.0
2/7	1545	S	0	-	7.9	26.4	16.57	0.00			0.2	3.4	4.5
3/28	1630	S	0	-	8.1	25.5	0.70	0.00			3.3	6.4	9.4
4/11	1715	S	0	-	7.6	25.5	0.60			8.9	3.7	3.8	8.0
6/19	1845	S	Ü	64	7.3	30.7	0.30	0.56	-	5.0		*	
1955	STATIO	ON B	3	Dept	th of	3 feet	26° 56	o N		82 0	3.31 W	/	
3/25	1537	S	0	-	8.0	25.0	23.95	0.72					
6/8	1612	S	0	-	_	30.2	26.97	0.30					
6/29	1734	S	0	-	-	29.5	-	0.04					
7/21	1430	S	0	-	-	29.8	24.47	0.04					
7/27	1325	S	0	-	-	33.3	20.53	0.60					
8/11	1412	S	0	-	-	32.2	21.33	0.16					
8/16	1306	S	0	-	-	31.7	21.27	0.25					
8/24	1415	S	0	-	-	32.0	15.46	0.19					
9/8	1825	S	0	~	-	28.2	8.50	0.04		24.4		/ 0	
9/27	1310	S	0	-	~	30.0	4.78			21.4	2.9	6. 3	12.5
10/6	1430	S	0	-	-	32.5	18.06	0.03			2 7	2 2	r 2
11/1	1220	S	0	-	-	26.0	22.25		8. 7	11.1	2.7	3.2	5.2
11/16	1345	S	0	-	7.8	24.8	22.71	0.07					
11/30	1320	S S	0	-	7.6	18.1	15.53	0.15		7.2		3.9	
12/8 12/29	1330 1210	S	0	049	8.0	23.9 19.4	20.37	0.13	-	1 . 4	_	3, 7	
1956	1210	٥	U	-	0. 0	17.4	20.31	0.10					
1/5	1525	S	0	_	7.6	15.0	20.23	0.12					
1/11	1350	S	0	_	7.7	13.5	26.49	0.25					
1/25	1725	S	0	_	7.8	15.2	25.87	0.07					
1/31	1005	S	0	_	-	20.5	20.51	0.06	26.6	32.4	-	0.8	7.0
3/8	1430	S	0	-	-	25.5	25.98	0.03	0.0	0.9	-	7.2	11.7
4/12	1435	S	0	-	7.9	21.9	26.92	0.08					
5/9	1402	S	0	-	-	27.5	23.12	0.12		33.7	0.3	3.5	2.6
6/6	1655	S	0	-	-	30.3	28.35			26.8	-	•	1.2
6/7	1210	S	0		8.3	29.8	27.75			27.0	0.1	2.4	1.0
7/12	1620	S	0	-	8.1	31.3	21.84			28.1	0.4	2.8	1.6
8/30	1625	S	0	-	7.6	-	10.09	0.00			2.8	3.6	2.9
10/29		S	0	-	8.6	25.7	15.78	0.06		15.8	2.5	4.0	3.6
11/16		S	0	_	-	22.2	20.95			19.2	3.6	1.9	2.7
12/10 1957	1630	S	0	-	-	24.1	19.01	0.02	-	-	2.1	1.6	1.3
1/8	1630	S	0	-	7.7	21.8	22.60	0.01		20.1	4.2	2.6	2.5
2/7	1500	S	0	-	7.9	25.0 25.1	26.04	0.30		13.1 19.9	2.6 4.8	1.2	2.3 4.5
3/28 4/11	1545 1630	S S	0	-	7.7 7.9	26.2	11.76 13.85			21.8	3.2	2.6	4.1
4/25		S	0	_		26.0	14.49	0.05				2,0	
5/23		S	0	-	-	31.5	6.36	0.35					
6/5	1326	S	0	-	-	33.2	7.97	0.02					
6/19	1910	S	0	-	7.8	31.7	15.85	0.24	-	14.9			

	STATIO	ON B	4	Dep	th of	3 feet	27° 0	6.81 N	1	82°	26.81 W	r	
		S							P	0	NO ₃ -		
Date	Time	or	G. 1	breve	рН	°C	Sal.	Cu.		4		Car.	Pro.
		В	C.	M.					In.	Tot.	NO ₂	Our !	110.
1954	1500	C	-			20.0	22 75						
2/5	1500	S	P	-	_	20.0	32.75						
2/19	1635	S	0	_	_	24.2							
3/10	1407	S	0	-	-	18.0	32.21						
3/30	1655	S	0	-	-	29.6	32.64						
5/4	1445	S	P	***	-	29.2	32.18						
5/11	1500	S	0	-	-	-	32.72						
7/23	1035	S	0	-	-	31.2	15. 14						
8/17	1438	S	0	010	-	32.1	31.26						
9/15	1230	S	0	948	-	29.6	32.81						
10/5	1118	S	0	-	-	29.0	13.57						
11/6	0830	S	P	~	-	18.8	31.26						
12/22 1955	1350	S	0	-	-	15.8	23.31						
2/1	0840	S	0		_	14.6	30.88						
3/1	1625	S	0	-	-	24.0	31.85						
5/5	1143	S	0	-	_	28.0	35.95						
5/11	1303	S	0	_	_	29.1	36.15						
5/25	1200	S	0		_	30.0	36.24						
6/1	1509	S	0	***	_	31.0							
6/14	1500	S	0			31.4	36.68						
6/29	1605	S	0	-	→	33.8	37.36						
7/11	1946	S	0	•	-	30.0	33.31						
7/21	1141	S	0	-	-	29.2	32.70						
7/27	1100	S	0	-		33.3	27.29						
8/2	1645	S	0	-	-		27.47						
8/11	1055	S	0	_	_	31.1	21.78						
8/16	1510	S	0	_	•	33.3	28.62						
8/24	1130	S	0	_	_	32.0	31.67						
8/30	1400	S	0	_	-	32.0	33.15						
9/8	1655	S	0	_	_	31.9	9.02						
9/20	1555	S	0	-	-	31.0	28.10						
9/27	1525	S	0	_	-	31.7	24.13						
10/6	1115	S	0	_	-	29.2	29.90						
11/1	1500	S	0	-	_	24.0	34.18						
11/16	1055	S	0	_	_	23.5	34.83						
11/30	1055	S	0	_	-	16.1	35.17						
12/29	1000	S	0	_	**	18.8	33.15						
1956													
1/5	1525	S	0	-	•	16.0	35.16						
1/11	1207	S	0		-	13.0	35.32						
1/25	1545	S	0	-		15.5	32.57						
1/31	1255	S	0	mo	***	19.5	35.78						
2/8 3/8	1435 1245	S S	0	-	**	21.5 25.0	34.35 35.66						
4/12	1231	S	0	-	-	20.8	36.63						
7/13	0940	S	0	-	-	-	33.39						
1957		_	_			20 0							
5/9	1645	S	0	-	-	28.3	36.30						

•	STATIC	ON B	5	Dept	h of	9 feet	27 * 06	6.61 N	82°	281 W		
		S							PO.	NO-		
Date	Time	07	C	breve	pH	°C	Sal.	Cu.	1 04	NO3-	Car.	D-0
Dale	A Adda C	В	C.	M.	2	0	Var.	I.	Tot.	NO	04.	2 - 01
1954												
2/5	1435	S	P	_	-	19.2	34.56					
3/10	1355	S	0	-	-	16.8	33.58					
4/14	1705	S	P	-	-	28.6	34.39					
5/4	1435	S	P	-	-	29.0	34.18					
6/10	1700	S	P	-	-	29.2	34.87					
		В	P	-	-	29.3	34.81					
6/11	0715	S	P	-	-	28.3	34.96					
6/29	1512	S	0	-	-	31.8	34,38					
5/11	1535	S	P	-	-	29.0	35, 12					
7/23	1055	S	0	-	-	30.9	23.84					
8/11	1703	S	P	un	-	33.3	29.69					
8/12	0605	S	P	-	-	30.6	34.87					
8/17	1505	S	P	-	-	31.8	34.31					
9/13	1510	S	-	12	-	28.2	34.63					
		В	0	-	-	28.0	34.92					
9/15	1215	S	0	-	-	29.1	34.83					
10/5	1146	S	0	-	-	28.7	18.93					
11/6	1605	S	P	-	-	19.3	34.11					
12/22	1407	S	0	-	•	16.1	33.86					
1955												
2/17	1603	S	0	-	-	15.3	34.78					
3/1	1640	S	0	-	-	21.5	35.41					
5/6	1145	S	0	-	-	26.2	36.44					
5/11	1318	S	0	-	-	26.3	36.24					
5/25	1145	S	0	-	-	29.3	36.15					
6/1	1454	S	0	-	-	30.4						
6/8	1838	S	0	-	-	30.0	36.92					
6/14	1434	S	0	un.	-	29.8	37.16					
6/29	1550	S	0	-	-	32.1	37.16					
7/11	1925	S	0	un	-	29.9	36.33					
7/21	1116	S	0	-	-	29.5	36.70					
7/27	1045	S	0	-	-	30.0	35.30					
8/2	1655	S	0	-	-	-	35.08					
8/11	1112	S	0	-	-	31.1	26.40					
8/16	1527	S	0	-	-	32.2	35.35					
8/24	1103	S	0	-	-	31.8	35.14					
8/30	1320	S	0	-	-	30.5	35.91					
9/5	1640	S	0	-	-	30.8	35,66					
9/20	1600	S	0	-	-	31.0	33.95					
9/27	1544	S	0	-	-	31.0	31.83					
10/6	1100	S	0	-	-	29.6	33.77					
11/1	1516	S	0	-	-	23.5	35.33					
11/16	1015	S	0		-	22.1	35.44					

		S							PO_4		NO ₃ -		
Date	Time	or	G.	breve	рН	°C	Sal.	Cu.	4			Car.	Pro.
		В	C.	M.					In. T	ot.	NO ₂		
11/30	1042	S	0	_	-	18.7	35.77						
12/29	0950	S	0	•		18.0	35.34						
1956													
1/5	1515	S	0	-	-	15.7	35.67						
1/11	1150	S	0	••	-	13.5	34.88						
1/25	1520	S	0	-	-	13.0	35.25						
1/31	1306	S	0	-	-	18.0	35.63						
2/8	1425	S	0	-	-	19.6	35.76						
2/8	1235	S	0		•••	23.0	36.17						
4/12	1221	S	0	-	-	20.5	36.47						
5/9	1700	S	0	-	-	27.5	36.10						
6/12	0915	S	0	•	-	27.7	37.35						
7/13	1000	S	0	-	-	25.2	37.35						
10/25 1957	1528	S	0	-	-	25.2	36.22						
5/23	1159	S	P	010	**	30.6	27.92						
·	STATIC			Denti		64 feet	27° 0	M 10	9.5) a :	39.81 W	7	
1955	DIATIC			Depti	1 01	OA IEEL	21 0	0 11	- 02		37. G W	_	
6/29	1320	S	0	010	-	30.2	36.45						
		В	0	-		29.5	36.58						
8/17	1035	S	0	-	••	29.7	36.33						
105/		В	0	***	•••	30.0	36.31						
1956 1/31	1430	S	0	-	_	17.6	36.42						
1/31	1150	В	0	-	_	17.7	36.45						
3/15	1406	S	0			23.2	36.62						
3,13	1100	В	0			22.0	36.43						
5/14	1156	S	0	-	_	27.0	36.73						
-, -		В	0	-	_	26.0	36.82						
6/13	0852	S	0	••	-	27.0	36.89						
·		В	0	_		27.0	36.86						
9/13	1243	S	0		-	27.5	36.56						
		В	Ω	640	***	28.0							
11/16	0934	S	0			23.0	36.81						
		В	0	•		22.5	36.73						
12/11	1311	S	0	-	-	21.0	36.34						
1957		В	0	-	•	20.5	36.44						
1/10	1125	S	0	-	040	20.0	36.14						
		В	0	04	•	19.5	36.21						
2/6	1312	S	0	-	_	21.5	36.01						
		В	0	•	-	19.3	36.12						

Dat

1954

8

2		STATIO	ON E	3 7	Dep	th of	44 feet	27° 0	51 N			34.5° V	V	
	Date	Time	S	G.	breve	рН	°C	Sal.	Cu.	P	04	NO ₃ -	C	D
_			В	C.	M.	P11				In.	Tot.	NO ₂	Car.	Pro.
]	.954 6/11	0928	S	Р	_	**	28.4	35.05						
			В	0		***	27.3	35.48						
	6/30	0918	S	P	-	-	30.0	35.39						
	- 4	- 4 - 4	В	0	-	-	29.1	35.28						
	8/11	1646	S	P	-	-	31.3	34.88						
	0./24	0010	В	0	-		29.7	35.53						
	9/24	0910	S B	- P	8	-	27.9	34.52						
1	955	1250			00	•	28.3	34.87						
	2/15	1359	S	0	-	***	15.1	34.99						
1	956		В	0	-	-	15.2	35.62						
	6/28	1337	S	0	-	7.9	30.1	36.40	0.11					
	7/10	1724	В	0	-	8.0	29.6	36.13	0.41					
	7/18	1734	S B	0	00	7.8 7.9	30.2	36.51	0.07					
	8/4	1016	S	0	00		30.0 28.9	3 6, 42 36, 36	0.02					
	0/1	1010	В	0	_	-	28.9	36.11	0.38					
	8/31	1003	S	0	***	8. 1	30.0	36.36	0.68					
	9/14	1146	S	0	**	-	29.7		0.14	••	0.2			
			В	0	-	-	30.2	36.06	-	••	0.1			
	9/29	1004	S	0	***	7.9	29.5	35.14	0.17	0.3	0.3	2.5	1.2	0.3
			В	0	-	7.9	29.8	34.99	0.14					
]	11/3	1000	S	P	-	7.9	23.3	35.88	0.19					
			В	0		7.9	23.5	35.97	0.17	-	***	-	-	3.3
]	12/7	1237	S	0	-	7.9	20.8	36.08	0.47	0.1	0.1	-	2.3	2.3
1	956		В	0	**	8.0	20.3	35.99	0.20	0.3	0.3	-	••	0.8
	2/2	0930	S	0	-	-	17.6	36.44	•	0.1	-	-	0.6	0.5
			В	0	-	-	17.6	36.28	0.05		0.1	-	~	0.5
	3/14	1248	S	0	-	8.1	22.8	36.48	0.12		0.6	one	0.6	0.7
	- / - /		В	0	***	8.2		36.30			0.2	-		1.8
	5/14	1124	S	0	•	8.2	27.1		0.07			0.1	2.6	0.4
	/ /=	1005	В	0	-	8.2	27.0	36.99	0.10		0.3	0.1	0.6	0.0
	6/7	1205	S	0	-	8.4	27.5	36.95	0.03		0.1	0.0	0.8	0.2
	7/13	1113	B S	0	-	8.4	27.5	36.99	0.03		0.4	0.1	1.0	0.1
	() 13	1113	В	0	-	8.1	30.3 29.5	37.07 36.91	0.09		0.4	0.8 0.3	0.6 0.6	0.0
	7/17	1056	S	0	-	8. 1	30.1	37.31	0.05		0.4	0.4	4.7	0.4
	,	1000	В	0	_	8. 1	30.3	37.40	0.03		0.2	0.3	0.7	0, 1
	9/6	1537	S	0	-	8.3	30.5	36.75	0.13		-	0.6	1.2	0.1
			В	0	_	8.4	30.0	36.86	0.22		0.2	0.9	0.8	0.1
	10/30	1158	S	P	-	8. 1	24.1	36.58	0.04		0.3	0.4	0.4	0.1
			В	0	-	8.1	24.0	36.61	0.18	0.6	0.6	0.2	***	0.0

		S								-	21.0		
Date	Time	or	C	breve	nII	• C	C - 1	C	P	04	NO-		
Date	1 11116	В	C.	M.	рН	°C	Sal.	Cu.		Tot.	NO ₂	Car.	Pro.
11/16	0902	S	0		0 1	21 5	26 27	0 12	In.			-	
11/10	0 70 2	В	0	**	8. 1 8. 2	21.5	36.37 35.93	0.12	***	0.4	0.2	0.9	0.2
12/13	1135	S	-	0.2	O. L	19.8	35. 85		0.2	0.2	0 1		0.1
10,10	1100	M	_	0.3	_	20.0	35. 93	0.03	0.2	0.2	0.1	1. 1	0.1
		В	_	0.2	-	19.9	35.83	0.33		0.3	0 1	7 4	1.3
1957	1010			0, 2	-				0.5		0.1	1. 4	0.9
1/8	1218	S	0	-	**	19.0	36.08	0.15	-	0.1	0.6	0.7	1.1
2/5	1220	В	0	-	_	19.0	36.14	0.10	0.1	0.1	0.3	1.9	1.8
2/5	1239	S	0	-	8.0	22.8	36.00	0.54		0.3	0.3	0.3	0.1
		В	P	-	8. 1	21.5	36.20	0.57	0.0	~	-	0.4	0.4
1954	STATIO	ON B	8	Dept	h of	28 feet	27° (01 N		82° 2	271 W		
6/11	1003	S	P	_	_	29.0	34.87						
		В	0	_	***	28.1	35.07						
8/12	0636	S	P	_	-	30.4	34.97						
		В	0	_	_	29.7	35.16						
9/13	1430	S	0	_	-	29.0	35.14						
1055		В	0	•	_	29.0	35.07						
1955 2/17	1238	S	0	-		16.0	34.65						
2/11	1230	В	0	**	-	15.0	35.17						
8/2	1435	S	0	848	-	30.0	36.26						
٠, -		В	0	-	_	29.7	36.24						
8/30	1326	S	0	-	-	30.5	36.18						
-,		В	0	_	_	30.5	36.18						
9/12	1556	S	0	_	-	30.0	34.45						
		В	0	-	-	29.9	35.05						
9/27	1515	S	0	-	-	29.4	34.33						
		В	0	**	-	29.2	34.67						
11/1	1610	S	0	-	-	23.5	35.39						
		В	0	-	-	23.3	35.44						
	STATIC	N B	9	Dept	h of i	2 feet	27° 0	l' N		82° 2	51 W		
1955 4/5			_										
	1125			-	•		15.79						
4/28 1956	1201	S	0	-	-	25.5	26.42						
1/17	1455	S	0	-	-	19.0	32.53						
2/20	1700	S	0		-	27.5	31.21						
2/21	1158	S	0	des.	-	22.9	27.44						
2/29	1220	S	0	**	_	17.8	27.57						
3/14	1034	S	0	-		25.1	30.86						
3/26	1300	S	0	-	-	19.5	16.91						
4/3	1115	S	0	-	***	23.0	34.64						
4/18	1410	S	0	-	-	22.7	35.86						
4/25	1135	S	0		-	22.9	36.35						
6/26	1425	S	0	-	00	33.0	40.64						

ľ			S								PO_{4}	NO		
	Date	Time	or	G.	breve	рН	°C	Sal.	Cu_ullet		4	NO.	Car.	Pro.
			В	C.	M.	_				In.	Tot.	NO 2		
ľ	7/17	1314	S	0	-	0 +0	32.1	39.63						
	9/12	1012	S	0	-	-	25.6	37.56						
	10/17	1308	S	0	-	-	24.7	34.00						
	11/1	1127	S	0	_	_	24.0	29.68						
	11/7	1135	S	0		***	24.2	27.11						
	11/15	1154	S	0			21.7	30.49						
	12/3	1119	S	0		-	18.6	31.14						
	12/11	1258	S	0	-	-	21.5	33.84						
	12/20	1637	S	0	-	***	25.5	31.98						
	1957	***	~	_			0.1.0	00.05						
	1/15	1030	S	0	•	-	21.2	33.87						
	2/5	1000	S	0	-	•	24.0	33.30						
	2/11	0951	S	0	_	***	24.5	24.91						
	2/20	1155	S	0	-	-	22.5	29.99						
	3/7	1418	S	0	-	-	23.0	11.40						
	3/18	1345	S	0	-	~	24.7	16.39						
	4/8	. 1128	S	0	-	-	26.8	16.69						
	4/22	1526	S	0	-	•	28.5	11.41						
	5/3	0914	S	0	-	-	26.7	1.30						
	5/7	1230	S	0		-	26.2	0.64						
	5/14	1443	S	0	-	-	31.8	13.80						
	5/27	1056	S	0		-	30.7	19.37						
	6/3	1030	S S	0		-	30.3	16.83						
	6/11 6/17	1045 0955	S	0	-	-	30.2	16.62 15.06						
	6/25	1301	S	0	-	_	29.0							
	0/25						-	22.08			000	00 51		
	1954	STATIO	ON E	3 10	Dep	th of	42 feet	26	57.51	N	820	29.51	W	
	4/30	1130	S	P	_	_	29.4	35.08						
			В	P	₩	-	26.1	34.67						
	6/10	1615	S	P	_	_	28.9	34.70						
			В	0	649	_	27.7	35.46						
	9/24	0955	S	P	-	-	28.3							
	1955		В	0	Per .	-	28.3	34.29						
	2/15	1326	S	0	_	_	15.2	33.37						
	2,13	1320	В	0	_	_	15.3	35.62						
	6/8	1741	S	0		_	28.5	36, 51						
	0,0		В	0	_	-	27.3	36.55						
	7/18	1652	S	0	-	_	30.6	36.38						
	. , 10	2000	В	0	-	-	30.0	36.42						
	8/16	1457	S	0	_	_	30.6	36.29						
			В	0	-		30.0	36.31						
	8/31	1045	S	0	_	_	30.3	36.47						
			В	P		000	30.3	36.38						
							-							

	STATIC	ON B	10 (Cont'd	.)								
		S							P	0	NO-		
Date	Time	or	G.	breve	рΗ	°C	Sal.	Cu.		4	3	Car.	Pro.
		В	C.	М.					In.	Tot.	NO ₂		
9/14	1130	S	0	-	_	30.0	34.72						
,,,,,		В	0		-	30.2	35.62						
9/29	1048	S	0	-		29.8	34.83						
/ 1 - /		В	0	_	_	29.9	34.99						
11/3	1034	S	0		_	23.5	35.86						
	1031	В	0	~	_	23.5	35.81						
1956			Ů	_	_								
2/2	1019	S	0	-	**	17.6	36.35						
		В	0	***	-	17.5	36.31						
3/14	1209	S	0	~		22.9	36.18						
		В	0	-		23.0	36.27						
5/9	1221	S	0	-		26.2	36.49						
		В	0	-	-	26.1	36.99						
6/7	1128	S	0	-	-	27.8	37.06						
		В	0	-	-	27.7	37.22						
10/30	1121	S	0		-	24.6	36.59						
		В	0	-	-	24.1	36.58						
11/16	1012	S	0	-	_	22.2	36.73						
		В	0	-		22.0	36.54						
12/13	1213	S	-	0.3	~	20.0	35.67						
		В		0.2	-	20.0	35.83						
1957	1141												
1/8	1141	S	0	-	_	19.0	36.00						
2/5	1155	В	0	_	-	19.0	36.00						
2/5	1155	S	0	-	-	21.8	36.10						
		В	0	•	-	20.9	36.10						
	STATIO	ON B	11	Dep	th of	7 feet	26° 5	5.8' N		82°	21.3' W	_	
1954	1608	S	P			21.2	33.93						
2/5 3/10	1455	S	0	~		20.0	33.91						
4/30	1530	S	P	-	_	29.2	33.66						
6/24	1455	S	P	-	-	33.0	34.43						
7/23	0940	S	0	•••	•	30.7	32.66						
		S	0	-	***	32.3	32.47						
	1332			-	~								
10/5	0955	S	0	-	-	27.8	28.28						
12/22 1955	1310	S	0	-	-	16.8	31.13						
3/1	1550	S	0	_	849	22.7	35.32						
3/25	1628	S	0	-	7.2	23.8	35.39	0.19					
5/5	1003	S	0	-	_	24.9	36.76	/					
5/11	1135	S	0	ças.	_	28.1	36.49						
5/25	1338	S	0			30.5	36.50						
6/1	1622	S	0	_	_	28.8	50.50						
6/8	1717	S	0	_	-	30.2	37.27	0.20					
6/14	1555	S	0	_	_	30.4	37.18	0,20					
7/21	1354	S	0	_	_	30.0	35.73	0.03					
1/41	1001				_	5010		-,					

Date	Time	S	G h	reve	рН	°C	Sal.	Cu.	P	04	NO ₃ -	Car.	Pro.
Date	Time	В	C.	M.	PII	O	oar.	_	In.	Tot.	NO	Oar,	110.
7/27	1253	S	0	_	-	32.5	35.23	0.19					
8/11	1225	S	0	_	_	31.1	35.75	0.08					
8/16	1410	S	0	-	-	31.1	35.97	0.04					
8/24	1340	S	0	~	_	32.5	36.29	0.20					
9/8	1800	S	0		-	29.0	27.75	0.10	_	1.3			
9/27	1450	S	0	-	~	30.4	33.60	0.11	1.0	1.5	1.4	1.0	1.9
10/6	1325	S	0	-	-	31.0	33.93	0.07	-	1.2			
11/1	1445	S	0		-	23.8	35.23	0.13	0.3	1.9	1.6	4.5	5.5
11/16	1315	S	0	-	-	24.5	35.44	0.07					
12/8	1220	S	0	-	7.8	23.2	35.46	0.10	0.7	0.9	-	2.0	3.0
1956													
1/25	1540	S	0	***	8.2	15.0	35.27	0.10					
1/3	1136	S	0	-	000	20.2	35.42	0.05	-	1.5	-	1.3	
3/8	1345	S	0	848	_	25.5	36.45	0.08	5.5	6.3	-	4.6	
4/12	1335	S	0	-	7.9	20.9	38.03	0.02	4.3	5.6	-	0.5	0 0
5/9	1600	S	0	-	8.0	27.8	38.10	0.13	- 0	1.1	-	2.2	0.2
6/7	1250	S	0	_	8.1	29.2	37.88	0.06	0.8	2.2	1.7	1.6	0.1
7/13	0855	S	0	-	8.4		37.24	0.04	0.7	3.4	0.4	1.8	0.6
7/30	1425	S	0		-	30.0	38.33	0.03					
8/27	1344	S	0	-	-	32.0	38.38	0.03					
9/4	0957	S	0	-	-	28.5	37.73	0.01		7 2	0 0	2 2	0 0
9/10	0950	S	0		_	25.7	37.28	0.02	4.4	7.2	0.9	2.2	0.0
9/24	1113	S	0	_	-	28.5	36.07	0.06					
10/8	1017	S	0	-	~	27.5	36.37	0.02					
10/17	1319	S	0	-	-	24.2	36.71	0.09					
10/25	1200	S	0	-	-0	26.0	36.65	0.08	0 0		0.1	1.7	0.1
10/30	1227	S S	0	_	0 2	23.5	36.47	0.17	0.8	1.1	0.5	0.8	0.1
11/14	1000	S	0		8.2	19.6	37.39 36.75	0.21	-	1. 1	0.5	0,0	0.5
12/3 12/11	1132	S	0	_	-	18.0 22.0	36. 53	0.10	-	1.2	3.0	2.6	0.4
12/11	1411	S	0	-	-	22.0	35.84	0.03	-	1. 2	5.0	2.0	0.1
1957	1645	٥	U	-	-	66.0	33.04	0.05					
1/10	1130	S	0	_	-	21.2	36.52	0.16	0.4	0.7	0.9	2.7	0.8
1/28	1308	S	0	-	-	23.0	36.27	0.69					
2/5	1552	S	0	_	**	25.5	36.50	0.05	0.6	1.6	0.2	0.9	0.6
2/26	1038	S	0	_		21.5	35.62	0.04					
3/28	1034	S	0	946		20.8	34.83	0.06	0.6	1.4	2.3	2.3	8.6
4/12	1229	S	P	_	-	26.0	33.98	0.08	0.8	1.5	1. 2	0.4	0.9
4/25	1211	S	0	_	-	26.0	33.47	0.08					
5/27	1105	S	0	-	-	30.0	35.04	0.46					
6/3	1038	S	0	-	-	29.2	34.53	0.03					
6/11	1055	S	0	-	-	29.7	33.67	0.23					
6/17	1005	S	0	-	-	29.0	33.90	0.26					

	m.	S	<i>C</i> 1		- 11	° C	Col	Cu.	P	004	NO-3		
Date	Time	or B	C.	M.	pН	°C	Sal.	Cu.	In.	Tot.	NO ₂	Car.	Pro.
1954													
2/5	1550	S	P	-	_	19.0	34.65						
3/10	1445	S	0	0-0	-	19.2	33.84						
6/24	1435	S	P	-	-	31.2	34.72						
7/23	0900	S	0	-	010	29.8	33.35						
8/17	1315	S	P	-		32.4	33.82						
10/5	0935	S	P	-	-	28.0	33.01						
12/22	1250	S	0	_		15.8	33.95						
1955 5/6	1020	S	0	_	_	25.8	36.36						
5/12	1153	S	0		_	28.1	36.45						
5/25	1325	S	0	_	-	30.8	36.57						
6/1	1600	S	0	_	-	30.5							
6/14	1535	S	0	-	_	30.5	36.99						
6/29	1638	S	0	_	-	33.0	37.00						
7/21	1237	S	0	-	-	30.5	36.22						
7/27	1200	S	0	-	-	32.2	36.18						
8/11	1205	S	P	-	-	30.6	36.15						
8/16	1425	S	0	-	640	30.6	36.15						
8/24	1312	S	0	-	-	31.8	36.38						
8/30	1445	S	0	-	-	31.2	36.02						
9/8	1745	S	0	-	_	29.0	33.31						
9/27	1425	S	0	-	-	30.8	34.23						
10/6	1215	S	0	-	-	30.2	34.56						
11/1	1400	S	0	od		23.9	35.01						
11/16	1155	S	0	***	-	23.7	35.35						
11/30	1225	S	0	-	-	19.4	35.84						
12/29	1035	S	0	-	-	19.5	35.41						
1956 1/5	1605	S	0	_	-	16.0	35.58						
1/11	1300	S	0	_	and.	13.5	35.32						
1/25	1610	S	0	_	-	13.0	35.50						
1/31		S	0	_	-	17.5	35.27						
2/8	1532	S	0	-	-	21.3	35.35						
3/8	1320	S	0	_	-	24.5	36.42						
4/10	1320	S	0	-	-	21.3	36.62						
5/9	1545	S	0	-	-	27.0	37.44						
1054	STATI	ON I	3 13	Dep	oth of	39 feet	26° 5	3.31	N	82°	261 W		
1954 4/30	1225	S	P	-	840	27.0	34.34						
		В	0	-	-	25.8	34.63						
12/16	1231	S	P	-	-	17.5	35.08						
		В	0	-	-	17.6	35.14						
1955 7/18	1625	S	0	***		30.8	36.47						
,		В	0	-	-	29.8	36.47						

~	Date	Time	S	G. 1	breve	рН	°C	Sal.	Cu.	P	04	NO ₃ -	Car.	Pro
			В	C.	M.	1				In.	Tot.	NO ₂	Our.	110.
	7/20	1615	S	0	_	-	30.0	36.20						
			В	0	-	-	29.9	36.33						
	8/16	1424	S	0	-	-	30.0	36.56						
			В	0		-	30.0	36.55						
	12/7	1130	S	0	-	7.9	20.8	36.07	0.19		0.6	-	0.1	5.4
	1956		В	0	-	8.0	20.2	36.07	0.30	0.4	0.6	546	3.1	0.9
	5/9	1156	S	0	-	8.2	26.1	36.85	0.48	0.1	1.1	0.2	2.3	0.0
			В	0	_	8.2	26.3	36.92	0.41	0.0	0.1	0.1	0.9	0.0
	6/7	1104	S	0	-	8.2	27.9	37.25	0.03	0.3	0.5	0.0	1.1	0.0
			В	0	-	8.2	27.6	37.22	0.05	0.4	0.8	0.0	2.1	0.0
	7/13	1000	S	0	***	8.0	29.6	36.90	0.06	-	0.5	0.3	0.6	0.1
	0.17	1405	В	0	-	8.1	29.5	36.90	0.06		0.4	0.4	0.3	0.1
	9/6	1435	S	0	-	8.2	31.2	36.90	0.02		•••	0.2	0.9	0.0
	10/20	1057	В	0	000	8.2	30.0	37.05	0.04		1.3	0.1	1.5	0.7
	10/30	1057	S	0	-	8. 1	24.3	36.55	0.13		0.1	0.8	0.6	0.0
	11/16	1035	B S	0 P	-	8.2	24. 1 23. 0	36.55 36.69	0.32	0.2	0.3	0.4	1.1	0.0
	11/10	1033	В	0	_	8.2	22.6	36.80	0.17	0.0	0.3	1.6 0.0	3.7	0.1
	12/13	1243	S	•••	0.2	₩ E	20.0	35.83	0.17	0.6	0.9	0.5	0.9	0.7
	12/13	1015	M	—	0.2	-	20.1	35.94	0.04	0.3	0.5	0.6	1.3	0.9
	1957		В	P	_	_	19.9	35.80	0.07		0.5	0.3	1. 4	0.9
	1/8	1114	S	0	_	***	18.6	35.96	0.00	0.2	0.6	0.4	6.2	0.3
	·		В	0	_		19.0	36.24	-	0.3	0.7	0.4	3.0	0.6
	2/5	1128	S	0	-	8.1	21.8	35.9	0.43	0.1	0.3	0.3	1.1	0.6
			M	0		8.1	21.7	36.10	0.29	0.0	0.3	0.4	1.1	0.4
			В	0	-	8.1	21.0	36.40	0.39	0.7	0.9	0.3	0.1	0.6
		STATIO	ON B	14	Dep	th of	5 feet	26° 5	3.81 N	_	82°	20.41	N	
	1954 4/30 1955 4/5	0950	S	P	_	_	27.3	34.58						
	1955 4/5	1150	S	0	_	-	21.9	35.73						
	4/28	1246	S	0	-	-	26.3	36.32						
	1956	1510	S	0			14.0	35.26						
	1/17 2/14	1510 1231	S	0		-	18.4	35. 65						
	2/20	1720	S	0	_	_	23.2	35.72						
	2/21	1335	S	0	94	-	22.8	35.77						
	2/29	1230	S	0	***	_	19.5	36.17						
	3/14	1046	S	0	-	_	24.5	36.36						
	3/26	1355	S	0	948	040	19.8	36.77						
	4/3	1200	S	0	-	-	22.0	36.83						
	4/15	1415	S	0	-	-	22.8	36.88						
	4/25	1150	S	0	***	-	22.6	36.50						
	6/26	1435	S	0	948	-	30.1	37.56						
	7/17	1327	S	0	**	-	31.9	37.20						

	JIAIN	S							F	0,4	NO-3		
Date	Time	or	G. b		pН	°C	Sal.	Cu.			NO ₂	Car.	Pro.
		В	С.	М.					In.	Tot.	2		
7/30	1430	S	0	-	-	30.5	37.84						
8/6	0950	S	0	-	-	31.5	37.64						
8/13	1139	S	0	-	-	30.5	37.53						
8/27	1350	S	0	-	-	31.3	37.40						
9/4	1004	S	0	-	-	29.5	37.51						
9/24	1120	S	P	040	-	27.6	36.37						
10/2	1250	S	0	_	_	27.4	36.26						
10/8	1027	S	0	_	_	27.0	36.33						
10/17	1326	S	0	_	-	24.7	36.51						
10/25	1210	S	0	_	_	24 0	36.20						
11/1	1137	S	0	-	_	24.0	36.37						
11/7	1150	S	0	-	-	23.2	36.76						
11/15	1203	S	0	-	-	21.2	36.59						
11/19	1202	S	0	-	-	21.5	36.52						
11/26	1108	S	0	-	-	19.2	36.12						
12/3	1136	S	P	-	-	18.2	36.03						
12/11	1309	S	0	_	-	21.0	35.65						
12/20 1957	1651	S	0	-	_	21.5	35.66						
1/9	1400	S	0	-	-	19.8	35.77						
1/15	1040	S	0	-	-	20.0	35.94						
1/22	1214	S	0	_	_	19.0	36.00						
1/28	1314	S	0	-	_	21.3	35.87						
2/5	1015	S	0	***	-	23.2	36.08						
2/11	1002	S	P	-	_	23.0	35.89						
2/20	1225	S	0	040	•	21.8	36.08						
2/26	1104	S	P		-	21.2	35.73						
3/7	1427	S	P	***	-	21.3	35.04						
3/12	1119	S	P	-	_	19.5	35.23						
3/18	1358	S	P	-	~	20.7	35.77						
3/28	1329	S	P	010	-	22.3	35.19						
4/8	1148	S	0		-	25.7	34.92						
4/17	1047	S	P	000	-	22.7	35.31						
4/22	1517	S	0		_	26.0	34.78						
5/3	0927	S	0	-	_	26.2	34.28						
5/7	1242	S	0	-	-	26.0	33.92						
5/14	1455	S	0	-	-	28.7	35.17						
5/21	1029	S	0	_		29.7	35.14						
5/27	1112	S	_	0.7	-	30.5	35.26						
6/3	1043	S	P	-	•••	29.5	35.34						
6/11	1100	S	0	_	-	29.7	35.31						
6/17	1019	S	0	•	-	29.5	35.37						
6/25	1315	S	0	-	₩	-	34.29						

Date	Time	S	G. b	reve	рН	°C	Sal.	Cu.	PO	4	NO-3	6	D
Date	1 11110	В	C.	M.	PII	O	Jar.	Ou.	In.	Tot.	NO ₂	Car.	Pro.
1955													
6/28	1240	S	0	**	8.0	30.1	36.38	0.13					
6/29	1412	S	0	-	8.1	30.4	36.49	0.45					
0.11		В	0	-	8.1	29.9	35, 49	0.08					
8/4	1117	S	0	84	-	29.4	36.51	0.50					
0./1.0	1100	В	0	-	-	29.2	36.47	0.31					
8/17	1130	В	0	-			36.49	0.60					
8/31	1111	S	0	-	7.7	30.9	39.70	0.30					
9/14	1201	S	C	***	_	30.3	35.71	0,99	*	0.7			
0.100	1100	В	0	813	_	30.2	36.08	0.18		0.8			
9/29	1122	S	0	-	8.1	29.9	34.22	0.14	0.5	1.0	1.4	4.8	2. ±
22/0	1105	В	0	-	8.1	30.1	-	0.28	-	0.6	0.7		1.5
11/3	1107	S	0	-	8.0	24.2	36.13	0.25					
		В	0	-	8.0	24.2	36.15	0.03					
12/8	1447	S	0	84	8.1	21. 2	35.98	C.13	2.3	3.6	_	0.5	
1956		В	0	-	8.2	21.0	36.14	0.22	04	0.3	-	3.4	
1/31	1334	S	0	_	8.2	19.6	36.14	0.05	0.1	0.2	-	0.8	0.6
		В	0	-	8.2	17.6	36.38	0.05	_	1.0	_	0.0	0.7
3/15	1458	S	P	-	8.2	23.5	36.43	0.00	0.6	0.6	949	1.2	0.5
		В	P	-	8.2	23.4	36.41	0.06	0.3	0.4	-	-	0.4
5/14	1250	S	0	98	8.2	28.5	37.00	0.12	0.0	0.1	0.1	0.1	0.0
		В	0	-	8.2	26.5	36.84	0.18	-	0.5	0.2	1.5	0.0
6/13	1007	S	0	-	8.2	27.4	37.11	0.05	0.1	0.1	0.3	0.8	0.1
		В	0	-	8.2	27.1	37.09	0.08	0.0	0.3	0.4	0.3	0.0
7/17	1218	S	0	-	8.2	29.9	36.89	0.13	0.0	0.3	0.3	1.9	0.1
		В	0	-	8.2	30.1	36.98	0.09	84	0.2	0.2	1.2	0.2
9/13	1331	S	P	-	8.2	28.5	36.76	0.01	0.2	0.2	2.1	0.8	0.0
		В	P	pale	8.2	28.1	36.70	0.03	0.1	0.2	0.2	0.4	0.2
11/16	1053	S	0	-	8.1	23.2	36.80	0.20	0.2	0.2	1.8	1.5	0.0
		В	P	-	8.2	22.6	36.81	0.23	-	0.2	0.0	1.1	0.3
12/11	1221	S	P	-	-	20.0	35.99	0.06	0.1	0.9	0.5	3.5	0.8
1057		В	P	-	-	20.0	36.08	0.02	04	0.8	0.6	1.8	0.7
1957 1/10	1217	S	-	0.2		21.0	36.11	0.02		0.0	1.0	1.2	0.4
-7.20		В	0	-	_	20.0	-	0.02		0.0	0.4	1.8	0.6
2/6	1413	S	0	_	8.0	22.0	35.91	0.70		0.4		0.3	0.0
5/0	1113	В	0	-	8.0	20.9	34.93	0.50		0.6	0.3	0.3	0.4
	an : ===											0.5	Us X
1954	STATIC	DN B	16	Dep	th oi	32 feet	26	52.51 N	4	82	231 W		
4/30	1040	S	P	e=	00		34.72						
		В	P	_		-	34.63						
6/11	1042	S	P	-	•	29.5	34.90						
		В	0	-	04	28.8	34.96						
6/29	1400	S	P		_	31.5	34.33						

		S]	PO ₄	NO-		
Date	Time	or	G. b		pН	°C	Sal.	Cu.			NO	Car.	Pro.
		В	C.	М.					In.	Tot.	2		
8/12	0837	S	P	010	-	30.6	34.63						
		В	0	-	-	30.0	34.99						
9/13	1350	S	0	-	-	29.4	35.28						
		В	0	-	-	29.0	35.61						
9/24	1040	S	-	15	-	28.6	33.35						
		В	0	_	-	28.8	33.93						
1955 2/17	1318	S	0			16.5	34.94						
2/11	1310	В	0	_	_	15.3	35.62						
8/16	1402	S	0	-		30.0	36.36						
0/10	1704	В	0	-	-	30.0	36.38						
8/30	1250	S	0	-	_	30.4	36.13						
0/30	1230	В	0	-	_	30.3	36.11						
9/12	1518	S	0	••	•	30.5	33.64						
7/12	1516	В		-	-								
0/27	1/120	S	0	00		29.9	34.45						
9/27	1439		0	000	00	29.8	33.57						
11/1	1520	B S	0	_		29.7	34.47						
11/1	1528		0	_	-	23.9	35.35						
		В	0	_	-	23.6	35.35						
	STATIC	ON B	17	Dept	th of	5 feet	26° 51	.5' N		82°	18.31	W	
1955 4/5	1450	S	0		_	24.5	35.75						
1956	1400	9	U	_	_	L 1. J	33.13						
1/17	1520	S	0	949	-	16.5	35.65						
2/14	1140	S	0	040		18.8	24.55						
3/14	1055	S	0			26.0	36.86						
3/26	1400	S	0	-	_	19.6	36.66						
4/3	1205	S	0		**	23.0	38.06						
4/18	1425	S	0	-	-	23.2	36.58						
6/26	1440	S	0	_	86.	31.6	38.21						
7/17	1333	S	0	-	-	32.0	38.13						
7/30	1435	S	0	-		32.0	38.65						
8/6	0958	S	0	**	00	-	38.05						
8/13	1145	S	0	**	-	32.5	39.64						
8/27	1357	S	0	-	_	33.1	37.46						
9/4	1012	S	0	04	-	29.1	38.57						
9/13	0815	S	0	-		26.1	36.61						
9/24	1128	S	0		_	28.5	37.06						
10/2	1255	S	0	00	-	29.0	35.04						
10/8	1034	S	0	-	-	27.5	34.98						
10/17	1333	S	0	949		24.7	36.69						
10/25	1218	S	0	-	***	26.7	36.54						
11/1	1145	S	0	***	_	24.3	36.65						
11/7	1156	S	0			23.7	37.65						
11/15	1211	S	0	00		21.3	37.77						
22/23													

		S							I	PO ₄	NO-		
Date	Time	or		reve	рН	°C	Sal.	Cu.			NO	Car.	Pro.
11/10	1207	B	C.	M.			05.00		In.	Tot.	2		
11/19	1207	S	0	-	-	23.2	37.92						
11/26	1102	S	0	-	-	19.0	36.49						
12/3	1142	S	P	•••	-	18.1	36.99						
12/20 1957	1657	S	0	_	-	25.0	36.98						
1/9	1407	S	0	-	**	21.5	34.59						
1/15	1045	S	0	•	_	21.0	37.05						
1/22	1220	S	0	-	•	20.0	36.40						
1/28	1319	S	0	-	-	24.5	36.80						
2/5	1022	S	0	-	-	24.5	36.94						
2/11	1010	S	0	-	-	24.5	36.34						
2/20	1235	S	0	•	**	22.2	36.60						
2/26	1110	S	P	_	•	21.5	32.15						
3/7	1435	S	0	-	-	22.0	32.90						
3/12	1125	S	0	-	-	19.0	32.88						
3/18	1404	S	0	-	-	24.0	35.09						
3/28	1323	S	0	•	-	22.5	34.75						
4/8	1150	S	0	_	-	26.5	35.14						
4/17	1055	S	P	•	-	22.5	35.58						
4/22	1505	S	0	-	-	26.2	30.64						
5/3	0933	S	0	-		27.2	34. 10						
5/7	1248 1506	S S	0	-	-	26.0	34.68						
5/14 5/21	1035	S	0	-	-	32.0 31.0	34.94 35.88						
5/27	1116	S	0	-	_	31.3	35.64						
6/3	1648	S	0	•	_	29.7	34.57						
6/11	1106	S	0	_	_	30.2	30.66						
6/17	1025	S	0	_	_	28.2	29.02						
6/25	1320	S	0	_	_	20.2	31.71						
0/23	STATIO			Dept	h of	34 feet		50.5°	N	82°	21.61	W	
1954									_				
4/30	1325	S B	P P	•	•	27.4 26.2	34. 18 34. 70						
12/16	1146	S	-	350	-	17.1	34.74						
	1140	В	_	300	-	17.1	34.83						
1955 7/20	1640	S	0			30.1	36.35						
1/20	1040	B	0	-	-	30.1	36.42						
8/2	1339	S	0	-	-	30.0	36. 27						
0/2	1337	В	0	-	-	30.0	36.06						
8/16	1345	S	0	_		30.0	36.55						
	1010	В	0	-	-	29.7	36.33						
1956 3/14	1116	S	0		_	23.1	36.24						
3/11	1110	В	0	_	940	23.8	36.08						
5/9	1131	S	0	840	-	27.2	37.22						
		В	Ō	_	•	27.0	37.21						

		S							I	20,	NO		
Date	Time	or	G. b	reve	pН	°C	Sal.	Cu.		4	NO 3	Car.	Pro.
		B	C.	M.					In.	Tot.	2		
6/7	1037	S	0	-	-	28.2	37.30						
		В	0		**	28.1	37.37						
7/13	0940	S	O	-	-	29.7	37.04						
		В	0	***	849	29.5	36.90						
9/6	1412	S	0	***	-	30.0	36.96						
		В	0		448	29.6	37.20						
10/30	1035	S	0	-	•	23.9	36.36						
		В	0	-	84	23.9	36.36						
12 '13	1305	S	P	⇔	a	21.0	35.75						
		В	P	-	-	20.5	35.81						
1957 2/5	1102	S	0			22.2	36.40						
4/5	1102	В	0	_	~	22.0	36.40						
	0 m 4 m 7 0			D				40 (1	n.T	020	15 71 3	117	
1954	STATIC	JN E	19	Бер	th of	7 feet	20 4	48.61		82	15.71	 	
11/26	1530	S		40	•	22.0	34.20						
1956	1000												
1/17	1526	S	0	-	-	15.0	35.27						
2/14	1247	S	0	0.0	-	19.5	35.75						
2/29	1244	S	0		**	20.4	36.12						
3/14	1104	S	0	ne ne	600	24.5	36.07						
3/26	1405	S	0	-	-	19.8	36.66						
4/3	1210	S	0		-	23.0	37.00						
4/18	1430	S	0	-	-	22.9	36.91						
6/26	1448	S	0	-		30.5	37.68						
7/17	1338	S	0	-	-	31.9	38.08						
7/30	1440	S	0	-		31.0	38.00						
8/6	1010	S	0	-	-	31.5	37.82						
8/13	1152	S	0		set.	30.5	37.96						
8/27	1406	S	0	_	-	31.7	37.06						
9/4	1019	S	0	017	6.0	30.2	37.59						
9/13	0820	S	0	6.0	04	26.5	36.75						
9/24	1137	S	0	-	***	27.5	35.21						
10/2	1304	S	0		-	28.0	36.09						
10/8	1040	S	0		-	27.0	34.19						
10/17	1341	S	0		-	25.5	36.64						
10/25	1224	S	0		-	25.7	36.16						
11/1	1153	S	0	_	***	24.2	36.36						
11/7	1203	S	0	-	000	23.7	36.71						
11/15	1222	S	0	4 904	-	21.5	36.50						
11/19	1214	S	0	140	•	22.0	36.84						
11/26	1055	S	0	_	put	19.5	36.02						
12/3	1142	S	P	-	-	18.5	36.23						
12/11	1319	S	P	0.0	_	21.8	35.82						
12/20	1703	S	0			22.0	35.73						
14/40	1103	0	V	244	-	24.0	33013						

Date	Time	S	C	harra	nu	°C	Sal.	Cu.	F	PO ₄	NO- 3	C.	D
Date	Time	or B	<u>C.</u>	breve M.	pН	C	Sai.	Cu.	In.	Tot.	NO 2	Car.	Pro.
1957													
1/9	1413	S	0	•	_	21.8	36.00						
1/15	1052	S	0	•	_	20 5	35.76						
1/22	1227	S	0	-	~	19.5	35.90						
1/28	1325	S	0	-	-	21.4							
2/5	1028	S	0	-	-	24.3	35.95						
2/11	1016	S	P	-	-	23.3	35.90						
2/20	1240	S	0	•	-	21.6	36.14						
2/26	1114	S	P	-	-	21.2	35.09						
3/7	1442	S	0	-	~	20.5	34.83						
3/12	1132	S	0	_	-	19.5	35.35						
3/18	1410	S	P	-	-	21.5	35.81						
3/28	1316	S	P	~	-	22.3	35.47						
4/17	1100	S	0	_	-	23.5	35.16						
5/3	0940	S	P	_	_	26.8	32.69						
5/7	1254	S	0	-	_	26.0	34.08						
5/8	1245	S	0	_	~	25.0	34.09						
5/14	1506	S	0	_	_	29.8	32.58						
5/21	1043	S	0	_	-	30.5	29.09						
5/27	1123	S	_	0.2	**	30.3	34.93						
6/3	1050	S	P	_	₩.	29.0	32.48						
6/11	1112	S	0	-	040	29.7	34.84						
6/17	1032	S	0	_	-	29.0	31.68						
6/25	1327	S	0	_		_	30.68						
	STATIO	ON B	20	Dep	th of	7 feet		47.61	N	82°	15.21	W	
1954													
4/19	1015	S	P	→	-	-	34.85						
		В	P	-	800	•	34.60						
11/26	1535	S	~	80	-	20.5	34.34						
12/8	1432	S	-	1150	-	17.5	34.61						
12/22	1539	S	one	15	-	15.3	34.31						
12/28	1538	S	¥	8	-	19.7	33.42						
1955 1/20	1239	S	0			16.9	35.43						
3/28	1441	S	0	040		19.9	35. 43						
4/5	1514	S	0	ONO		23.6	35.64						
4/26		S		-		27.2	36.51						
4/40	1401		0	-	~	27.0	36.47						
610	1247	B S	0	_	_	29.3	37.02						
6/8 8/8	1347	S	0	_	~	30.7	36.26						
8/8	1721		0	-	-		35.90						
8/9	1456 0844	S S	0	~	_	31.8 29.5	32.97						
0/23	0077	B	0	-	_	29.8	34.00						
12/19	1520	S	0	==	-	18.1	35.79						
1957		В	0	840	~	17.8	35.79						
5/8	1230	S	P	-	-	25.0	35.44						

	STATIC	ON B	21	Dept	h of	6 feet	26° 4	6.41	N	82°	14.71	W	
Date	Time	S	G.	breve	pН	°C	Sal.	Cu.	F	04	NO-	Car.	Pro.
		В	C.	M.					In.	Tot.	NO ₂		
1954													
11/26 1955	1545	S		700	-	21.0	33.53						
8/8	1715	S	0	000	040	30.8	35.75						
8/9	1441	S	0	-	_	31.5	35.37						
8/25	0837	S	0	_	-	29.0	32.00						
		В	0	-		29.3	32.12						
12/15	1439	S	0	••	•	19.0	35.97						
12/19	1514	S	0	-	-	18.0	35.61						
1956	0000	~	0			20.4	20 12						
7/19	0908	S	0	010	-	30.4	38.12						
1957		В	0	-	-	30.5	38.10						
5/8	1200	S	0	•	-	25.0							
	STATIC	ON B	3 22	Dep	th of	6 feet	26° 4	5.61	N	82°	14.81	W	
1954							~~~		_				
11/26	1553	S		2100	•	21.0	32.27						
12/8	1408	S	•	225	000	17.5	31.94						
12/22 1955	1548	S	-	200	-	15.5	32.03						
4/5	1525	S	0	_	_	24.8	27.25						
6/8	1331	S	0	•	•	29.9	36.19						
7/18	1437	S	0	•	-	31.2	34.23						
.,20		В	0	800	•	30.8	34.00						
8/2	1238	S	0	ea.	_	29.4	32.77						
8/8	1711	S	0	-	-	30.9	34.56						
8/9	1437	S	0	-	040	31.8	33.22						
8/25	0831	S	0		••	30.0	32.55						
·		В	0	mag	_	29.9	33.17						
12/15	1445	S	0	-	_	19.4	35.18						
12/19	1510	S	0	-	-	18.5	34.51						
1956	0001	S	0			30.5	38.12						
7/19	0901	B	0	-	_	30.7	38.21						
1957	1145	S	0	-	_	25. 2	31.78						
5/8	1145			T)	41			4.91	NT.	020	15.11	1 <i>λ t</i>	
1954	STATIO	DN E	23	Бер	th of	6 feet		1.7		02	13.1	**	
11/26	1350	S	010	340	•••	21.0	30.68						
1955 4/26	1425	S	0	_	010	27.2	36.31						
1/20	A A 60 J	В	0	010	***	27.0	36.27						
8/8	1707	S	0	•	_	30.9	34.34						
8/9	1406	S	0	-	***	31.9	31.31						
8/24	1713	S	0	_	***	31.1	32.99						
,		В	0	949	-	31.5	33.06						
12/15	1343	S	0	000	-	19.0	34.75						

		S								PO	NO-		
Date	Time	or	G 1	breve	рΗ	°C	Sal.	Cu.	•	4		Can	D., .
Date	Tillic				pm	C	Dal.	Cu.	-	CD 4	NO ₂	Car.	Pro.
		В	C.	М.					In.	Tot.			
12/19	1500	S	0	-	***	18.1	35.16						
1956		В	0	-	-	18.1	35.18						
1/18	1508	S	0			15.5	35.30						
5/15	0743	S		949	-								
3/13	0143		0	-	-	27.9	36.50						
		В	0	***	-	28.0	36.85						
7/19	0850	S	0	-	om	30.5	37.95						
		В	0	-	-	30.5	38.21						
	COD A COT C	אר דאר	24	D	.1	226	2/0	4.4.01		000			
1954	STATIC	JN E	24	Бер	th oi	21 feet	26 - 2	14.31	N	82	13.1'		
4/19	0940	S	P	_	-	-	33.66						
		В	0	_	_	_	33.78						
11/26	1345	S	_	8	_	20.5	30.21						
12/8	1347	S											
12/0	1341		-	225	-	17.6	34.38						
19 5 5		В	-	225	-	17.9	34.36						
1/20	1218	S	0	-	-	17.5	30.95						
		В	0	-	-	17.4	31.92						
6/8	1316	S	0	-	-	29.4	36.82						
		В	0	_	-	29.0	36.84						
6/27	1232	S	0	-		31.5	35.57						
0,2.		В	0	_	-	31.1	36.08						
7/18	1426	S	0	_		30.9	36.45						
1/10	1420			-	-								
0.10	1010	В	0	-	-	30.7	36.29						
8/2	1210	S	P	-	-	30.0	34.99						
		В	0	-	-	28.9	34.94						
8/8	1656	S	0	**	-	30.2	36.02						
		В	P	-	_	30.5	35.99						
8/9	1356	S	0	-	-	31.2	29.45						
		В	0	-		30.7	32.12						
8/16	1224	S	0	_	-	30.0	35.97						
		В	0	-	-	30.6	36.11						
8/25	0952	S	0			30.5	35.32						
0/25	0 / 3 2	В	0	_		30.5	35.32						
12/19	1540	S	0	-	-	18.0	34.92						
14/17	1340			••	-								
		В	0	-	***	17.9	34.83						
	STATIC	N B	25	Dep	th of	10 feet	26° 4	4.4' 1	1	82°	10 1 W		
1955	1.403				0 1	20.4	25 24	0.14					
3/28	1401	S	0	80.	8.1	20.4	35.34	0.14					
		В	0	040	8.2	20.3	35. 26	0.08					
4/26	1308	S	0	-	8.0	27.0	35.97	0.18					
_ ,		В	0	-	8.0	27.0	35.81	0.01					
7/18	1412	S	0	-	7.9	31.0	35.90	0.06					
8/2	1156	S	0	-	-	29.4	33.75	0.26					
		В	0	•	-	28.9	33.66	0.32					
8/25	1030	S	0		-	29.8	30.64	0.02					

		S		· · · · · · · · · · · · · · · · · · ·					F	20,	NO-		
Date	Time	or		reve	рН	°C	Sal.	Cu.		4	NO_2	Car.	Pro.
1956		В	C.	М.					In.	Tot.	2		
2/14	1240	S	0	_	04	19.8	35.58						
7/19	0944	S	0	_	000	30.8	37.57						
•		В	0	_	-	31.0	37.57						
9/4	0720	S	0	-		28.5	36.63						
10/2	1311	S	0	_	-	28.6	31.69						
11/7	1210	S	0	-	tret	23.8	26.70						
1957													
5/3	0945	S	O		***	26.5	30.78						
5/14	1512	S	0	-	-	29.5	30.54						
5/27	1128	S	0	-	-	30.5	28.77						
6/3	1100	S	P	-		29.5	28.76						
6/11	1118	S	0	-	••	30.0	29.30						
1054	STATIC	ON B	26	Dep	th of	62 feet	26° 4	71 N		82°	351 W		
1956 5/14	1314	S	0	-	-	28.2	36.91						
, -		В	0	-	**	26.5	36.84						
7/17	1241	S	0	-	_	30.1	36.84						
•		В	0	-	-	29.7	36.82						
11/16	1115	S	P	•	840	23.5	36.60						
		В	0	_	-	23.2	36.81						
12/11	1158	S	P	-	••	21.6	36.49						
		В	0	_	-	21.7	36.71						
1957 1/10	1241	S	0	010	000	20.7							
1/10	10.1	В	P	m.		20.1							
2/6	1440	S	0	-	-	22.7	36.07						
-,-		В	0	-	010	21.4	36.04						
	STATIC			Dep	th of	44 feet	26° 4	5.81	N	82°	25.81	W	
1954 12/16	1305	S	0			17.7	35.26						
12/10	1303	В	0	_	_	17.8	35.26						
12/22	1343	S	P	_	_	16.3	35.17						
	1313	В	P	_		16.8	35.19						
1955 6/28	1200	S	0	_	_	30.1	36.55						
0/20	1200	В	0	_	_	29.4	36.55						
7/18	1549	S	0	_		31.2	36.36						
1/10	131/	В	0	_	_	30.1	36.73						
8/4	1153	S	0	_	-	-	35.97						
0/1	1133	В	0		-	-	36.35						
8/17	1212	S	0	**	-	30.0	36.74						
0/11		В	0		••	29.4	36.60						
8/31	1147	S	0	010	-	30.3	35.57						
0,01		В	0	010	-	30.2	35.99						
9/14	1244	S	0	-	••	29.9	35.28						
,,		В	0	_	-	30.2	35.71						

Dat

	OTILITO			, 555	-,								
		S							P	0,	NO ₃ -		
Date	Time	or	G.	breve	pН	°C	Sal.	Cu.		4	ОИ	Car.	Pro.
		В	C.	M.					In.	Tot.	2		
9/29	1157	S	0	-	-	29.8	34.22						
		В	0	•••	**	30.0	35.08						
12/7	1055	S	0	-	-	21.3	36.23						
1956		В	P	-	-	20.5	36.33						
2/2	1112	S	0	_	449	17.7	36.03						
		В	0	-		16.4	36.13						
	STATIC			Den	th of	30 feet	26° 4	51 N		82°	18.61	W	
1954	011111			Dop	011 01	30 1000							
4/19	1205	S	P	***	-		34.42						
		В	P	-	_	eat	34.34						
8/12	0902	S	P	-		30.5	32.12						
		В	0	-		30.1	35.23						
8/23	1738	S	0	_	-	30.5	34.04						
		В	0	-	-	29.8	34.67						
9/13	1305	S	0	-	-	29.6	34.34						
		В	0	-		29.2	35.46						
9/24	1135	S	-	25	-	28.7	32.47						
		В	0	-	-	29.2	34.29						
12/16	1116	S	-	250	-	17.3	34.83						
		В	-	200		17.3							
12/22	1417	S	-	250	-	16.2	34.51						
		В	P	-	-	15.9	34.52						
12/28	1455	S	P	-	-	17.4	34.60						
1955		В	P	-	-	16.9	35.12						
8/2	1310	S	0	***	-	31.1	35.79						
		В	0	-	-	29.2	36.06						
8/16	1304	S	0	-	-	30.0	37.50						
		В	0	-	-	30.0	37.68						
8/30	1205	S	0	-	•••	31.0	35.84						
		В	0	-	-	30.7	35.90						
9/12	1431	S	0	•	-	30.8	32.71						
		В	0	-	-	29.8	34.87						
9/27	1358	S	0	-		30.0	33.96						
		В	0	-	-	29.8	34.90						
11/1	1449	S	0	-	-	23.7	35.50						
1956		В	0	-	-	23.8	35.44						
3/14	1042	S	0	-	-	23.5	34.68						
		В	0	-	***	23.9	36.06						
5/9	1102	S	0	000		27.1	37.04						
		В	0	-	-	27.2	37.22						
6/7	1010	S	0	440	-	28.0	37.06						
		В	0	***		28.0	37.20						
7/13	0913	S	0	-	***	29.5	37.24						
		В	0		-	29.5	36.90						

	DIIII		, 20	(00111 0	-/								
		S							F	PO ₄	NO-		
Date	Time	or	G.	breve	рН	°C	Sal.	Cu.		4	3	Car.	Pro.
		В	C.	M.					In.	Tot.	NO	001	2 10.
9/6	1345	S	0	-	-	31.4	36.96						
		В	0	-	-	30.3	36.75						
10/30	1007	S	P	•	-	24.0	36.35						
		В	0	_	-	24.0	36.34						
12/13	1331	S	-	0.2	-	21.2	35.74						
1957		В	P	-	-	20.6	35.86						
1/8	1019	S	0	_		19.0	35.76						
		В	0	-	.	18.5	36.01						
2/5	1034	S	0	_	_	22.4	35.60						
		В	0	840	_	21.6	35.90						
	STATIO	N P	29	Dent	h of	65 feet	26° 4	2. 811	V	82°	15.5°	w	
1954				<u>Б</u> ор.							10,0	''	
4/19	1320	S	0	-	-	-	33.19						
		В	P	-	•	-	34.05						
5/8	1600	S	0	040	-	27.9	34.63						
8/23	1800	S	0	-	-	30.4	34.04						
		В	0	-	-	30.0	28.31						
11/24	1205	S	-	30	-	•	31.69						
		В	P										
12/8	1510	S	-	125	-	17.8	34.04						
		В	-	65	-	18.4	34.70						
12/14	1344	S	-	95	440	17.4	33.33						
		В	-	40	-	17.4	33.82						
12/22	1517	S	-	200	-	15.5	34.33						
		В	•	75	-	15.8	34.43						
12/28	1514	S	0	-	-	17.6	33.40						
1955		В	0	-	-	17.4	34.33						
1/20	1302	S	0	-	•	17.5	33.26						
		В	0	•	₩	17.6	35.25						
2/10	1238	S	0	***	-	17.9	34.20						
		10	0	-	-	17.9	34.38						
		20	0	-	-	17.7	34.65						
		30	0	-	-	17.7	34.67						
		40	0	000	-	17.6	34.58						
2/17	1415	S	0	-	-	16.1	34.83						
		В	0	-		15.9	35. 10						
3/28	1514	S	0	-	8.1	20.5	35.84	0.11					
		В	0	000	8.1	20.6	35.97	0.14					
4/26	1440	S	0	•	7.9	26.7	36.36	0.18					
		В	0	•	8.0	26.5	36.40	0.12					
7/18	1451	S	0	••	7.9	30.6	36.42	0.04					
- 1		В	0	••	8.0	30.6	36.35	0.06					
8/2	1241	S	0	••	•	30.0	34.61	0.66					
		В	0	-		29.7	35.48	0.4	r				

Date Time or G. breve pH °C Sal. Cu. 4 3 In. Tot. NO2 Car. Proceedings of the control of the con
B C. M. In. Tot. 102 8/16 1239 S 0 30.0 36.15 0.04 B 0 30.0 36.11 0.04 8/25 0905 S 0 30.5 35.79 0.11 B P 30.2 35.77 0.05 9/27 1337 S 0 - 8.1 29.6 27.48 0.12 3.1 3.4 - 4.0 2
B 0 30.0 36.11 0.04 8/25 0905 S 0 30.5 35.79 0.11 B P 30.2 35.77 0.05 9/27 1337 S 0 - 8.1 29.6 27.48 0.12 3.1 3.4 - 4.0 2
8/25 0905 S 0 30.5 35.79 0.11 B P 30.2 35.77 0.05 9/27 1337 S 0 - 8.1 29.6 27.48 0.12 3.1 3.4 - 4.0 2
B P 30.2 35.77 0.05 9/27 1337 S 0 - 8.1 29.6 27.48 0.12 3.1 3.4 - 4.0 2
9/27 1337 S 0 - 8.1 29.6 27.48 0.12 3.1 3.4 - 4.0 2
B 0 - 8.1 29.4 30.16 0.11 - 2.7 3
11/1 1430 S 0 - 7.9 23.0 33.49 0.17 26.2 10
B 0 - 8.0 23.4 34.83 0.09 9.5 2
12/7 0954 S 0 - 8.0 20.9 34.59 0.22 0.6 0.7 - 0.6 1
B 0 - 8.1 20.4 35.00 0.12 0.5 - 0.7
2/2 1214 S 0 18.2 35.25 0.04 0.0 0.0 - 3.3 1
B 0 18.5 35.41 0.05 1.0 1.0 1
3/14 1021 S 0 - 8.0 24.0 36.14 - 0.6 0.9 - 0.0 3
B 0 - 8.1 24.0 36.17 - 0.3 0.3 - 1.0 1
5/9 1044 S 0 - 8.1 27.5 37.31 0.14 0.4 1.5 0.1 1.4
B 0 - 8.1 27.5 37.24 0.07 0.4 1.6 0.1 1.7 0
6/7 0954 S 0 - 8.4 28.4 36.94 0.04 0.3 1.1 0.1 1.0 0
B 0 - 8.4 28.2 37.08 0.00 0.3 0.5 0.0 0.9 0
7/13 0848 S 0 - 8.2 29.7 36.87 0.16 0.5 0.5 0.4 0.5 0
B 0 - 8.2 29.4 37.07 0.06 0.3 0.5 1.8 0.5 0
9/6 1322 S 0 - 8.0 30.0 37.01 0.05 0.2 0.3 0.0 0.9 0
B 0 - 8.1 30.0 36.87 0.08 0.3 0.3 0.1 0.7 0
10/30 0947 S 0 - 8.0 22.7 35.44 0.8 0.4 0.5 0
B 0 - 8.1 22.5 35.80 0.18 - 0.3 1.0 0.5 0
11/16 1355 S 0 - 22.0 35.04 0.15 1.1 1.6 0.3 1.2 0
B 0 21.6 36.30 0.15 1.0 1.1 0.2 2.9 0
12/13 1347 S 0 - 20.5 35.15 0.34 0.9 1.0 0.3 2.9 1
20 0 20.6 35.35 0.27 0.8 1.6 0.4 2.9 1
40 - 0.2 - 20.6 35.81 0.21 - 1.1 0.5 1.9 0
B P 21.0 35.42 0.04 4.0 5.4 1.2 1.6 1
1/8 0957 S 0 19.1 36.07 0.19 - 0.7 1.6 1.1 0
B 0 19.0 35.90 0.25 - 0.7 0.4 0.8 0
2/5 1009 S 0 - 8.1 23.8 34.80 0.54 1.2 1.5 0.4 0.8 0
M 0 - 8.1 23.3 35.20 0.54 1.2 1.2 0.0 1.4 0
B 0 - 8.1 23.2 35.60 0.31 1.1 1.1 0.8 0.5 1
2/26 1124 S 0 21.0 34.77 0.04
3/28 1052 S 0 21.5 33.71 0.00 0.1 1.7 0.8 2.7 0 4/12 1248 S 0 25.3 33.80 0.08 0.5 1.0 1.8 - 0
4/12 1248 S 0 = 25.7 33.93 0.14
5/7 1300 S P - 25.5 33.85 0.12
5/27 1131 S P 30.0 34.77 0.43
6/3 1108 S 0 29.7 33.03 0.00
6/11 1125 S 0 - 29.5 31.78 0.05
6/27 0700 S 0 - 8.1 30.0 33.16 0.06 1.2
B 0 - 8.1 31.1 35.18 0.07 - 1.6

	STATIC	ON E	3 3 0	Dep	th of	17 feet	26° 4	3.51 N	82°	14.41 W	I	
		S						*************	PO ₄	NO-		
Date	Time	or	G.	breve	рН	°C	Sal.	Cu.	4	3	Car.	Pro.
		В	C.	M.				In.	Tot.	NO_2		
1955												
8/8	1640	S	0	-	-	30.3	36.00					
		В	0	-	-	30.3	35.99					
8/9	1350	S	0	•	-	30.9	33.04					
		В	0	_	_	30.8	34.00					
8/24	1707	S	0	-	-	31.0	35.12					
		В	0	•••	-	31.0	35.05					
9/17	1407	S	0	-	_	30.5	27.39					
		В	0	-	-	30.2	30.73					
9/27	1332	S	0	_	-	29.8	28.96					
		В	0	_	-	29.5	32.99					
11/1	1420	S	0	-	_	23.1	34.65					
		В	0	-	_	23.5	34.56					
11/22	1016	S	P	~	-	21.5	34.38					
		В	P	-	-	21.9	34.47					
1956 1/18	1457		0				35.50					
1/10	1457	S	0	-	-	14.9						
7/10	0022	B S		-	-	15.9	35.54					
7/19	0922	B	0	-	-	30.2	37.41					
			0	-	-	30.2	37.35					
	STATIC	N B	31	Dep	th of	5 feet	26° 4	2.31 N	82°	11' W		
1954 4/19	0915	S	0	-	_		27.59					
11/24	1137	S	0	_	_	_	28.69					
12/8	1310	S	0	_	_	16.3	29.38					
1955	1310	D	O	_	_	10.5	27.50					
1/20	1200	S	0	_	_	16.4	30.93					
		В	0	-	•••	16.6	30.88					
4/26	1251	S	0	-	-	27.0	34.74					
		В	0	-	_	27.1	34.67					
6/8	1240	S	0	_	-	28.6	36.50					
6/27	1154	S	0	_	-	32.5	35.14					
7/18	1400	S	0	_	cm	31.0	33.71					
		В	0	-	_	30.6	34.58					
8/2	1146	S	0	-	**	28.6	31.09					
8/8	1805	S	0	-	**	30.7	31.20					
		В	0	-	-	30.7	32.16					
8/9	1603	S	0	••	_	31.6	29.36					
		В	0	-	-	31.2	30.34					
8/25	1106	S	0	-		30.0	34.40					
		В	0	_	-	30.0	34.97					
12/1	1020	S	0	-	-	15.8	30.86					
12/15	1300	S	0	-	-	19.0	31.75					
12/19	1559	S	0	-	-	18.5	33.34					
1956 3/20	1429	S	0	***	-	19.9	36.52					
7/19	0954	S	0		-	31.0	37.68					
1957		В	0	-	-	30.5	37.66					
5/7	1247	S	0	-	-	25.3	28.50					
						76)					

1	STATIO	ON B	32	Dept	th of	4 feet	26° 42	2.4' N		° 09.91 V	V	
		S							PO_4	NO-		
Date	Time	or B	G. b	M.	pН	°C	Sal.	Cu. I	n. Tot	NO_{2}^{3}	Car.	Pro.
1954												
4/2	0910	S	0	-	_	25.9	26.97					
1955	0945	S	0			27.8	34.56					
5/11 5/25	1525	S	0	-	_	31.2	35.53					
6/10	1212	S	0	_	_	28.4	36.12					
6/17	1210	S	0		_	28.4	35.37					
7/2	1611	S	0	_	_	32.0	31.76					
12/15		S	0	-	-	19.2	31.77					
	STATIO	ON B	33	Dep	th of	20 feet	26° 4	1.81 N	82	° 18.21 V	N_	
1954	1250	C	D				34.36					
4/19	1250	S B	P 0	_	-	_	34.40					
11/24	1225	S	-	140	-	_	33.06					
11/47	1245	В	_	30	813	-	33.77					
1955	1204											
6/27	1304	S	0	_	000	31.0	36.45					
8/8	1608	B S	0	-	-	30.7 30.4	36.13					
0/0	1000	В	0	_	_	30.4	36. 13					
8/9	1330	S	0	~	_	30.8	34.47					
0//	1000	В	0	_	-	30.7	35.55					
8/25	0926	S	0	-	***	30.0	35.26					
		В	P	-	-	30.0	35.23					
11/21	1546	S	0	-	-	23.1	35.44					
		В	P	-	-	22.5	35.62					
11/22	1040	S	P	-	-	21.5	34.74					
		В	0	-	•	22.1	35.00					
12/1	1125	S	P	-		19.2	35.87					
10/10	141/	В	0	-	-	19.2	35.73 35.61					
12/19	1416	S B	0	-	-	18.1 18.1						
1956				_	-							
1/19	0815	S	0		_	15.0 15.0	35.49 35.51					
2/2	1201	B S	0	-		17.9	35.68					
2/2	1201	B	0	_	_	18.0	35.68					
5/14	1613	S	0	***	_	27.9	37.25					
3/11	1015	В	0	_	_	28.0	37.40					
	STATI			Dep	th of	68 feet		8.2° N	82	° 32.81	W	
1955 6/29	1503	S	0		8.0	30.4	36.41	0.19				
0/29	1505	B	0	-	8. 1		36.44	0.31				
11/3	1200	S	0	_	8.1		36.36	0.34	ana e		5.0	1.1
/ -		В	0	-	8.1			0.07	0.1 0.	2 -	5.7	1.9

											NIC		
D .	CC3 *	S	C 1		T T	0.0	Co.1	C	P	04	NO -	C	
Date	Time	or			рН	°C	Sal.	Cu.			NO ₂	Car.	Pro.
		В	C.	M.					In.	Tot.	2		
1956	1004	~	13			10 1	2/ 45	0 05	0 2	0 0		0 0	0 0
1/31	1234	S	P	-	—	18.1	36.45	0.05		0.2	-	0.3	0.0
2 / 2 7		В	0	-	_	17.2	36.41	0.04		0.8	-	0.5	0.5
3/15	1558	S	0	-	8. 1	23.4	36.53	0.04		0.3	ub.	0.7	
		В	0	-	8. 1	22.3	36.53	0.12	0.1	0.1	-	0.2	0.2
5/14	1414	S	0	•	8.2	27.8	36.87	0.00	0.0	0.3	0.5	0.5	0.0
		В	0	••	8.2	26.5	36.83	0.08	0.5	0.9	0.0	1.2	0.0
6/13	1130	S	0	_	8.2	27.4	36.89	0.05	94	0.2	0.0	2.1	0.0
		В	0	-	8.2	27.1	37.04	0.02	0.3	0.3	0.0	0.9	0.3
7/17	1334	S	0		8.1	30.0	36.68	0.03	848	0.0	0.4	1.6	0.1
.,		В	0		8.2	29.5	36.54	0.00	_	0.1	0.3	1.4	0.0
9/13	1431	S	0	_	8. 2	28.9	37.00	0.00	-	0.0	0.4	0.4	0.1
7/13	1131	В			8. 2	29.0	36.96	0.04	_	0.1	0.7	1.4	0.1
11/16	1203	S	0	-	8. 2	23.0	36.85	0.13		0.2	1.7	0.3	0.0
11/10	1203				8. 2		36.73	0.28		0.2	0.0	2.4	0.2
20/22	1100	В	0	**		23.0							
12/11	1102	S	P	-	***	20.7	36.45	0.08		0.0	0.4	0.3	0.2
1957		В	P	-	_	20.7	36.62	0.14	-	0.3	0.4	1.7	1.0
1/10	1316	S	0	-	-	21.3	-	0.11	•	0.4	1.2	0.6	0.5
		В	0	_	_	20.3	-	0.00	0.0	0.1	-	0.8	0.0
2/6	1527	S	0	-	8.0	23.0	36.23	0.36	-	0.6	0.8	1.0	0.5
-,-		В	0	-	8.1	21.0	36.17	0.08	0.5	0.5	0.1	-	1.0
	STATIO	ON E	3 35	Dep	th of	50 feet	26°3	9.5' N	_	82 7	26.5' W		
1954	3.400		0			20 0	34.47						
6/10	1432	S	0	•	_	29.9							
		В	0	-	_	28.0	35.39						
12/16	1336	S	-	25	94	18.0	35.39						
		В	-	3	_	18.0	35.35						
12/22	1309	S	-	5	-	17.2	35.44						
1055		В	P	_	•	17.4	35.35						
1955 2/15	1146	S	0	1		16.1	35.97						
2/15	1110	В	0		_	16.0	35.93						
0.100	1025			_	8.0	20.5		0 13					
3/30	1325	S		_									
		В	0	-	8.0	20.4	36.38	0.08					
6/8	1522	S	0	teg	-	29.1	36.68						
		В	0	-	-	28.0	36.73	0 00					
6/28	1121	S	0	540	8.1	30.0	36.56	0.09					
		В	0	-	8.2	29.5	36.40	0.32					
8/4	1224	S	0	-	-	30.0	36.06	0.44					
9/14	1314	S	0	-	•	29.9	35.99	0.00		2.3			
		В	0	-		30.2	36.15	0.17	-	0.2			
9/29	1231	S	0	~4	8.1	29.9	35.73	0.19					
//-/		В		↔	8. 1	30.0	35.73	0.08	**	-	-	-	3.4
11/3	1232	S	0	-	7.9	24.5	35.84	0.01	-	-	-	5.0	1.8
1113	1	E		-	8.0	24.0	35.93	0.18					

		S							P	04	NO		
Date	Time	or	G. 1	oreve	рН	°C	Sal.	Cu.	_	4	NO	Car.	Pro.
		В	C.	M.	T				In.	Tot.	2		
12/8	1600	S	0		8.1	22.4	36.16	0.18	0.0	0.2	-	2.5	
		В	0	-	8.1	21.4	36.49	0.36	0.2	0.3	-	3.1	
1956 1/31	1205	s	0	-	-	17.7	36.25	0.07	0.2	0.2	-	1.2	0.8
1/51	1203	В	0	_	-	17.4	36.35	0.05	_	-	-	0.6	0.5
3/15	1622	S	0	-	8.2	23.6	36.54	0.00	0.2	0.3	_	0.6	0.3
		В	0	↔	8.2	23.0	36.53	0.10	***	0.3	-	-	0.0
5/14	1439	S	0	•••	8.1	27.7	36.90	0.07	0.1	0.4	0.4	1.4	0.0
		В	0	-	8.2	27.0	36.98	0.06	-	0.4	0.2	0.5	0.1
6/13	1203	S	0	-	8.2	27.4	36.96	0.04	0.1	0.2	0.6	0.7	0.2
		В	0	_	8.2	27.1	37.03	0.03	0.2	-	0.1	0.6	0.0
7/17	1400	S	0	↔	8.1	30.5	36.86	0.01		0.0	0.3	1.0	0.0
		В	0	***	8.2	30.0	37.02	0.00	-	0.2	0.2	0.6	0.2
9/13	1506	S	0	_	-	28.4	36.72	0.01	0.0	0.3	0.0	0.6	0.0
		В	P	-	-	28.5	36.66	0.03	0.1	0.1	0.9	0.9	0.0
11/16	1226	S	P	-	8.3	23.0	36.84	0.30	-	0.2	0.2	1.0	0.2
		В	0	-	8.2	23.8	36.98	0.12	-	0.3	1.4	0.4	0.2
12/11	1036	S	-	0.2	-	20.0	36.26	0.00	~ /	1.3	0.4	1.4	0.1
1957		В	P	-	-	20.0	36.17	0.10	0.6	0.8	0.7	1.5	0.9
1/10	1342	S	P	-	₩	21.1	•	0.02	0.1	0.1	0.8	1.4	1.9
		В	0	-	**	20.2	000	0.04	0.1	0.3	0.2	0.9	
2/6	1549	S	P	_	8.1	22.5	35.69	0.09	-	1.0	0.8	0.6	0.6
		В	0	-	8.1	20.3	36.07	0.00	0.5	0.8	0.2	0.6	0.5
	STATIO	INC	R 36	Den	th of	23 feet	26° 4	0.61 N	J	82°	19¹ W		
1954	DIAIN	O1V 1	3 30	Бер	tii Oi	23 1001	20 1	.0.0 1					
9/24	1150	S	010	3	-	29.0	31.83						
.,-		В	P	-	↔	29.4	30.77						
11/24	1240	S	-	80	-	-	33.51						
		В	P	-	-	-	34.49						
12/8	1536	S	-	375	~	18.9	34.92						
		В	-	70	***	18.7	34.94						
12/16	1046	S	-	1250	-	17.4	34.97						
1955		В	***	200	-	17.5	34.94						
2/10	1316	S	0	000		18.1	34.85						
		В	0	-	•	17.5	35.08						
3/30	1249	S	0	-	-	20.3	36.13						
		В	0	-	_	20.2	***						
6/8	1443	S	0	-	-	28.6	36.84						
		В	P	_	-	28.8	36.84						
6/27	1314	S	0	-	-	31.6							
		В	0	-	•	29.7	~ ~ ~ ~ /						
7/18	1511	S	0	-	-	31.2	36.36						
		В	0	-		30.4	36.60						

		S							P)	NO-		
Date	Time	or	G- 1	oreve	рН	°C	Sal.	Cu.	Τ,	4	3	Car	Dro
22000	2 41110	В	C.	M.	LII		DOM 9	Ju.	In.	Tot.	NO ₂	Car.	Pro.
8/8	1605	S	0	1410		30.5	36.13		4410	100			
0,0	1005	В	0			30.0	36.13						
0.70	1222			••	-								
8/9	1322	S	0	-	•	31.0	35.43						
0/17	1250	В	0	949	-	30.4	36.06						
8/17	1259	S	P	-	•	30.0	36.45						
0./00		В	0	-		30.6	36.40						
8/30	1141	S	0	010	-	30.7	36.06						
0/2/		В	0	-		30.7	34.43						
9/14	1346	S	0	-	-	29.9	33.22						
- 1		В	0	-	-	29.9	34.56						
9/29	1313	S	0	-	04	30.0	32.97						
,		В	0	~	-	30.2	34.92						
12/7	1012	S	P	-	8.1	20.7	34.94	0.20	0-0	0.3	-	0.5	
1956		В	P	•	8. 2	20.3	35.41	0.09	0.5	0.7	-	1. 1	14.4
5/14	1603	S	0	-	8.1	28.0	37.32	0.18	0.4	1.3	0.0		0.1
		В	0	_	8.1	27.8	37.33	0.15	0.4	1.0	0.5	1.3	0.0
6/13	1250	S	0		8.3	27.4	37.18	0.05	0.3	0.6	0.0	1.4	0.0
		В	0	_	8.3	27.4	36.99	0.09	0.4	0.9	0.0	1.6	0.0
7/17	1442	S	0	**	8.1	31.0	37.48	0.03	-	0.3	0.3	1.2	0.0
		В	0	-	8. 2	31.0	37.35	0.03	-	0.0	0.2	0.8	0.2
9/13	1542	S	0	•	8.2	27.3	35.82	0.03	1.5	1.5	0.0	1.2	1. 1
		В	0	-	8.3	27.6	36.21	0.03	**	0.5	3.9	1.2	0.1
11/16	1342	S	0	-	8.2	22.5	35.10	0.21	1.0	1.5	0.2	2.4	0.5
		В	P		8. 1	22.0	36.55	0.09	0.6	1.0	2.1	1.6	0.5
12/11	1008	S	P	-	-	19.3	35.64	0.03	0.6	0.9	2. 2	1.4	0.4
		В	04	0.2	040	19.5	35.73	0.06	0.8	1.1	1.4	0.7	0.2
1957 1/10	1310	S	P			21.0		0.01	-	0.6	1.2	2.2	0.6
1/10	1310	В	0	000	_	19.9	est 010	0.52	-	0.5	1.2	1. 1	1.1
2/6	1616	S	P		8.1	23.5	36.02	0.99	0.9	1.1	0.7	1.4	0.7
2/0	1010	В	P		8.1	20.8	35.95	-	0.5	0.7	0.4	1.7	0.1
1054	STATIO	ON E	3 37	Dep	th of	32 feet	26 3	9.6' N		82	18.5' W	-	
1954 12/8	1543	S	-	1900		18.6	34.18						
12/22	1450	S	-	1050	-	16.6	34. 67						
14/44	1400	В	P			16.5	35.03						
12/28	1420	S	P =	8	-	17.9	33.87						
12/20	1420	B	0			17.3	35.14						
1955				-	-								
8/8	1554	S	0	***	-	30.8	36.09						
- 4-		В	P	-	•	30.5	36.40						
8/9	1308	S	0	***	0=0	31.2	35.46						
		В	0	-	-	31.4	36.06						
8/17	1302	S	0	•	dice	30.3	36.47						
		В	0	-	-	30.0	36.38						

Date	Time	S	G. b	reve	pН	°C	Sal.	Cu.	P	4	NO -	Car.	Pro.
		В	C.	M.					In.	Tot.	NO_2		
8/30	1134	S	0		-	30.2	35.35						
		В	0	-	~	30.3	36.18						
9/14	1453	S	0	-	- mark	29.9	33.73						
		В	0	-		29.9	34.67						
9/29	1319	S	0	-	-	29.9	34.29						
		В	0	-	-	29.9	35,41						
12/19	1432	S	P		-	19.0	35.44						
1956		В	0	-		18.0	35.56						
3/15	1700	S	0	•-	-	24.6	36.26						
		В	0	-	-	24.2	36.10						
5/15	0820	S	0	-	-	28.0	37.36						
(1 = 0		В	0	-	•••	28.0	37.33						
6/13	1302	S	0		-	27.6	37.07						
		В	0	-	-	27.5	37.05						
1055	STATIC	ON B	38	Dep	th of	9 feet	26° 40.	.51 N	1	82°	13.2' W	_	
1955 4/26	1507	S	0			27.5	35.95						
1/20	1501	В	0	_	_	27.5	36.02						
7/20	1755	S	0	-	-	31.1	35.46						
8/16	1155	S	0		-	30.0	32.72						
		В	0	-	-	-	32.83						
8/24	1650	S	0	-	467	31.5	35.30						
		В	0	-		31.9	35.14						
9/12	1352	S	0	-	800	31.2	28.84						
9/27	1317	S	0	-	613	29.0	31.94						
11/1	1405	S	0	-	-	22.6	31.02						
11/21	1615	S	0	-	•	21.9	32.26						
12/19	1334	S	0	C.P	-	17.9	34.13						
1956		В	0	-	-	17.7	34.13						
1/18	1437	S	0	-	-	15.5	35.56						
2/2	1231	S	0	***	-	19.6	35, 23						
2/14	0000	В	0	-	-	19.9	35.29						
3/14	0909	S B	0	-	_	24.5 24.5	36.24 36.14						
5/9	0 9 37	S	0	-	-	27.1	38. 23						
317	0 / 5 !	В	0	-	_	27.1	38.04						
6/7	0936	S	0	-	***	28.0	37.34						
		В	0	_		27.8	37.35						
6/28	0955	S	0		-	31.0	37.77						
		В	0	-	_	30.5	37.86						
7/13	0838	S	0	_	-	30.0	37.88						
		В	0	-	-	30.0	37.64						
9/6	1307	S	0	-	-	29.0	36. 26						
		В	0	-		28.5	35.38						

		S							P	0	NO		
Date	Time	or		breve	рН	°C	Sal.	Cu		4	NO NO	Car.	Pro.
_		В	C.	M.				Iı	n.	Tot.	2		
10/30	0923	S	0	~	-	22.9	31.07						
		В	0	-		22.6	31.17						
11/16	1412	S	0	_	040	22.4	34.33						
		В	0	049		22.3	34.87						
12/13	1405	S	0	_	_	22.4	34.31						
1957		В	0	-	_	22.6	34.79						
1/8	0856	S	0		-	19.1	35.16						
1/0	0050	В	0	_	-	19.0	35.16						
2/5	0952	S	0	_	_	23.8	36.20						
2/3	0752	В	0	-	_	24.0	36. 20						
E /7	1205	S		-	-								
5/7	1305	2	0	_	-	25.3	32.07						
	STATIC	ON B	39	Dep	th of	7 feet	26° 40	.31 N		82°	12.4 T	T	
1954	1045					21 2	22 57						
6/11 1955	1245	S	0	-		31.3	32.57						
6/8	1222	S	0	-	-	29.0	36.79						
6/27	1143	S	0	_	-	32.0	36.04						
7/18	1349	S	0	-		31.2	35.28						
1/10	1347	В	0	040	_	30.7	35. 90						
0/2	1127	S		-	_	28.9	33.44						
8/2	1137		0	-	_								
8/8	1816	S	0	-	-	30.9	32.48						
8/24	1646	S	0	-	**	31.7	34.52						
		В	0	040	-	31.9	34.65						
12/1	1010	S	0		_	16.1	31.71						
12/19	1609	S	0	040	-	18.0	33.51						
1956 3/20	1446	S	0		-	19.0	36.44						
6/28	1008	S	0			31.0	38.04						
0/20	1000			-	-		38.00						
7/10	1004	В	0		-	29.9							
7/19	1006	S	0	000	-	31.1	37.74						
1957	1000	В	0	-		30.9	37.74						
5/7	1300	S	0	-	-	25.5	31.22						
	STATIC	ON I	3 40	Dep	th of	10 feet	26° 3′	7.6' N		82°	12.5' W	7_	
1954	1200	-				21 1	22 04						
6/11	1300	S	0	1.0		31.1	33.04						
12/8	1222	S	-	13	***	17.8	33.91						
12/22	1632	S	_	350	-	16.2	34.33						
12/28	1630	S	-	55	-	17.9	32.79						
1955 1/20	1136	S	0			16.4	35.43						
2/17	1448	S	0	_	_	16.2	35. 17						
3/28	1326	S	0	_	_	20.4	35.37						
3/20	1320	В	0	_	_	20.1	35.37						
A / E	1540	S	0	_		24.0	35.59						
4/5	1540			-	7 0			0.20					
4/26	1216	S	0	-	7.8	27.5	36.00	0.20					
		В	0	600	7.9	27.3	36.53	0.14					

Date	Time	S	G. b	reve	рН	°C	Sal.	Cu.	P	04	NO-3	Car.	Pro.
		В	C.	M.					In.	Tot.	2		
6/8	1203	S	0	-		29.4	37.02						
6/27	1129	S	0	⇔	_	32.0	36.38						
7/18	1335	S	0	-	8.0	31.4	36.29	0.07					
		В	0	_	8.1	31.0	35.93	0.04					
8/2	1122	S	0	949	-	30.0	35.30	0.20					
8/16	1128	S	0	_	•	-	36.00	0.02					
0.10.1	. / 0 /	В	0	-	-	000	35.91	0.02					
8/24	1634	S	0	-	-	31.7	35.84	0.18					
0/10	1007	В	0	-	-	31.8	35.90	0.08					
9/12	1337	S	0	•••		30.2	31.06	0.02	~ /	0.4		2 5	2 /
9/27	1301	S	0	_	7.9	29.1	32.90	0.11	0.6	0.8	***	2.7	1.6
11/1	1349 0940	S S	0	-	8.0	22.9	34.83	0.11					
12/7	0940	В	0	~	7.8 7.9	21.3	33.96	0.18	0 6	0 0		4 =	
1956				-		21.3	34.25	0.19		0.9	-	6.5	
2/2	1246	S	0	***	-	20.0	35.64	0.17	000	0.0	-	1.0	0.9
0/14	0054	В	0	-	-	20.3	35.63		0.3	0.9	-	0.8	1.8
3/14	0854	S	0	-	8.2	25.1	36.54	0.11	0.3	0.5		1.2	0.1
F 10	0020	В	0	_	8.3	25.0	36.44	0.08	0.5	0.6	-	1.6	2.0
5/9	0920	S	0	_	8.1	27.3	37.54	0.02	0.9	2.2		1.1	0.0
6/7	0921	B S	0	~	8.1 8.4	27.3	37.52	0.02	0.2	1.2	0.2	1.1	0.0
0/1	0721	В	0	-	8.4	28.8 28.5	37.27 37.30	0.00	0 0	0.6	0.0 0.4	1.7	0.0
7/13	0822	S	0	_	8. 1	30.0	37.53	0.10		1.1	0.2	1.0	0.1
1723	0042	В	0		8.0	30.0	37.60	0.16	_	0.5	0.5	0.7	0.1
9/6	1255	S	0	-	8.1	29.8	36.64	0.09		0,5	0.9	1.1	0.1
,,-		В	0	-	8. 1	29.5	36.50	0.08	0.5	0.8	9.5	1.8	0.1
10/30	0907	S	0	-	8.0	23.4	35.84	0.12	84	0.5	0.4	0.6	0.2
		В	0	-	8.1	23.1	35.80	0.09	0.6	0.9	0.0	1.0	0.2
11/16	1428	S	0	846	-	22.4	36.60	₩	0.1	0.8	5.5	1.2	0.4
		В	0	-	-	22.3	36.46	-	0.8	1.1	1.0	0.8	0.1
12/13	1420	S	0	•	-	22.0	35.36	0.00	-	1.8	10.5	2.3	0.5
1957		B	0	-	-	22.2	35.59	0.05	-	0.8	0.4	2.2	0.8
1/8	0841	S	0	-	-	19.1	35.91	0.05	_	0.7			
-, -		В	0	-	000	19.0	35.94	0.18	***	0.9			
2/5	0935	S	0		***	23.3	36.00	0.05	0.2	0.8	0.3	1.1	0.5
		В	0	-	_	23.5	36.00	0.12		0.6	0.3	0.0	0.4
4/22	1453	S	0	-	***	26.0	34.63	0.08					
5/16	0925	S	P	-	-	28.7	34.11	0.00	0.8	2.7	1.4	1.9	0.3
5/22	0850	S	0	~	-	30.3	36.27	0.00	•	3.1			
5/28	0920	S	0	-	-	30.2	35.03	0.86	0.6	2.2	1.0	1.5	0.5
6/3	1116	S	P	~	-	29.8	34.57	0.31					
6/11 6/17	1134 1052	S S	0 P	010	_	29.5 28.7	34.33 35.44	0.00					
				-	_		30.07	0.29	0, 4	1.5	2.3	1.8	1.4
6/20	0922	S	0	-	Que.	29.3	30.07	0.29	0, 4	1.5	2.3	1.8	1.4

	STATIO	ON B	41	Dep	th of	12 feet	26° 38	8' N		82°	04.1	W	
		S							P	0	NO-		
Date	Time	or	G. 1	oreve	рН	°C	Sal.	Cu.		4	NO^3	Car.	Pro.
		В	C.	M.	_				In.	Tot.	2		
1954													
4/2	0755	S	0	040	-	26.8	14.08						
1955	00.45	~	0			27 0	24.7/						
5/11	0847	S	0		-	27.9	34.76						
5/25	1620	S	0		-	30.4	35.11						
6/10	1245	S	0	0=0	-	29.5	36.02						
6/17	1110	S	0	-	-	27.8	30.92						
12/15 1957	1603	S	0	-	010	19.8	35.54						
5/8	0930	S	0	811	0=0	-	27.68						
	STATIC	ON E	3 42	Dep	th of	21 feet	26° 3	6.5' N		82°	13.31	W	
1954 6/2	1308	S	P	•	_	28.3	33.22						
0/2	1500	В	0	_	640	27.8	33.95						
11/2	1517	S	-	90		21.8	33.28						
11/2	1311	В	_	30	_	21.8	33.93						
11/24	1050	S	-	80	_	21.0	33.57						
1955	1030	9	_	00	_	_	33,3,						
2/10	1137	S	0	-		18.1	34.04						
1956		_				2.2	25 /0						
2/14	1305	S	0	-	010	21.0	35.60						
2/29	1300	S	0	₩	₩	19.1	36.14						
3/14	1124	S	0	-	-	25.0	36.24						
3/26	1420	S	0	040	-	19.8	36.57						
4/3	1225	S	0	-		23.0	36.06						
4/18	1445	S	0	•	•	23.0	36.50						
6/13	1357	S	0		-	27.6	37.87						
		В	0		-	27.5	37.88						
6/26	1505	S	0	-	-	29.9	37,53						
6/28	1046	S	0	-	otes	29.9	37.30						
		В	0	•	040	30.0	37.22						
7/2	1530	S	0	-	-	31.0	38.60						
7/17	1353	S	0	~=	-	31.0	37.46						
7/30	1458	S	0	_	ess	30.0	37.81						
8/6	1056	S	0	***	_	31.5	37.59						
8/13	1245	S	0	***	_	31.5	37.76						
8/27	1421	S	0			31.5	37.19						
9/4	1037	S	0	-	•	30.0	37.35						
9/13	0848	S	0	-	400	25.6	36.09						
9/24		S	0	199	-	27.6	36.73						
10/2	1325	S	0	0=0	-	28.0	36.00						
10/8	1100	S	0	-	etu	28.5	35.04						
10/17		S	0-0	0.2		25.0	36.69						
	,												

34.38

33.97

34.58

36.08

26.0

24.5

23.2

20.5

10/25

11/1

11/7

11/15 1235

S

S

S

S

0

0

0

P

1244

1205

1229

Date	Time	S	G. bi	reve	рН	°C	Sal.	Cu.	I	PO ₄	NO-	Car	Pro.
Date		В	C.	M.	F-11	Ü	D CILL	Ju	In.	Tot.	NO_2^3	Our.	100
11/19	1230	S	0	-	-	22.5	36.01						
11/26	1039	S	0	-	-	18.7	35.76						
12/3	1204	S	0		-	18.0	35.90						
12/11	1335	S	P	_	-	21.0	35.25						
12/21 1957	0925	S	0	-	-	22.7	36.37						
1/7	1428	S	0	200	-	19.7	35.85						
1/15	1110	S	0	240	-	20.5	35.76						
1/22	1244	S	0	₩	-	18.3	35.60						
1/23	1506	S	0	-	***	19.4	35.70						
		M	0	~	-	19.0	35.89						
		В	0		-	19.0	35.72						
1/23	1800	S	0	100		18.7	35.70						
		M	0	₩	-	18.9	35.85						
		В	0	-	-	19.0	35.78						
1/23	2100	S	0	-	-	19.0	35.81						
		M	0	←,	-	19.0	35.81						
		B	0	-	-	19.2	35.76						
1/23	2400	S	0	-	-	19.5	35.36						
		M	0	144	-	19.4	35.53						
		В	0	04	-	19.6	35.45						
1/24	0613	S	P	-	200	19.1	35.72						
		M	0	-	-	19.5	35.76						
		В	0	₩	-	19.5	35.90						
1/28	1341	S	P	000	-	22.0							
2/5	1047	S	0	000	240	24.0	35.85						
2/6	1715	S	0	-	140	22.5	35.91						
		В	P	160	-	22.8	36.04						
2/11	1035	S	P	-	-	23.5	35.91						
2/20	1257	S	0	-	-	21.7	35.87						
2/26	1130	S	0	***	010	21.5	35.69						
3/7	1458	S	0	-	-	21.3	34.34						
3/12	1150	S	0		-	19.5	35.00						
3/18	1425	S	P	246	-	22.0	35.24						
3/28	1303	S	P	-	-	22.2	34.75						
4/22	1453	S	0	-		26.0	34.63						
5/3	0958	S	0	per	-	27.2	34.83						
5/14	1525	S	0	-	200	29.0	35.23						
5/21	1051	S	0	-	210	30.0	34.21						
6/3	1116	S	P	-	-	29.8	34.57						
6/11	1134	S	0		-	29.5	34.33						
6/17	1052	S	P	***	-	28.7	35.44						
6/25	1342	S	0	-	-	**	31.38						

	STATIC	ON E	43	Dep	th of	39 feet	26° 36	6.21 N	82°	21 ^t W		
		S							PO	NO.		
Date	Time	or	G. b	oreve	рН	°C	Sal.	Cu.	4	2	Car.	Pro.
		В	C.	M.	-			In.	Tot.	NO		
1955												
8/8	1352	S	0	-	-	30.8	36.29					
		В	0	-	-	30.2	36.44					
8/9	1043	S	0		040	30.4	36.40					
1956	1506	S	0			27 7	37.04					
5/14	1506	В	0	•	_	27.7 27.0	37.04					
7/17	1500	S	0			31.0	37.48					
1/11	1300	В	0	•	-	30.5	37.38					
11/16	1247	S	P	_	-							
11/16	1441	В	P	••	_	22.8	36.80					
	am . m.					22.5	36.91	4 51 27	000	15 21 11		
1954	STATIC	DN B	44	Dep	th of	27 feet	26 34	4.5' N	82°	15.7' W	_	
8/12	1015	S	-	55	-	31.2	32.99					
8/23	1557	S	0		_	30.4	32.86					
0 / 20	100.	В	0	•	_	30.2	35.10					
11/24	1310	S		140	_		34.02					
,		В	P	••	_	••	34.33					
12/16	1015	S		250	-	17.5	35.14					
,		В	•••	200	-	17.5	35.16					
12/28	1354	S	-	500	-	17.9	34.60					
		В	-	55		17.3	34.83					
1955 8/8	1303	S	0	_	**	30.7	36.18					
0/0	1303	В	0	_	_	30.2	36.20					
8/9	0940	S	P	_	***	30.1	36.58					
8/17	1342	S	0	***	_	30.6	36.29					
0,2.		В	0		040	30.6	36.17					
12/1	1453	S	0	•••	•	20.3	35.81					
		В	0	_	-	20.8	35.81					
1956 6/28	1114	S	0		_	29.5	37.08					
0/20	1117	В	0	_	~	29.4	37.22					
1957	0000			_	_	19.0	35.90					
1/24	0900	S		-	-	18.4	35.90					
6/27	1015	B S	0	•••	-	30.3	35.69					
6/27	1015	B	0		-	30.1	35.58					
				_				121 27	020	22 21 11	7	
1954	STATIO	ON E	3 45	Der	oth of	54 feet	26 3	31 N	82	23.31 W	_	
2/16	1035	S	P	•••		19.0	35.03					
12/16	1411	S	***	3	-	18.2	35.53					
		В	•••	2	-	18.3	35.52					
12/22	1238	S	P	***	=	17.3	35.34					
		В	P	-	010	17.4	35.35					
1955 2/10	1402	S	0	_	_	18.5	35.81					
2/10	1102		0			17.6	35.99					
		В	U	940	-	71.0	550//					

		S							PO		NO-		
Data	Time	or	G.	breve	ρН	°C	Sal.	Cu.	_ `	4		Car	Pro.
Date	Time				PII	0	Jar.	_		Tab	NO 2	Car.	110.
0.100	1.40.4	В	C.	M.			2/ 55	1	n.	Tot.			
3/30	1404	S	0	-	-	21.0	36.55						
		В	0	-	-	21.1	36.44						
6/29	1617	S	0	_	_	31.5	36.75						
		В	0	-	-	30.5	36.68						
7/22	1033	S	0	_		29.4	36.87						
1/44	1033			_	_								
0.10	100/	В	0	***	-	28.8	36.83						
8/8	1336	S	0	-	-	30.7	36.29						
		В	0	-	010	30.3	36.31						
8/9	1025	S	0		-	30.2	36.26						
8/31	1303	S	0	-	***	30.3	36.55						
		В	0	_		30.2	36.64						
1956				_	_								
5/15	0857	S	0	**	_	26.7	36.95						
		В	0	99	diffe	26.6	36.88						
	OF A FILE			70				2 7 1 2		020	101 347		
1054	STATIC	JN E	46	Dep	th of	34 feet	26 3	2.7' N		02	18' W		
1954	1010	~	-			10 5	22 25						
2/16	1010	S	P	-	_	19.5	33.35						
6/2	1335	S	0	-		27.4	35.10						
		В	0	-	-	27.2	35.17						
6/10	1342	S	0	_	_	30.3	34.16						
4/24		В	0	**	-	28.5	35.35						
0/24	1220	S	0	-	-	28.7	34.33						
9/24	1230			-	-								
		В	0	•		28.8	34.51						
11/2	1613	S	-	500	-	23.7	33.06						
		В	_	160	-	23.0	34.90						
12/8	1615	S	_	400	**	19.2	35.23						
10,0		В	P	_	010	19.3	35.32						
12/22	1215												
12/22	1215	S	-	250	-	16.8	35.05						
1955		В	440	90	-	16.9	34.99						
2/15	1052	S	0	_	-	15.6	35.55						
2/13	1000	В	0	***	-	15.7	35.57						
2/20	1205				7.8	20.7	36.35	0.07					
3/30	1205	S	0	-									
		В	0	•	7.9	20.6	36.22	0.10					
6/28	1035	S	0	-	8.1	30.1	36.64	0.84					
		В	0		8.2	30.0	36.51	0.19					
7/22	0913	S	P	_	8.0	28.8	36.78	0.28					
1,00	0 / 1 3	В	0		8.0	30.0	36.96	0.06					
0/4	320/			-				0.60					
8/4	1306	S	0	-	-	30.0	35.88						
		В	0	-	-	30.0	36.36	0.49					
9/14	1425	S	0	#10	-	29.9	33.01	0.16	-	7.2			
		В	0	-	-	30.2	34.79	0.13	-	0.4			
9/29	1352	S	0	**	7.9	30.0	35.26		0.5	0.5	0.6	1.9	1.0
1167	1000	В	0		8.0	30.0	35.71	0.11		0.6	0.1	6.6	1.3
11/2	1214	S		-	8.0	24.4	35.30	0.08		-	-	5.3	2.4
11/3	1314		0	-						_	_	J. J	L, I
		В	0	-	8.0	23.7	35.37	0.15					

	SIAIIC		40 ((JOIII.C	1/								
		S							P	O ₄	NO-		
Date	Time	or	G. b	reve	рН	°C	Sal.	Cu.		4	3	Car.	Pro.
		В	C.	M.					In.	Tot.	NO_{2}		
1956 1/31	1120	S	0	_	-	17.4	35.38	0.07	-	-		1.1	0.9
1/31		В	0	-	_	17.0	36.04	0.04		2.3	-	1.1	0.5
3/15	1735	S	0	_	8.1	24.0	36.13	0.01	C.5	0.8			0,5
·		В	0		8.2	24.0	36.11	0.01	1.3	-	-	1.0	1.0
5/14	1525	S	0	-	8.1	27.8	37.13		0.2	0.5	0.0	0.6	0.0
-, -		В	0	**	8.1	27.5	37.23		0.1	0.5	2.3	1.0	0.0
6/13	1334	S	0	**	8.3	27.9	37.42	0.09		0.5	0.8	1.7	0.0
-,		В	0	_	8.4	27.5	37.19	0.09		1.0	0.0	2. 1	0.2
7/17	1522	S	0		8. 1	30.5	37.20	0.05	C40	0.0	0.3	1.0	0.0
.,		В	0	-	8. 1	30.2	37.16	0.06		0.2	0.2	1.0	0.3
9/13	1615	S	0		8.2	27.5	36.93	0.01		0.6	3.8	2.5	0.3
,,10	1015	В	0	000	8.2	26.7	37.10	0.04	-	0.5	0.3	0.9	0.0
11/16	1306	S	0	-	8.0	23.0	36.73	0.21		0.4	0.1	1.5	0.6
11,10	1300	В	0	-	8.1	22.7	36.80	0.17		0.5	0.0	1. 1	0.4
12/11	0933	S	P			19.4	35.91	0.06	0.4	0.5	1.6	1.8	0.0
	0 / 3 3	В	P		-	19.7	36.00	0.19		0.5	1.1	0.6	0.4
1957	1445												
1/10	1445	S	P	•		20.7	-	0.11		0.4	0.0	1.0	0.0
21/	2/45	В	P		-	19.5	2/ 00	0.41		0.5	0.8	0.9	0.3
2/6	1647	S	P	-	8.0	22.0	36.08	0.93		0.7	0.4	1.5	0.6
		В	0	•	8.0	20.9	36.05	0.24	-	1.3	0.3	0.3	0.8
	STATIC	ON B	47	Dep	th of	3 feet	26° 3	3.1' N	· _	82°	121 W		
1954 2/11	1415	S	P		_	20.4	34.87						
2/11	0947	S	P		_	19.5	32.65						
3/2	1210	S	P		_	17.8	33. 98						
3/18	0935	S	P	-	_	17.2	33.24						
4/8	1055	S	P	_		26.0	33.57						
4/0	1055	В	0		•••	26.0	33.56						
5/2	1215	S	P	•	•	29.5	30.50						
1956	1315	3	F	•••	-	47.5	50.50						
2/14	1315	S	0	_	-	20.5	35.58						
2/29	1310	S	0	_	-	19.4	35.97						
3/14	1131	S	0	•	-	25.0	36.33						
3/26	1430	S	0	-	-	19.8	36.66						
4/3	1233	S	0	-	-	23.0	36.95						
4/18	1450	S	0	-	-	22.9	36.61						
6/26	1511	S	0	••		30.9	37.82						
7/2	1510	S	0		-	31.0	38.42						
7/17	1359	S	0	-	-	31.3	37.92						
7/30	1508	S	0	_	-	31.0	37.72						
8/6	1104	S	0	-	_	31.7	37.63						
8/13	1250	S	0	-	_	31.5	39.18						
8/27	1432	S	0	-	_	31.0	37.34						
,													

				00110	·								
		S							P	04	NO ₃		
Dat	e Time	or	G. b	reve	рΗ	°C	Sal.	Cu.		4	3 NO	Car.	Pro.
		В	C.	M.					In.	Tot.	NO ₂		
9/4	1045	S	0	_	-	30.0	37.94						
9/1	3 0855	S	0	-	_	26.0	36.44						
9/2	4 1204	S	0	_	_	28.0	35.56						
10/2	1330	S	0	_	_	28.0	36.00						
10/8	1114	S	0		***	27.1	34.63						
10/1		S	P	-		24.7	35.50						
10/2		S	P	_	-	25.6	35.55						
11/1		S	0	_	_	24.5	35.65						
11/7		S	0	-		23.5	36.05						
11/1		S	P	_	_	21.7	36.48						
11/19		S	0		-	22.2	36.35						
11/2		S	0	-	-	18.5	36.20						
12/3		S	0	_	_	18.0	35.93						
12/1		S	0	_		21.2							
12/2		S	0	-	-		35.82						
1957	. 0000	3	U	-	-	22.5	34.72						
1/9	1435	S	0	_	-	20.0	35.90						
1/19		S	P	-	_	20.5	35.83						
1/22		S	0	_	**	18.5	36.10						
1/28		S	0	_	-	21.5	36.01						
2/5	1053	S	0	-	_	24.0	35.55						
2/1		S	0	_	_	23.5	36.01						
2/20		S	0	_	_	22.0	36.15						
2/26		S	0	_	_	21.5	35.34						
3/7	1504	S	0	_	_	21.3	34.47						
3/12		S	P	_		19.5	35. 18						
3/18		S	0	-	-	22.2							
4/17		S	0	_	-	23.5	35.18						
5/3	1004	S		-	-		35.06						
5/7			0	-	•••	27.0	35.03						
	1312	S	0	-	-	25.5	33.70						
5/14		S	0	-	-	29.0	35.28						
5/2]		S	0	**	-	30.5	34.18						
6/3	1122	S	0	-		29.5	33.58						
6/11		S	0	-	-	29.5	35.71						
6/17		S	0	-	-	28.5	33.01						
6/25	1348	S	0	-	-	-	30.82						
	STATI	ON B	48	Dept	th of	7 feet	26° 3	3.4' N		82° 1	1 t W		
1955													
3/28	1300	S	0	-	7.9	20.1	35.59	0.20					
1/2/	1120	В	0	-	8.0	19.9	35.70	0.17					
4/26	1138	S	0	-	8.0	27.2	36.58	0.06					
7 (20		В	0		8.1	27.5	36.60	0.08					
7/18	3 1312	S	0	***	8.0	32.1	30.34	0.09					
- 1-		В	0	***	8.0	30.7	35.64	0.00					
7/20	1828	S	0	-	8.2	30.1	29.45	0.05					

		S							P		NO-		
Date	Time	or	G. 1	oreve	рН	°C	Sal.	Cu.		4	3	Car.	Pro.
		В	C.	M.					In.	Tot.	NO ₂		
8/2	1101	S	0	_	-	28.9	27.94	0.21					
		В	0	_	-	29.4	34.47	0.18					
8/16	1053	S	0	-	-	30.6	34.78	0.06					
		В	0	-	-	30.6	35.95	0.12					
8/24	1612	S	0	-	-	32.0	30.91	0.15					
		В	0	-	-	31.5	33.26	0.24					
9/12	1316	S	0	-	-	31.2	24.54	_	-	0.7			
9/27	1240	S	0	-	7.9	29.2	26.15	-	0,8	1.5	1.9	2.7	3.0
11/1	1327	S	0	-	8.1	23.0	34.56	0.08					
12/7	0923	S	P	-	8.1	20.7	35.00	0.32	_	~	-	1.0	10.0
1956		В	P	_	8.1	20.9	34.84	0.24	-	-	-	12.8	3.1
2/2	1306	S	0	-		20.5	35.01	-	0.1	0.1	-	1.0	1.5
		В	0	-	₩	20.3	35.01	0.10	1.0	2.1	-	0.2	5.2
3/14	0832	S	0	-	8.0	24.4	36.24	0.09	0.4	0.6	-	0.9	0.5
		В	0	-	8.0	24.5	36.14	0.09	0.9	1.6	-	1.8	1.1
5/9	0857	S	0	-	8.1	27.2	37.27	0.04	0.8	1.1	0.3	2.3	0.0
		В	0	-	8.1	27.3	37.56	0.00	-	4.2			
6/7	0900	S	0	-	8.4	28.3	37.37	0.04	0.3	0.8	0.5	1.2	0.0
		В	0	_	8.4	27.9	37.45	0.04	0.2	0.5	0.0	1.0	0.0
7/13	0800	S	0	-	8.1	29.2	38.13	0.18	1.2	1.6	0.9	1.6	0.4
		В	0	-	8.1	29.1	38.06	0.13	1.4	2.1	0. 5	2.0	0.2
9/6	1230	S	0	-	8.2	29.5	37.01	0.01	0.7	0.9	8.7	1.0	0.3
		В	0	-	8.3	28.5	37.37	0.00	0.9	1.2	0.3	1.6	0.3
10/30	0845	S	0	-	7.9	23.2	35.54	0.20	0.5	1.1	0.2	2.1	0.1
		В	0	•	8.0	23.0	35.54	0.06	1.0	1.0	0.3	-	0.5
11/16	1445	S	0	-	-	22.1	35.11	0.56	0.5	0.9	4.0	1.3	0.8
		В	0	_	-	22.3	36.11	0.08	-	0.9	0.0	0.2	0.3
12/13	1438	S	0	-	-	22.5	35.10	0.09	-	0.3	0.1	-	1.2
1957		В	0	_	-	22.5	35.46	0.07	1.2	1.9	3.4	-	0.6
1/8	0822	S	0		-	19.4	35.69	0.00	-	3.1			
		В	0	-	-	19.4	35.98	0.08	-	1.1	0.1	-	0.2
2/5	0913	S	0	-	8.0	24.0	35.80	0.00	0.1	0.6	0.4	1.6	0.7
		В	0	_	8.1	24.0	35.60	0.00		0.7	0.3	0.8	1.1
3/28	1106	S	P	-	-	22.0	34.60	0.06	-	0.8	0.7	1.6	0.9
4/12	1357	S	0	-	-	26.3	34.08	0.08	0.5	0.8	1.0	0.7	1.1
4/22	1347	S	0	-	•	26.2	32.78	0.08					0.0
5/16	0935	S	0	-	-	29.0	33.94	0.00		1.2	0.8	1.5	0.0
5/22	0855	S	0	_	-	30.0	34.48	0.03		2.3	0 5		0 0
5/28	0930	S	P	_	-	30.2	33.57	0.41	0.5	1.4	0.2	1. 1	0.8
6/3	1122	S	0	-	-	29.5	33.58	0.14					
6/11	1140	S	0	-	-	29.5	35.71	0.01					
6/17	1057	S	0	-	-	28.5	33.01	0.05	0.	1 0	0 0		1 /
6/20	0920	S	0	-	-	29.5	29.03	0.05	0.1	1.0	0.3	-	1.6

K		STATIC	ON B	49	Dep	th of	12 feet	26° 3	1.61 N		81°	59.71 W		
ľ			S							P	0	NO		
	Date	Time	or		breve	рН	°C	Sal.	Cu.		4	3 NO	Car.	Pro.
Į,			_B_	C.	M.					In.	Tot.	NO ₂		
P	1957 5/16	1129	S	0	_	_	28.8	16.40	0.02	ma	2.0			
	3/10	1127	В	0	-	_	28.7	26.47	0.02	-	1.6			
	5/22	1045	S	0	_	_	31.0	12.74	0.06	_	2.7			
	3/22	1013	В	0	_	_	30.6	25.87	0.00	_	5.9			
	5/28	1046	S	0		_	30.2	18.06	0.02	_	2.4			
	3,20	2010	В	0	_	_	30.5	25.52	0.02	_	2.8			
	6/6	1340	S	0	-	_	30.8	9.73	0.54	_	10.0			
	0,0		В	0	_	_	30.7	9.94	0.41	_	8.6			
	6/12	1215	S	0	_	_	29.8	10.44	0.14	-	8.5			
	0,		В	0	_	-	29.6	19.75	0.38	-	3.2			
	6/20	1205	S	0	_	-	29.9	6.83	0.12	-	2.1			
	-,		В	0	_	_	30.0	9.04	0.10	-	1.7			
		STATIC		50	Dep	th of	12 feet		33.51 N			55.91 W		
]	957									_			•	
	1/30	1424	S	0	_	8.0	23.9	26.29 26.93	0.09					
	E/14	1155	B S	0	-	8.0	29.3	6.56	0.00	_	3.6			
	5/16	1155	В	0	~	_	28.0	12.13	0.06	_	4.7			
	5/22	1110	S	0	_	_	31.0	3.86	0.00	_	4.1			
	3124	1110	В	0	-	_	30.5	3.92	0.00	_	5.2			
	5/28	1109	S	0	_	_	30.5	3.14	0.02	-	4.9			
	3/20	110/	В	0		-	30.1	6.00	0.00	_	7.0			
	6/6	1315	S	0	_	_	30.8	1.82	0.11	_	8.1			
	0,0	1010	В	0	_	_	30.0	2.18	0.54	_	9.4			
	6/12	1155	S	0	_	-	28.0	0.40	0.19	_	11.2			
	0, ==		В	0	-	_	29.0	0.40	0.14	-	12.6			
	6/20	1150	S	0	-	_	30.0	0.10	0.10	_	1.2			
	-,		В	0	_	-	29.5	4.14	0.23	_	3.1			
		STATIO			Der	th of	8 feet		8.81 N			52¹ W		
	1955									-				
	3/24	0655	S	0	_	7 4	23.9	11.65	0.44					
	5/31		S	0	-	7.4		20.70	0.23					
	7/21	1520	S	0	-	_	29.6	0.05	0.03					
	7/27	1455	S	0	-	_	31.7	0.00	0.40					
	8/2	1515	S	0	_	~	30.8	0.23	0.76					
	8/11	1500	S	0	~	_	31.1 30.4	0.13	0.14					
	8/24 9/15	1520 1515	S S	0	-	7.6	31.0	0.10	0.02	_	6.4			
	9/15	1125	S	0	_	-	29.8	1.35	0.20				9.0	12.6
	9/30	1505	S	0	_	-	29.9	1.89	0.08					11.5
	10/6	1515	S	0	_	_	30.2	-		_			0,0	
	11/1	1140	S	0	***	_	22.5	12.92	0.28				11.2	10.2
	11/4	1525	S	0	_	7.7		25.37	0.24					4.3
	11/16	1430	S	0	-	~	24.5	17.34	0.09					
	11/30	1515	S	0	_	7.8		15.03	0.19					
	11/30	1010	D	V	_				- /					

		S						_	P	0,	NO-		
Date	Time	OI	_	261.6	DH	°C	Sal.	Cu.		-	3	Car.	Pro.
		3	C.	M1.					In.	Tot.	NO ₂		
12/8	1500	S	0	-	7.5	23.5	_	0.23	1.2	1.5			
12 12	1050	S	0	_	_	17.0	15.03	0.20	2.2	3.2		2.5	8.5
12/29	1305	S	0	_	7.8	20.5	20.14	0.18		٥			0.5
1950	- 200	2	O	-	. 0	-0.0	20.17	0.10					
1/5	1755	S	0	_	S. 0	15,5	17.51	0.25					
1 11	1450	S	0		7.5	13.5	20,07	0.18					
1/12	1755	S	0	_	7.4	13.5	10.13	0.03					
1/25	1800	5	0	_	7.5	15.5	19.91	0.00					
1/51	0915	S	0	_	_	19.5	20.35	0.04	_	9.7	_	2.5	
		S			7. S								
3 17	1325		0	-		25.2	23.40	0.00	-	~	-	2.9	0.5
4/11	0955	S	0	-	S. 1	21.3	27.87	0.00	4,4	5.9	-	3.5	0.9
5/8	1100	S	0	-	8.0	28.7	25.20	0.05					
5 9	0345	S	0	-	7.5	27.0	19.50	0.04	-	4.1	0.3	3.0	
5/22	1430	S	0	-	-	30.5	23.19	0.12					
0 0	1740	S	0	-	-	30.1	26.53	0.01	2.1	5.5	0.4	0.7	0.0
7/2	1347	S	0	-	7.7	30.2	20.00	0.14					
7/13	1525	S	0	-	7.8	33.5	18.92	0.10	1.0	3.7	0.1	3,2	1.2
5 30	1820	S	0	_	_	-	10.41	0.02	3.3	0.5	1.2	4.7	1.6
10/29	1801	S	0	_	8.5	25.0	3.80	0.14	3.0	4.5	0.4	9.2	3.8
12/10	1845	S	5	_	_	22.7	14.54	0.07	3.7	6.3	2.2	2.4	3.2
1957	2020												
1/8	1003	S	0	_	7.9	20.1	12.80	0.14	3.8	0.4	4.5	4.5	3.3
2/7	1715	S	0	-	8.5	25.1	19.48	0.09	~	4.1	3.0	2.0	3.3
3/28	0820	S	0	-	7.8	21.2	1.80	0.04	4,4	0.2	4.3	3.9	5.9
4,11	0855	S	0	_	7.7	26.0	5.21	0.12	2.9	5.4	1.3	2.2	4 4
4/24	1040	S	0	_	8.1	25.5	_	0.09					
5/10	1223	S	0	_	-	33.2	0.50	0.12	2.2	5.0	1.0	5.4	1.1
-,		3	0	_	_	28.2	11.39	_	_	23.2			
5/22	1205	S	0	_	_	30.5	0.50	0.01	3.0	5.4	3.9	_	5.0
		3	0	_	_	29.5	1.08	0.02	_	19.9	3,		
= 120	7 7 ~ ~~					30.9	0.30	0.09	2.0	5.5	0.1	2.8	
5/25	1137	S	0	_	-			0.22		3.4	0. 1	2.0	
111-	1 / 1 1	В	0	-	_		0.40		-	2. =			
b 5	1411	S	0	~	-	31.5	0.20	0.07	, -			1.2	
5 5	1220	S	0	_	_	30.0	0.20	0.11	1. (-	_	4.2	
		Б	0	-	-	29.7	0.30	0.08					
5 12	1120	S	0	-	-	29.5	0.20	0.38			3.2	-	1.7
		В	0	-	-	23.5	0,40	0.47					
5 20	1115	S	0	-	-	30.0	0.20				1.3	3.8	8.3
		В	0	-	-	29.5	0.30	0.00	-	12.0			
	STATIC) ' =	3 52	Den	ים לד	9 feet	26 = 4	1. 01 N		81°	48.91	W	
1957	0-1111			200	0-	, 2003						_	
1/30	1547	S	0	-	7.9	25.7	13.87	0.00					
		В	0	_	7.9	25.5	15.75	0.00					
5/10	1255	S	0	_	_	28.1	0.10	0.02	-	2.8			
		В	0			23.0	0.20	0.00		16.8			
			0	_	_		00	0,00					

		~							70.		NIO		
		S							P	4	NO-	_	_
Date	Time	or			рН	°C	Sal.	Cu.			NO 2	Car.	Pro.
		В	C.	M.					In.	Tot.	2		
5/22	1234	S	0			30.9	0.20	0.00	_	2.6			
		В	0	_		30.1	0.60	0.00	_	3.3			
5/28	1203	S	0	648	_	31.5	0.20	0.10	••	1.8			
3,20		В	0	***		29.9	0.30	0.11		3.8			
6/6	1200	S	0			29.5	0.20	0.09	_	6. 1			
0/0	1200	В	0			29.0	-	0.07	_	9.8			
(/12	1100	S			848								
6/12	1100		0	-		28.6	0.30	0.41	-	14.3			
		В	0	0-0	6-0	28.1	0.20	0.59	-	12.5			
6/20	1055	S	0	-	-	31.0	0.10	0.10	-	0.6			
		В	0	-	***	29.5	0.40	0.15		5.0			
1957	STATIC	ON E	3 53	Dep	th of	15 feet	26° 4	3.41 N	Ī	81°	42.71 W		
5/16	1335	S	0		_	28.2	0.20	0.02				-	
		В	0	_	_	28.0	0.20	0.08	-	8.2			
5/22	1410	S	0	0-0	_	30.6	0.10	0.08	1.5	4.6	2.8	0-0	0.7
5/66	1110	В	0			31.2	0.20	0.00		5.6	2.0		
5/28	1235	S	0	_	_	30.2	0.20	0.05	_	J. U	0.0		
3/40	1433			-	-			0.07			0.0		
/ 1/	1110	В	0	_	••	29.8	0.20		- 1	2.4	0 1		
6/6	1110	S	0	-	-	29.7	0.60	0.07	1. 1	-	0.1		
		В	0	0.0	-	29.7	0.30	0.11		8.3		- 0	0 (
6/12	1035	S	0	-	-	27.5	0.20	0.16		-	000	5.3	8.6
		В	0	•	-	27.6	-	0.08	•	11.3			
6/20	1030	S	0	040	-	29.5	0.10	0.05	0.8	1.3	0.8	3.5	7.6
		В	0	-	-	29.5	0.40	***	-	1.7			
	STATIO	ON F	3 54	Der	oth of	14 feet	26°	42.811	J	81°	36.71 W		
1957				201					<u> </u>			-	
1/30	1651	S	0		8.1	23.5	1.20	0.00					
		В	0	-	8.1	23.2	2.10	0.10					
5/16	1230	S	0	•	-	26.6	-	0.06	-	7.2			
5/22	1430	S	0	0-0		30.3	0.20	0.19	-	2.4			
5/28	1420	S	0	-	***	31.0	0.20	0.08	0.0	2.2			
6/12	1400	S	0	_	-	28.4	0.20	0.43	•	15.4			
6/20	1340	S	0	_	-	30.0	0.20	0.02	-	2.6			
.,				D	-414			14.7' N	T	810	30.71 W		
1957	STATIO	OIN I	2 22	Del) [11 O]	12 feet	20	x x + 1 1,	-	01	30.1 11	-	
5/16	1255	S	0	_	-	26.5	0.10	0.08	648	4.4			
5/22	1400	S	0	-	_	31.3	0.10	0.16		7.0			
5/28	1400	S	0	-	_	30.5	0.30	0.00	-	2.0			
6/6	1440	S	0	840	_	29.5	0.30	0.15	_	10.6			
6/12	1345	S	0		_	30.0	0.20	0.10	040	4.7			
		S	0	-	_	31.0	0.20	0.08		1.2			
6/20	1315				6+0				_		25 51 777		
1055	STATI	ON I	B 56	Dej	oth of	f 12 feet	26	45.7' N	-	81,	25.51 W	_	
1955 3/25	1019	S	0		7.6	25.4	0.00	0.32					
				_	0	28.8	0.00	0.20					
6/30	0940	S	0	_	640		0.05	0.44					
8/2	1230	S	0	-	-	29.7	0.05	0.44					

$\begin{array}{ c c c c c c c c c c c c c c c c c c c$			S							DC		NIO		
No.		(TT) 1		~	,		0.0	<i>a</i> 1		PC	4	NO-		
9/15 1040 S 0 - 7.6 30.3 0.10 0.13 - 11.1 9/30 1200 S 0 - 7.6 29.8 0.20 0.13 - 1.1.1 9/30 1200 S 0 - 7.6 29.8 0.20 0.13 3.5 15.5 11/4 1140 S 0 - 8.0 23.1 0.20 0.13 5.0 11.1 12/12 1137 S 0 20.0 - 0.21 1956 1/12 1445 S 0 - 8.1 14.8 0.20 0.03 3/7 1446 S 0 - 8.0 25.4 0.20 0.04 1.9 4/11 1045 S 0 - 8.3 22.2 0.60 0.02 2.9 5/9 1047 S 0 - 8.3 27.0 0.40 0.04 - 1.0 0.1 5.3 2.3 6/6 1315 S 0 - 8.1 31.4 0.10 0.04 2.0 4.2 0.0 18.4 1.8 7/12 1315 S 0 - 8.1 31.4 0.10 0.04 2.0 4.2 0.0 18.4 1.8 7/12 1315 S 0 - 8.1 31.4 0.10 0.04 2.0 4.2 0.0 18.4 1.8 7/12 1315 S 0 - 8.1 31.4 0.10 0.04 2.0 4.2 0.0 18.4 2.1 8/30 1115 S 0 - 7.8 - 0.50 0.04 0.9 2.7 2.6 3.2 2.6 10/29 1140 S 0 - 7.8 - 0.50 0.04 0.9 2.7 2.6 3.2 2.6 10/29 1140 S 0 24.8 0.10 0.03 6.0 6.9 - 5.5 11/16 0727 S 0 - 7.8 20.4 - 0.20 1.8 7.0 5.0 3.9 5.5 12/10 1159 S 0 - 8.1 24.2 0.20 0.02 6.6 3.1 5.7 1957 1/8 1045 S 0 - 8.1 24.3 0.20 0.16 B 0 - 8.1 24.3 0.20 0.16 B 0 - 8.1 24.3 0.20 0.16 B 0 - 8.1 24.2 0.40 0.13 2/7 0.850 S 0 - 7.6 23.5 0.20 0.10 1.6 2.6 0.0 2.4 5.8 3/28 0945 S 0 - 7.6 23.5 0.20 0.10 0.07 - 6.4 5.5 4.7 0.5 4/11 1030 S 0 - 8.1 26.2 0.30 0.05 1.5 5.2 0.9 - 7.8 5/16 1330 S 0 26.7 0.20 0.08 2.7 - 4.7 4.3 5.2 5/22 1330 S 0 31.3 0.20 0.10 0.07 - 6.4 5.5 4.7 0.5 4/11 1030 S 0 - 8.1 26.2 0.30 0.05 1.5 5.2 0.9 - 7.8 5/16 1330 S 0 26.7 0.20 0.08 2.7 - 4.7 4.3 5.2 5/22 1330 S 0 29.5 0.10 0.12 6/12 1330 S 0 29.5 0.10 0.12 6/12 1330 S 0 29.5 0.10 0.12 6/12 1330 S 0 29.5 0.10 0.12 6/20 1230 S 0 31.5 0.20 0.10 0.7 2.2 0.1 4.1 8.6 6/20 1230 S 0 31.5 0.20 0.10 0.7 2.2 0.1 4.1 8.6	Date	Time				рН	30	Sal.				NO	Car.	Pro.
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$				C.	М.					In.		2,		
$\begin{array}{c ccccccccccccccccccccccccccccccccccc$	9/15	1040	S	0	_	7.6	30.3	0.10	0.13	_	11.1			
12/12	9/30	1200	S	0	_	7.6	29.8	0.20	0.13	_	-	-	3.5	15.5
12/12	11/4	1140	S	0	-	8.0	23.1	0.20	0.13	-	_	-	5.0	11.1
1956 1/12 1445 S 0 - 8.1 14.8 0.20 0.03 3/7 1446 S 0 - 8.0 25.4 0.20 0.04 1.9 4/11 1045 S 0 - 8.3 22.2 0.60 0.02 2.9 5/9 1047 S 0 - 8.3 27.0 0.40 0.04 - 1.0 0.1 5.3 2.3 6/6 1315 S 0 - 8.1 31.4 0.10 0.04 2.0 4.2 0.0 18.4 1.8 7/12 1315 S 0 - 8.4 30.8 0.10 0.02 4.5 5.0 0.2 4.4 2.1 8/30 1115 S 0 - 7.8 - 0.50 0.04 0.9 2.7 2.6 3.2 2.6 10/29 1140 S 0 - 7.8 20.4 - 0.20 1.8 7.0 5.0 3.9 5.5 11/16 0727 S 0 - 7.8 20.4 - 0.20 1.8 7.0 5.0 3.9 5.5 11/16 0727 S 0 - 7.8 20.4 - 0.20 1.8 7.0 5.0 3.9 5.5 12/10 1159 S 0 - 8.2 19.5 0.70 0.02 1.9 2.7 0.3 4.2 6.3 1/30 1756 S 0 - 8.1 24.3 0.20 0.16 B 0 - 8.1 24.3 0.20 0.16 B 0 - 8.1 24.2 0.40 0.13 2/7 0850 S 0 - 7.6 23.5 0.20 0.10 1.6 2.6 0.0 2.4 5.8 3/28 0945 S 0 - 7.9 23.0 0.10 0.07 - 6.4 5.5 4.7 0.5 4/11 1030 S 0 - 8.1 26.2 0.30 0.05 1.5 5.2 0.9 - 7.8 5/16 1330 S 0 - 8.1 26.2 0.30 0.05 1.5 5.2 0.9 - 7.8 5/16 1330 S 0 - 0 - 31.3 0.20 0.10 0.2 6/12 1330 S 0 - 0 - 31.3 0.20 0.10 0.2 6/12 1330 S 0 - 0 - 31.5 0.20 0.10 0.2 STATION B 57 Depth of 11 feet	12/12	1137	S	0	_				0.21					
1/12														
A 11		1445	S	0	-	8.1	14.8	0.20	0.03					
5/9 1047 S 0 - 8.3 27.0 0.40 0.04 - 1.0 0.1 5.3 2.3 6/6 1315 S 0 - 8.1 31.4 0.10 0.04 2.0 4.2 0.0 18.4 1.8 7/12 1315 S 0 - 8.4 30.8 0.10 0.02 4.5 5.0 0.2 4.4 2.1 8/30 1115 S 0 - 7.8 - 0.50 0.04 0.9 2.7 2.6 3.2 2.6 10/29 1140 S 0 - - 24.8 0.10 0.03 6.0 6.9 - 5.5 11/16 0727 S 0 - 7.8 20.4 - 0.20 1.8 7.0 5.0 3.9 5.5 11/16 0727 S 0 - 8.1 24.4 - 0.20 0.02 - 6.6 3.1 5.5 12/10 1155 S 0<	3/7	1446	S	0	-	8.0	25.4	0.20	0.04	-	-	-	1.9	
6/6 1315 S 0 - 8.1 31.4 0.10 0.04 2.0 4.2 0.0 18.4 1.8 7/12 1315 S 0 - 8.4 30.8 0.10 0.02 4.5 5.0 0.2 4.4 2.1 8/30 1115 S 0 - 7.8 - 0.50 0.04 0.9 2.7 2.6 3.2 2.6 10/29 1140 S 0 - 7.8 20.4 - 0.20 1.8 7.0 5.0 3.9 5.5 12/10 1159 S 0 - 7.8 20.4 - 0.20 1.8 7.0 5.0 3.9 5.5 12/10 1159 S 0 - 21.2 0.20 0.02 - 6.6 3.1 5.7 1/957 1/8 1045 S 0 - 8.2 19.5 0.70 0.02 1.9 2.7 0.3 4.2 6.3 1/30 1756 S 0 - 8.1 24.3 0.20 0.16 B 0 - 8.1 24.2 0.40 0.13 2/7 0850 S 0 - 7.6 23.5 0.20 0.10 1.6 2.6 0.0 2.4 5.8 3/28 0945 S 0 - 7.9 23.0 0.10 0.07 - 6.4 5.5 4.7 0.5 4/11 1030 S 0 - 8.1 26.2 0.30 0.05 1.5 5.2 0.9 - 7.8 5/16 1330 S 0 - 8.1 26.2 0.30 0.05 1.5 5.2 0.9 - 7.8 5/16 1330 S 0 - 26.7 0.20 0.08 2.7 - 4.7 4.3 5.2 5/22 1330 S 0 - 31.3 0.20 0.10 2.6 5.2 1.6 5.1 5/28 1340 S 0 - 29.5 0.10 0.12 6/12 1330 S 0 - 29.5 0.10 0.12 6/12 130 S 0 - 29.5 0.10 0.12 6/	4/11	1045	S	0	-	8.3	22.2	0.60	0.02	-	-	-	2.9	
6/6 1315 S 0 - 8.1 31.4 0.10 0.04 2.0 4.2 0.0 18.4 1.8 7/12 1315 S 0 - 8.4 30.8 0.10 0.02 4.5 5.0 0.2 4.4 2.1 8/30 1115 S 0 - 7.8 - 0.50 0.04 0.9 2.7 2.6 3.2 2.6 10/29 1140 S 0 - 7.8 20.4 - 0.20 1.8 7.0 5.0 3.9 5.5 12/10 1159 S 0 - 7.8 20.4 - 0.20 1.8 7.0 5.0 3.9 5.5 12/10 1159 S 0 - 21.2 0.20 0.02 - 6.6 3.1 5.7 1/957 1/8 1045 S 0 - 8.2 19.5 0.70 0.02 1.9 2.7 0.3 4.2 6.3 1/30 1756 S 0 - 8.1 24.3 0.20 0.16 B 0 - 8.1 24.2 0.40 0.13 2/7 0850 S 0 - 7.6 23.5 0.20 0.10 1.6 2.6 0.0 2.4 5.8 3/28 0945 S 0 - 7.9 23.0 0.10 0.07 - 6.4 5.5 4.7 0.5 4/11 1030 S 0 - 8.1 26.2 0.30 0.05 1.5 5.2 0.9 - 7.8 5/16 1330 S 0 - 8.1 26.2 0.30 0.05 1.5 5.2 0.9 - 7.8 5/16 1330 S 0 - 26.7 0.20 0.08 2.7 - 4.7 4.3 5.2 5/22 1330 S 0 - 31.3 0.20 0.10 2.6 5.2 1.6 5.1 5/28 1340 S 0 - 29.5 0.10 0.12 6/12 1330 S 0 - 29.5 0.10 0.12 6/12 130 S 0 - 29.5 0.10 0.12 6/	5/9	1047	S	0	-	8.3	27.0	0.40	0.04	-	1.0	0.1	5.3	2.3
7/12 1315 S 0 - 8.4 30.8 0.10 0.02 4.5 5.0 0.2 4.4 2.1 8/30 1115 S 0 - 7.8 - 0.50 0.04 0.9 2.7 2.6 3.2 2.6 10/29 1140 S 0 - 24.8 0.10 0.03 6.0 6.9 - 5.5 11/16 0727 S 0 - 7.8 20.4 - 0.20 1.8 7.0 5.0 3.9 5.5 12/10 1159 S 0 - 21.2 0.20 0.02 6.6 3.1 5.7 1957 1/8 1045 S 0 - 8.2 19.5 0.70 0.02 1.9 2.7 0.3 4.2 6.3 1/30 1756 S 0 - 8.1 24.3 0.20 0.16 B 0 - 8.1 24.2 0.40 0.13 2/7 0850 S 0 - 7.6 23.5 0.20 0.10 1.6 2.6 0.0 2.4 5.8 3/28 0945 S 0 - 7.9 23.0 0.10 0.07 - 6.4 5.5 4.7 0.5 4/11 1030 S 0 - 8.1 26.2 0.30 0.05 1.5 5.2 0.9 - 7.8 5/16 1330 S 0 - 8.1 26.2 0.30 0.05 1.5 5.2 0.9 - 7.8 5/16 1330 S 0 - 26.7 0.20 0.08 2.7 - 4.7 4.3 5.2 5/22 1330 S 0 - 31.3 0.20 0.10 2.6 5.2 1.6 5.1 5/28 1340 S 0 - 30.7 0.10 0.02 2.3 4.4 0.0 6.1 4.7 6/6 1415 S 0 - 29.5 0.10 0.12 6 5.2 1.6 5.1 5/28 1340 S 0 - 29.5 0.10 0.12 6 5.2 1.6 5.1 5/28 1340 S 0 - 29.5 0.10 0.12 6 5.2 1.6 5.1 5/28 1330 S 0 - 29.5 0.10 0.12 6 5.2 1.6 5.1 5/28 1340 S 0 - 29.5 0.10 0.12 6 5.2 1.6 5.1 5/28 1340 S 0 - 29.5 0.10 0.12 6 5.2 1.6 5.1 5/28 1340 S 0 - 29.5 0.10 0.12 6 5.2 1.6 5.1 5/28 1340 S 0 - 29.5 0.10 0.12 6 5.2 1.6 5.1 5/28 1340 S 0 - 29.5 0.10 0.12 6 5.2 1.6 5.1 5/28 1340 S 0 - 29.5 0.10 0.12 6 5.2 1.6 5.1 5/28 1340 S 0 - 29.5 0.10 0.12 6 5.2 1.6 5.1 5/28 1340 S 0 - 29.5 0.10 0.12 6 5.2 1.6 5.1 5/28 1340 S 0 - 29.5 0.10 0.12 6 5.2 1.6 5.1 6/20 1230 S 0 - 29.5 0.10 0.12 6 5.2 1.6 5.1 6/20 1230 S 0 - 29.5 0.10 0.12 6 5.2 0.0 0.1 4.1 8.6 6/20 1230 S 0 - 28.1 25.88 8 8 P - 28.0 25.95			S	0	-	8.1			0.04	2.0	4.2	0.0		
8/30 1115 S 0 - 7.8 - 0.50 0.04 0.9 2.7 2.6 3.2 2.6 10/29 1140 S 0 - 24.8 0.10 0.03 6.0 6.9 - 5.5 11/16 0727 S 0 - 7.8 20.4 - 0.20 1.8 7.0 5.0 3.9 5.5 12/10 1159 S 0 - 21.2 0.20 0.02 - 66.6 3.1 5.7 1957 1/8 1045 S 0 - 8.2 19.5 0.70 0.02 1.9 2.7 0.3 4.2 6.3 1/30 1756 S 0 - 8.1 24.3 0.20 0.16 B 0 - 8.1 24.3 0.20 0.16 B 0 - 8.1 24.2 0.40 0.13 2/7 0850 S 0 - 7.6 23.5 0.20 0.10 1.6 2.6 0.0 2.4 5.8 3/28 0945 S 0 - 7.9 23.0 0.10 0.07 - 6.4 5.5 4.7 0.5 4/11 1030 S 0 - 8.1 26.2 0.30 0.05 1.5 5.2 0.9 - 7.8 5/16 1330 S 0 - 8.1 26.2 0.30 0.05 1.5 5.2 0.9 - 7.8 5/16 1330 S 0 - 26.7 0.20 0.08 2.7 - 4.7 4.3 5.2 5/22 1330 S 0 - 31.3 0.20 0.10 2.6 5.2 1.6 5.1 5/28 1340 S 0 - 30.7 0.10 0.00 2.3 4.4 0.0 6.1 4.7 6/6 1415 S 0 - 29.5 0.10 0.12 6/12 1330 S 0 - 31.5 0.20 0.10 0.12 6/12 1330 S 0 - 31.5 0.20 0.10 0.12 6/12 1330 S 0 - 29.6 0.20 0.10 0.7 2.2 0.1 4.1 8.6 5/16 1230 S 0 - 29.5 0.10 0.12 6/20 1230 S 0 - 28.1 25.88 B P - 28.0 25.95														
$ \begin{array}{c ccccccccccccccccccccccccccccccccccc$														
11/16 0727 S 0 - 7.8 20.4 - 0.20 1.8 7.0 5.0 3.9 5.5 12/10 1159 S 0 - 21.2 0.20 0.02 6.6 3.1 5.7 1957 1/8 1045 S 0 - 8.2 19.5 0.70 0.02 1.9 2.7 0.3 4.2 6.3 1/30 1756 S 0 - 8.1 24.3 0.20 0.16 B 0 - 8.1 24.2 0.40 0.13 2/7 0850 S 0 - 7.6 23.5 0.20 0.10 1.6 2.6 0.0 2.4 5.8 3/28 0945 S 0 - 7.9 23.0 0.10 0.07 - 6.4 5.5 4.7 0.5 4/11 1030 S 0 - 8.1 26.2 0.30 0.05 1.5 5.2 0.9 - 7.8 5/16 1330 S 0 - 26.7 0.20 0.08 2.7 - 4.7 4.3 5.2 5/22 1330 S 0 - 31.3 0.20 0.10 2.6 5.2 1.6 5.1 5/28 1340 S 0 - 30.7 0.10 0.00 2.3 4.4 0.0 6.1 4.7 6/6 1415 S 0 - 29.5 0.10 0.12 6/12 1330 S 0 - 29.6 0.20 0.10 0.7 2.2 0.1 4.1 8.6 5/10 1230 S 0 - 31.5 0.20 0.10 0.7 2.2 0.1 4.1 8.6 5/10 1230 S 0 - 28.1 25.88 B P - 28.0 25.95														2.0
12/10 1159 S 0 21.2 0.20 0.02 6.6 3.1 5.7 1957 1/8 1045 S 0 - 8.2 19.5 0.70 0.02 1.9 2.7 0.3 4.2 6.3 1/30 1756 S 0 - 8.1 24.3 0.20 0.16 B 0 - 8.1 24.2 0.40 0.13 2/7 0850 S 0 - 7.6 23.5 0.20 0.10 1.6 2.6 0.0 2.4 5.8 3/28 0945 S 0 - 7.9 23.0 0.10 0.07 - 6.4 5.5 4.7 0.5 4/11 1030 S 0 - 8.1 26.2 0.30 0.05 1.5 5.2 0.9 - 7.8 5/16 1330 S 0 - 26.7 0.20 0.08 2.7 - 4.7 4.3 5.2 5/22 1330 S 0 - 31.3 0.20 0.10 2.6 5.2 1.6 5.1 5/28 1340 S 0 - 30.3 0.20 0.10 0.02 2.3 4.4 0.0 6.1 4.7 6/6 1415 S 0 - 29.5 0.10 0.12 6/12 1330 S 0 - 29.5 0.10 0.12 6/12 1330 S 0 - 31.5 0.20 0.10 0.7 2.2 0.1 4.1 8.6 5/10 1230 S 0 - 31.5 0.20 0.10 0.7 2.2 0.1 4.1 8.6 5/10 1230 S 0 - 28.1 25.88 B P - 28.0 25.95														
1957 1/8														
1/8 1045 S 0 - 8.2 19.5 0.70 0.02 1.9 2.7 0.3 4.2 6.3 1/30 1756 S 0 - 8.1 24.3 0.20 0.16 B 0 - 8.1 24.2 0.40 0.13 2/7 0850 S 0 - 7.6 23.5 0.20 0.10 1.6 2.6 0.0 2.4 5.8 3/28 0945 S 0 - 7.9 23.0 0.10 0.07 - 6.4 5.5 4.7 0.5 4/11 1030 S 0 - 8.1 26.2 0.30 0.05 1.5 5.2 0.9 - 7.8 5/16 1330 S 0 - 8.1 26.2 0.30 0.05 1.5 5.2 0.9 - 7.8 5/12 1330 S 0 - 31.3 0.20 0.10 2.6 5.2 1.6 5.1 5/28 1340 S 0 - 30.7 0.10 0.00 2.3 4.4 0.0 6.1 4.7 6/6 1415 S 0 - 29.5 0.10 0.12 6/12 1330 S 0 - 29.6 0.20 0.01 0.9 3.0 0.3 4.5 10.2 6/20 1230 S 0 - 31.5 0.20 0.10 0.7 2.2 0.1 4.1 8.6 STATION B 57 Depth of 11 feet 26° 29.7' N 82° 08.8' W		1159	S	0	_	_	21.2	0.20	0.02	-	_	6.6	3.1	5. /
1/30	1/8	1045	S	0	-	8.2	19.5	0.70	0.02	1.9	2.7	0.3	4.2	6.3
B 0 - 8.1 24.2 0.40 0.13 2/7 0850 S 0 - 7.6 23.5 0.20 0.10 1.6 2.6 0.0 2.4 5.8 3/28 0945 S 0 - 7.9 23.0 0.10 0.07 - 6.4 5.5 4.7 0.5 4/11 1030 S 0 - 8.1 26.2 0.30 0.05 1.5 5.2 0.9 - 7.8 5/16 1330 S 0 - 26.7 0.20 0.08 2.7 - 4.7 4.3 5.2 5/22 1330 S 0 - 31.3 0.20 0.10 2.6 5.2 1.6 5.1 5/28 1340 S 0 - 30.7 0.10 0.00 2.3 4.4 0.0 6.1 4.7 6/6 1415 S 0 - 29.5 0.10 0.12 6/12 1330 S 0 - 29.6 0.20 0.01 0.9 3.0 0.3 4.5 10.2 6/20 1230 S 0 - 31.5 0.20 0.10 0.7 2.2 0.1 4.1 8.6 STATION B 57 Depth of 11 feet 26° 29.7' N 82° 08.8' W										** /	2	0, 3	1	0,5
2/7 0850 S 0 - 7.6 23.5 0.20 0.10 1.6 2.6 0.0 2.4 5.8 3/28 0945 S 0 - 7.9 23.0 0.10 0.07 - 6.4 5.5 4.7 0.5 4/11 1030 S 0 - 8.1 26.2 0.30 0.05 1.5 5.2 0.9 - 7.8 5/16 1330 S 0 - 26.7 0.20 0.08 2.7 - 4.7 4.3 5.2 5/22 1330 S 0 - 31.3 0.20 0.10 2.6 5.2 1.6 5.1 5/28 1340 S 0 - 30.7 0.10 0.00 2.3 4.4 0.0 6.1 4.7 6/6 1415 S 0 - 29.5 0.10 0.12 6/12 1330 S 0 - 29.6 0.20 0.01 0.9 3.0 0.3 4.5 10.2 6/20 1230 S 0 - 31.5 0.20 0.10 0.7 2.2 0.1 4.1 8.6 STATION B 57 Depth of 11 feet 26° 29.7' N 82° 08.8' W	1/30	1130												
3/28 0945 S 0 - 7.9 23.0 0.10 0.07 - 6.4 5.5 4.7 0.5 4/11 1030 S 0 - 8.1 26.2 0.30 0.05 1.5 5.2 0.9 - 7.8 5/16 1330 S 0 - 26.7 0.20 0.08 2.7 - 4.7 4.3 5.2 5/22 1330 S 0 - 31.3 0.20 0.10 2.6 5.2 1.6 5.1 5/28 1340 S 0 - 30.7 0.10 0.00 2.3 4.4 0.0 6.1 4.7 6/6 1415 S 0 - 29.5 0.10 0.12 6/12 1330 S 0 - 29.6 0.20 0.01 0.9 3.0 0.3 4.5 10.2 6/20 1230 S 0 - 31.5 0.20 0.10 0.7 2.2 0.1 4.1 8.6 STATION B 57 Depth of 11 feet 26° 29.7' N 82° 08.8' W	2/7	0050								1 (2 (0 0	2 4	<i>-</i> 0
4/11 1030 S 0 - 8.1 26.2 0.30 0.05 1.5 5.2 0.9 - 7.8 5/16 1330 S 0 - 26.7 0.20 0.08 2.7 - 4.7 4.3 5.2 5/22 1330 S 0 - 31.3 0.20 0.10 2.6 5.2 1.6 5.1 5/28 1340 S 0 - 30.7 0.10 0.00 2.3 4.4 0.0 6.1 4.7 6/6 1415 S 0 - 29.5 0.10 0.12 6/12 1330 S 0 - 29.6 0.20 0.01 0.9 3.0 0.3 4.5 10.2 6/20 1230 S 0 - 31.5 0.20 0.10 0.7 2.2 0.1 4.1 8.6 STATION B 57 Depth of 11 feet 26° 29.7' N 82° 08.8' W														
5/16 1330 S 0 26.7 0.20 0.08 2.7 - 4.7 4.3 5.2 5/22 1330 S 0 31.3 0.20 0.10 2.6 5.2 1.6 5.1 5/28 1340 S 0 30.7 0.10 0.00 2.3 4.4 0.0 6.1 4.7 6/6 1415 S 0 29.5 0.10 0.12 6/12 1330 S 0 29.6 0.20 0.01 0.9 3.0 0.3 4.5 10.2 6/20 1230 S 0 31.5 0.20 0.10 0.7 2.2 0.1 4.1 8.6 STATION B 57 Depth of 11 feet 26° 29.7' N 82° 08.8' W 1954 6/2 0955 S P - 28.1 25.88 B P - 28.0 25.95					-									
5/22 1330 S 0 31.3 0.20 0.10 2.6 5.2 1.6 5.1 5/28 1340 S 0 30.7 0.10 0.00 2.3 4.4 0.0 6.1 4.7 6/6 1415 S 0 29.5 0.10 0.12 6/12 1330 S 0 29.6 0.20 0.01 0.9 3.0 0.3 4.5 10.2 6/20 1230 S 0 31.5 0.20 0.10 0.7 2.2 0.1 4.1 8.6 STATION B 57 Depth of 11 feet 26° 29.7' N 82° 08.8' W 1954 6/2 0955 S P 28.1 25.88 B P - 28.0 25.95					_	8.1					5.2			
5/28 1340 S 0 30.7 0.10 0.00 2.3 4.4 0.0 6.1 4.7 6/6 1415 S 0 29.5 0.10 0.12 6/12 1330 S 0 29.6 0.20 0.01 0.9 3.0 0.3 4.5 10.2 6/20 1230 S 0 31.5 0.20 0.10 0.7 2.2 0.1 4.1 8.6 STATION B 57 Depth of 11 feet 26° 29.7' N 82° 08.8' W 1954 6/2 0955 S P 28.1 25.88 B P - 28.0 25.95	5/16	1330	S	0		-	26.7	0.20	0.08	2.7	-	4.7	4.3	5.2
6/6 1415 S 0 29.5 0.10 0.12 6/12 1330 S 0 29.6 0.20 0.01 0.9 3.0 0.3 4.5 10.2 6/20 1230 S 0 31.5 0.20 0.10 0.7 2.2 0.1 4.1 8.6 STATION B 57 Depth of 11 feet 26° 29.7' N 82° 08.8' W 1954 6/2 0955 S P 28.1 25.88 B P - 28.0 25.95	5/22	1330	S	0	-	-	31.3	0.20	0.10	2.6	5.2	1.6	5.1	
6/12 1330 S 0 29.6 0.20 0.01 0.9 3.0 0.3 4.5 10.2 6/20 1230 S 0 31.5 0.20 0.10 0.7 2.2 0.1 4.1 8.6 STATION B 57 Depth of 11 feet 26° 29.7' N 82° 08.8' W 1954 6/2 0955 S P 28.1 25.88 B P - 28.0 25.95	5/28	1340	S	0	_	-	30.7	0.10	0.00	2.3	4.4	0.0	6.1	4.7
6/12 1330 S 0 29.6 0.20 0.01 0.9 3.0 0.3 4.5 10.2 6/20 1230 S 0 31.5 0.20 0.10 0.7 2.2 0.1 4.1 8.6 STATION B 57 Depth of 11 feet 26° 29.7' N 82° 08.8' W 1954 6/2 0955 S P 28.1 25.88 B P - 28.0 25.95	6/6	1415	S	0	-	_	29.5	0.10	0.12					
6/20 1230 S 0 31.5 0.20 0.10 0.7 2.2 0.1 4.1 8.6 STATION B 57 Depth of 11 feet 26° 29.7' N 82° 08.8' W 1954 6/2 0955 S P 28.1 25.88 B P 28.0 25.95		1330	S	0	-	_	29.6	0.20	0.01	0.9	3.0	0.3	4.5	10.2
STATION B 57 Depth of 11 feet 26° 29.7' N 82° 08.8' W 1954 6/2 0955 S P - 28.1 25.88 B P - 28.0 25.95				0	_	-								
1954 6/2 0955 S P 28.1 25.88 B P 28.0 25.95	0,20													
6/2 0955 S P 28.1 25.88 B P 28.0 25.95		STATIO	ON I	3 57	Dep	oth of	11 feet	26° 2	29.7' N	1	82°	08.81	<u>V</u>	
B P - 28.0 25.95		0055	C	173			20 1	25 00						
	6/2	0955			_	-								
6/11 1342 S P = 31 4 23 15					-	-								
·	6/11	1342	S	P	-	-	31.4	23.15						
11/2 1435 S 0 21.5 30.39		1435	S	0	-		21.5							
11/24 1010 S 0 30.55	11/24	1010		0	-	-								
12/8 1104 S 0 16.2 33.31		1104	S	0			16.2	33.31						
1955	1955		_	_			1/ 5	24.20						
1/20 1050 S P 16.7 34.29														
2/10 1052 S 0 18.3 34.04						-								
3/28 1240 S 0 19.6 35.57	3/28	1240		0	-									
B 0 19.1 35.53				0	_	-								
4/5 1615 S 0 23,3 34,36	4/5	1615	S	0		-	23.3	34.36						
4/26 1106 S 0 27.2 36.45		1106	S	0	-	_	27.2	36.45						
В 0 - 27.0 36.45	·				_	_	27.0	36.45						
6/8 1052 S 0 28.6 37.36	6/8	1052			_	_								
6/27 1050 S 0 32.0 35.32					-									

\ <u> </u>										-	NIC		
Data	Time	S	C 1		n T T	0.0	Cc 1	C.,	Р	0	NO - 3	Com	Davis
Date	Time	or B	C.	M.	рН	°C	Sal.	Cu.	In.	Tot.	NO ₂	Car.	Pro.
7/10	1254					27.0	27.00		111.	101.			
7/18	1254	S	0	-	-	31.9	27.20						
= 100	104/	В	0	-	-	30.5	28.42						
7/20	1846	S	0	_	-	30.0	27.23						
8/2	1045	S	0	_	_	28.3	24.56						
8/16	1026	S	0	_	***	30.0	30.30						
	/	В	0	_	-	30.0	30.88						
8/24	1556	S	0	-	-	31.5	27.83						
		В	0	_	-	31.2	28.59						
9/12	1300	S	0	-	•	31.9	21.53						
9/27	1223	S	0	-	-	29.1	23.66						
11/1	1311	S	0	-	-	22.8	31.13						
12/1	0921	S	0	_	-	16.6	34.01						
12/7	0845	S	0	_	-	21.0	32.37						
		В	0	-	-	20.7	32.38						
12/19 1956	1700	S	0	-	-	17.9	34.65						
1/18	1306	S	0	-	-	16.0	35.44						
2/2	1330	S	0	-	-	20.9	34.93						
		В	0	-	-	20.9	34.76						
2/14	1325	S	0	_	-	20.5	34.97						
2/29	1316	S	0	_	-	17.9	36.30						
3/13	1248	S	0	-	-	25.0	36.24						
3/14	0814	S	0	_	-	25.0	36.63						
		В	0	-	-	25.0	36.35						
3/26	1435	S	0	_	-	19.5	36.57						
4/3	1240	S	0	-		23.0	37.87						
4/18	1500	S	0	-	-	23.0	36.93						
5/9	0842	S	0	-	-	27.7	37.00						
		В	0	-	-	27.6	37.39						
6/7	0843	S	0	-	-	28.7	38.29						
		В	0	-	~	28.3	38.41						
6/13	1443	S	0	-	-	27.9	38.20						
		В	0	_	-	27.9	38.05						
6/26	1540	S	0	-	-	31.5	38.66						
6/28	1300	S	0	-	-	31.1	38.55						
		В	0	-	-	30.8	38.61						
7/19	1056	S	0	-	-	31.1	39.04						
		В	0	-	-	31.3	38.90						
7/13	0745	S	0	_	-	29.5	37.83						
		В	0	-	-	29.2	37 .6 5						
7/30	1515	S	0	-	-	31.0	37.80						
8/6	1112	S	0		-	32.1	38.03						
8/13	1300	S	P	-	-	-	38.48						
8/27	1440	S	0	-	_	31.5	38.28						

		S							P	0	NO-		
Date	Time	or	G. F	oreve	рН	°C	Sal.	Cu.	_	4	3	Car.	Pro.
Date	1 11110	В	C.	M.	PII		Dan.		In.	Tot.	NO	001	2 1 0 0
9/6	1213	S	0	_	_	29.5	35.65	-					
		В	0	_	_	29.0	36.33						
9/4	1145	S	0	~	_	31.1	37.21						
9/13	0903	S	0	_	-	24.5	35.92						
9/24	1214	S	0	_	_	27.8	32.45						
10/2	1338	S	0	_	_	29.0	32.86						
10/8	1121	S	0	-	-	27.5	32.47						
10/17	1415	S	0	***	_	24.5	32.90						
10/25	1258	S	0	-	_	25.5	31.77						
10/30	0825	S	0		_	23.0	32.46						
10,00		В	0	_	_	23.0	32.46						
11/1	1223	S	0	_	_	24.5	33.15						
11/7	1243	S	0	_	_	23.5	33.68						
11/15	1250	S	0	_	-	20.5	33.49						
11/16	1506	S	0	_	_	21.6	33.08						
11/10	1500	В	0	_	_	21.5	33.41						
11/19	1244	S	0	_	_	24.0	34.12						
11/26	1025	S	0	_	_	18.0	34.34						
12/3	1215	S	0	_	_	18.0	35.30						
12/11	1 3 49	S	0	_		22.0	34.02						
12/11	1455	S	0		_	23.0	33.53						
12/13	1400	В	0			23.1	33.30						
12/21	0755	S	0	_	_	23.0	33.58						
1957	0755	3	U	_	-	25.0	33.30						
1/8	0801	S	0	-		19.0	35.23						
		В	0	-		19.0	35.41						
1/9	1441	S	0	-	-	21.0	35.36						
1/15	1122	S	0		_	21.2	35.72						
1/23	1423	S	0	-	-	19.6	35.22						
		В	0	-	-	19.3	35.40						
1/22	1258	S	0	-	-	18.5	35.80						
1/28	1353	S	0	000	-	_	3 4. 75						
	1100	S	0	-	•	24.5	34.36						
2/5	0857	S	0		~	24.0	35.70						
		В	0		_	24.1	35.80						
2/11	1116	S	0	-		24.5	35.78						
2/20	1311	S	0	_	~	22.0	35.81						
3/7	1510	S	0	_	-	22.5	32.83						
3/12	1204	S	0	-	-	19.5	32.05						
3/18	1438	S	0	_	-	23.5	32.17						
3/28	1254	S	P	_		22.0	33.15						
4/17	1124	S	0	_	_	22.0	34.33						
4/22	1441	S	0	_	-	26.5	32.58						
5/3	1014	S	0	mat	_	27.0	34.16						
5/7	1318	S	0	040	_	25.5	33.53						
3/1	1310												

	Date	Time	S		breve	рН	°C	Sal.	Cu.	F	PO 4	NO - 3	Car	Pro.
1	Jale	Time	В	C.	M.	þп	C	Dat.		1.	Tot.	NO ₂	Qai,	FTU.
- 5	5/14	1535	S	0	-	-	29.5	33.86						
	5/16	0943	S	0	-	~	29.0	33.24						
5	5/22	0900	S	P	_	-	30.5	31.57						
5	5/28	0714	S	0	-	•••	30.2	28.60						
	5/3	1127	S	0			29.3	27.04						
	5/11	1148	S	0	-	***	29.5	31.38						
	5/17	1105	S	0	-	-	28.7	27.56						
	5/20	0940	S	0	-	-	29.1	25.19						
6	6/25	1355	S	0	-	-	-	25.47						
10	54	STATIO	ON B	58	Dept	h of	10 feet	26° 29	. 2' N		82°	04.21 W		
	1/2	0840	S	P	-	-	25.2	27.62						
6	5/2	0935	S	P	-	-	28.0	26.64						
			В	0	-	-	27.7	30.57						
6	5/11	1405	S	P	-	-	31.3	21.20						
			В	0	-	-	30.7	26.38						
	5/29	1030	S	0	-	-	31.0	21.68						
12	2/8	1040	S	0	-	-	16.2	27.41						
19	55	1/20	В	0	**		16.4	29.61						
	1/5	1630	S	0	-	_	23.9	34.90						
4	1/26	1730	S B	0	-		27.4 27.5	36.38 36.42						
	5/11	0915	S	0	-	_	28.5	37.14						
	5/25	1600	S	0	_	_	31.0	35.92						
	5/10	1138	S	0	_	-	31.6	38.07						
	6/17	1135	S	0	_	-	28.1	34.43						
	5/27	1026	S	0	_	_	31.2	33.93						
			В	0		_	31.2	34.99						
7	7/2	1442	S	0	-	-	32.0	31.24						
7	7/18	1231	S	0	-	-	31.9	30.05						
			В	0	-	-	30.3	32.32						
	7/20	1905	S	0	-	-	29.9	27.68						
	8/2	1025	S	0	-	~	28.3	20.70						
8	8/16	0956	S	0		-	30.6	21.92						
	_ 4	4	В	0	-	_	30.8	26.44						
8	8/24	1536	S	0	_	-	31.9	26.71						
	0 / 2 0	1220	В	0		-	31.5	28.69						
	9/12	1239	S	0	-	-	30.7 29.3	24.36 29.18						
	9/27	1201	S B	0	-	-	29.0	27.36						
1	1/1	1252	S	0	-		22.8	29.92						
1.	1/1	1252	В	0	_	_	23.0	30.14						
1	1/21	1723	S	0	_	_	23.0	31.94						
	2/1	0900	S	0	_		16.6	32.81						

		S							PO		NO-		
Date	Time	or	G. b	reve	рН	°C	Sal.	Cu.	10	4	3	Car	Pro.
25440	2 22110	В	C.	M.	F		Dun.	In	. '	Tot.	NO	Car.	FIO.
12/19	1720	S	0	-		18.2	32.20						
1956		В	0	**	-	18.1	32.88						
1/18	1238	S	0	-	••	16.5	_						
2/2	1351	S	0		-	20.0	35.06						
272	1331	В	0	-	-	20.4	35.00						
3/14	0755	S	0	_	_	24.6	36.32						
-,		В	0	040	-	24.9	36.24						
5/9	0822	S	0	_	_	28.0	37.10						
•		В	0	0-0	_	27.7	37.65						
6/7	0823	S	0	-	-	28.8	37.68						
		В	0	-	-	28.5	37.71						
6/28	1318	S	0	***	-	30.5	37.17						
		В	0	**	-	30.4	38.23						
7/19	1116	S	0	•	-	31.1	38.12						
		В	0	-	***	31.1	38.44						
7/13	0725	S	0	**	-	29.0	37.44						
		В	0	-	•	29.0	37.22						
9/6	1152	S	0	~	040	28.5	34.65						
		В	0	-	-	28.5	34.76						
10/30	0806	S	0	**	-	23.1	28.20						
		В	0	444	-	23.0	29.22						
11/16	1525	S	0	-		22.0	31.42						
		В	0	-	-	21.8	32.04						
12/13	1520	S	0	-	-	22.5	33.31						
1957	0.77.4.0	В	0	on	-	22.5	33.22						
1/8	0742	S	0	-	-	19.1	34.42						
2/5	0024	В	0	0.0		19.0	34.54						
2/5	0834	S	0	***	-	24.1	35.60 35.70						
4/25	1253	B S	0	-	***	242 26.0							
5/16	0952	S	P	_	_	29.0	29.74 31.25						
5/22	0908	S	P	-	_	30.3	30.63						
5/28	0723	S	0	00		29.5	27.62						
6/20	0942	S	0	-	_	29.5	25.65						
6/27	1147	S	0	_	440	30.3	34.66						
., _ ,		В	0	***	-	30.1	35.04						
	STATIO			Den	th of	12 feet	26° 29	. 11 N		82° (01' W		
1954		714 1		Бер	01			1 1 1					
3/12	1500	S	P	010	**	20.3	27.29						
3/26	1055	S	P			24.2	25.69						
4/8	1217	S	0	-		28.2	20.14						
4/23	0815	S	0	gath	-	24.5	28.87						
5/10	1530	S	0	-	-	29.0	12.86						
6/2	0910	S	P	•	-	27.9	24.24						

ľ	Date	Time	S or	G, b	reve	рН	°C	Sal.	Cu.	PC) 4	NO-3	Car.	Pro.
			В	C.	М.					In.	Tot.	NO		
Г	6/2	0910	В	0	-	-	27.9	29.79						
	6/11	1515	S	0	-	-	31.7	14.76						
	6/16	0800	S	P	-	-	27.7	22.61						
	6/24	0825	S	0	-		28.6	25.34						
	9/18	1020	S	0	-	-	29.7	27.30						
	955 3/24	0831	S	0	_	7.8	23.5	32.88	0.34					
	3/21	0031	В	0	_	7.8	23.7	33.73	0.14					
	3/28	1147	S	0	_	8.0	20.3	33.89	0.33					
	3 / 20	1111	В	0	_	8.1	19.9	34.13	0.12					
	4/26	0958	S	0	_	7.8	26.9	36.44	0.07					
	5/19	1410	S	0	_	_	29.4	36.07	0.01					
	6/8	1057	S	0		_	29.1	36.88						
	6/27	1000	S	0	_	_	31.1	32.79						
	0,2.	1000	В	0	_	~	30.9	35.09						
	7/18	1205	S	0		8.1	31.0	31.87	0.06					
	1110	100	В	0	_	8.1	30.7	33.06	0.07					
	8/2	1002	S	0	_	-	28.9	28.12	0.22					
	0,2	1000	В	0	_	_	28.3	30.52	0.21					
	8/16	0922	S	0		-	30.6	28.35	0.06					
	2/7	0800	S	0	-	8.0	20.9	33.53	0.07	0 3	0.8		1.0	1.8
		0000	В	0		8.0	21.0	33.59	0.19	0.3	0.5	_	10.7	1.0
	956 3/14	0734	S	0	-	7.9	25.0	36.14	0.07					1.5
	3/14	0134	В	0	_	8.0	25.8	36.12	0.07	- 0.4	0.9	-	1.4	1.6
	5/9	0801	S	0	_	8.1	28.0	37.46	0.16	0.5	1.7	0.2	1.7	0.0
	3/7	0001	В	0	_	8.1	27.6	37.48	0.14	0.4	1.1	0.4	3.8	0.1
	6/7	0802	S	0	_	8.3	28.4	37.66	0.12	0.3	0.9	0.0	1. 1	0.2
	0/1	0002	В	0	_	8.3	28.0	37.66	0.06	_	1.0	0.1	1.4	0.1
	7/13	0702	S	0	_	7.9	29.0	37.30	0.10	0.7	1.1	0.5	2.4	0.2
	. / 13	0102	В	0	_	8.1	28.9	37.40	0.09	0.4	0.7	0.6	0.9	0.1
	9/6	1133	S	0	_	8.1	28.8	34.30	0.08	0.5	0.8	1.1	1.4	0.4
	,,,	1100	В	0	_	8.2	28.5	34.30	0.05		_	0.3	1.4	
1	0/30	0745	S		_		23.0							0.4
	, , ,		В	0		7.9		30.73				0.3	1.8	0.5
1	1/16	1543	S	0	_		22.0	32.56					1.4	0.6
			В	0	-	_	21.9	32.73				1.2	1.1	0.6
1	2/13	1540	S	0	_	_	22.5	33.50		_	1.1		1.2	0.4
	957		В	0	_	-	22.4	33.83	0.14	_	1.9	4.1	1.0	0.6
	1/8	0722	S	0	200	_	19.2	35.45	0.04	-	0.6			
	270	0122	В	0	-	-	19.2	35.43	0.01		1.0			
	1/30	1344	S	0		8.1	24.0	34.97	0.06	·	1.0			
	1150	IJII	M		_	8.1	24.0	35.06	0.21					
			В	0	_	8.1	24.0	35.12	0.22					
	2/5	1810	S	0	_	7.9		35.40	0.00	0.2	0.8	0.5	0.6	0.2
			-											

	DIAIIC		, , , (00116	41								
		S							P	3 4	NO -		
Date	Time	or		reve	рН	°C	Sal.	Cu.	-		NO	Car.	Pro
		В	C.	M.					In.	Tot.			
3/28	1121	S	0		-	22.0	30.36	0.00	0.3	1.6	0.8	1.8	0.7
4/12	1422	S	0	011	~	27.0	32.62	0.10	0.4	1.2	1.3	0.8	0.8
4/25	1258	S	P	-		26.2	32.62	0.11					
5/10	1113	S	0	_	_	28.8	31.18	***	0.6	1.2	1.2	0.5	0.5
0,20		В	0	State .	_	29.3	20.56	0.08	_	1.0			
5/22	1030	S	0	-	_	30.6	31.39	0.00	0.3	0.8	1.8	1.1	0.3
9,00	2000	В	0		_	30.6	31.57	0.04	_	2.6			
5/23	1025	S	0		_	30.4	31.15	0.02	0.7	1.7	1.2	1.2	1.3
3/20	1023	В	0			30.8	31.84	0.01	-	2.6	1. 5	100	1.5
615	1400	S	0	_	_	30.7	18. 25	0.57	1.3	2.7	0.2	2.3	2.4
6/6	1400			•			21. 20	0.07	-		0.2	۷, ۵	2. T
/ / 12 2	1005	В	0	•••	-	30.5				2.7	Λ 2	2 4	1 7
6/12	1235	S	0	-	-	29.4	30.87	0.04	0.6	2.7	0.2	2.6	1.7
		В	0	040	000	29.4	31.18	0.00	•	8.2	0 0	0 0	4 0
6/20	1225	S	0	-	-	30.5	14.78	0.29	0.8	2.2	0.2	2.0	4.8
		В	0	~	-	29.9	27.04	0.07	-	0.9			
1055	STATIO	ON E	3 60	Dep	th of	12 feet	26°	28.31 N	J	82°	00.217	N	
1955 1/2	1455	S	0	_	-	21.9	32.27						
8/16	0912	S	0	•	***	30.6	26.08						
0/10	0 / 1 2	В	0	ded	***	30.0	30.03						
8/24	1514	S	0	•••	•	30.1	28.59						
	1311	В	0	_	949	31.3	30.26						
1956				_	_								
2/14	1407	S	0	-	-	22.0	34.64						
2/29	1545	S	0	_	010	20.3	34.89						
3/14	1310	S	0	-	-	25.5	36.29						
3/26	1520	S	0	-	-	19.4	37.01						
4/3	1330	S	0	-	-	23.0	36.95						
4/15	1535	S	0	-	-	23.9	36.76						
6/13	1519	S	0	-	-	28.4	37.92						
		В	0	-	-	28.4	37.96						
6/26	1600	S	0	_		31.5	37.96						
6/28	1354	S	0	-		29.9	37.73						
		В	0	_	-	29.8	37.71						
7/30	1547	S	0	0-0	_	30.0	37.92						
8/6	1236	S	0	_	_	31.3	37.86						
8/13	1427	S	0	_	_	34.0	38.12						
8/27	1514	S	0	_	_	31.1	36.82						
9/4	1245	S	0	_	_	30.2	37.64						
9/4	0940	S	0		_	26.2	J1.01						
9/13	1317	S	0	960		28.0	34.14						
		S		_	-	29.0	34.42						
10/2	1352		0	_	040								
10/8	1228	S	0	qualit	_	28.6	26.00						
10/17	1445	S	0		-	24.2	32.43						
11/1	1350	S	0	-	~	24.6	31.51						

	-	CD: 1	S	-						P		NO-		
	Date	Time	or		reve	рН	°C	Sal.	Cu.		4	3 NO	Car.	Pro.
			В	C.	M.					In.	Tot.	NO ₂		
	11/7	1343	S	0	~	-	24.0	30.41						
	11/15	1347	S	0		-	21.2	33.37						
	11/19	1324	S	0	-		22.2	32.08						
	11/27	0928	S	0	-	-	17.0	31.95						
	12/3	1304	S	0	-		17.8	33.45						
	12/11	1415	S	P	-	010	22.5	32.84						
	12/21	0957	S	0	040	***	22.5	33.63						
	1957 1/15	1225	S	0			21.0	25 01						
	1/23	1345	S	0	_	-	21.0	35.81						
	1/23	1343	В	0	-	-		34.73						
	1/22	1330	S	0	_	_	19.5	35.54						
	1/28	1433	S	0	-	_	19.5	34.90						
	2/5	1143	S	0	_	_	23.5	34.50						
	2/11	1250	S	0	_	_	24.5	36. 24						
	2/20	1319	S	0	-	_	25.0	35.47						
	2/26	1202	S	0	040		22.2	36.05						
	3/7	1544	S	0	-		22.0	35.82						
	3/12	1310	S	0	-	-	21.5	33.58						
	3/18	1448	S	0	-	-	20.0	31.81						
	3/27	1350	S	P	-	-	23.0	34.09						
	4/17	1152	S	0	-	-	23.5	33.27						
	4/22	1312	S	0	444		24.0 26.5	33.83						
	5/3	1020	S	0	_	-	27.0	33.90						
	5/7	1345	S	0	-	•	26.5	34.63						
	5/14	1455	S	0	_	_	29.5	33.08						
	5/16	0959	S	0	-	_	29.0	34.71 32.01						
	5/22	0830	S	P		_	30.5	32.93						
	5/21	1115	S	0		_	31.0	31.24						
	5/28	0730	S	0	040	_	29.8	29.90						
	5/29	1335	S	0	040	_	31.0	32.55						
	5,27	1000	В	0	_	_	30.8	33.83						
	6/3	1138	S	0	-	_	29.2	27.45						
	6/11	1255	S	0	_		30.2	31.86						
	6/17	1232	S	0	_		29.5	29.25						
	6/20	0945	S	0	-	***	29.2	30.13						
									01		000	0.01		
1	1955	STATIC	N B	61	Dept	n of	9 feet	26° 27	. 9. N		82 0	0.91 W	_	
	1/2	1445	S	P	_	040	22.8	29.83						
	~ / ~	1117	В	0	_	Out	21.2	32.72						
	8/24	1519	S	0	-	Cast .	31.4	30.95						
	0,51	171/	В	0	_	_	31.6	30.90						
	9/12	1219	S	0	_	garin.	30.0	25.93						
	// 10	101/	В	0	_	_	29.8	27.63						
							27.0	,						

	DIAIN		, 01	(Joint d	1								
		S							F	0	NO-		
Date	Time	or		breve	pH	°C	Sal.	Cu.		4	NO,	Car.	Pro.
		В	C.	М.					In.	Tot.	1102		
9/27	1142	S	0	_	-	28.9	32.07						
11/1	1236	S	0	_	***	23.0	31.53						
		В	0	_	_	23.1	31.51						
11/21	1739	S	0	_	-	23.0	33.23						
12/1	0842	S	0	-	-	16.3	30.55						
12/19	1744	S	0	_	-	18.5	33.78						
1956													
1/18	1215	S	0		-	16.7	34.22						
		В	0	-	-	16.7							
2/2	1407	S	0	-	-	20.0	35.23						
		В	0	-	-	19.9	35.18						
6/28	1349	S	0	-	-	29.7	38.05						
		В	0	-	-	29.7	37.96						
1954	STATIO	ON B	62	Dept	h of	19 feet	26° 2′	7.41 N	1	82°	01.5' W		
3/12	1420	S	P			19.5	31.89						
-,		В	P	_	_	19.5	32.43						
6/11	1500	S	P	-		31.5	23.57						
6/29	1010	S	0	_	_	31.0	22.47						
1955	1010					31,0							
1/20	1007	S	P	_	-	17.2	31.02						
1956		В	P	-	-	17.5	32.92						
6/28	1344	S	0	_	_	30.0	38.05						
		В	0	_	-	29.9	38.04						
7/19	1131	S	0	_	-	30.9	38.03						
. , - ,		В	0	_	_	30.9	38.07						
	STATIO			Dep	th of	8 feet	26° 2	7.9' N	J	81°	58.1' W		
1954				<u>I</u>					_			-	
2/9	1110	S	0	_		17.0	21.65						
2/16	1345	S	P	-		21.0	30.36						
3/12	1535	S	P	-		23.7	31.53						
3/13	1430	S	P		-	23.8	31.83						
3/18	1320	S	P	***	_	20.5	28.64						
3/26	1030	S	P	-	-	23.8	29.43						
4/2	1400	S	P	_	_	28.3	29.92						
4/23	0925	S	P	_		24.4	30.23						
5/10	1600	S	P	_		29.0	29.38						
5/31	1110	S	P	-		29.2	32.10						
6/24	0800	S	0	-		28.8	26.96						
7/9	0740	S	0	_	_	28.4	28.37						
7/12	0715	S	0	_	-	29.3	27.14						
7/31	0920	S	0	_	-	29.6	24.54						
9/9	1115	S	0	-	_	30.4	31.55						
9/27	1040	S	0			29.3	28.15						
10/28	0730	S	-	250	_	22.9	29.81						
20,20						,	,						

		S							P	0	NO-		
Date	Time	or	G.	breve	рН	°C	Sal.	Cu.	_	4		Car	Pro.
		В	C.	M.	1				In.	Tot.	NO_2	Oar.	110.
10/29	1012	S	_	55	0-0	24.1	29.76						
10/29	1408	S	_	45	84	25.0	29.81						
11/1	1335	S	_	12	_	22.8	26.36						
1955						_ •							
1/2	1515	S	0	***	-	21.6	32.59						
1/27	0747	S	0	-		15.5	31.67						
2/8	1140	S	0	***	-	20.5	33.13						
2/23	0950	S	0	-	-	19.9	33.15						
5/19	1430	S	0	-	•	30.3							
6/10	1010	S	0	-	•	30.0	37.36						
6/17	0930	S	0	-	040	26.8	35.42						
7/7	1520	S	0	-	-	30.1	34.19						
7/14	1135	S	0	-	-	31.1	32.38						
7/27	1545	S	0	-	-	30.6	29.00						
8/2	1600	S	0	_	0.0	30.1	28.64						
8/12	1030	S	0	-	04	31.1	26.87						
8/15	1734	S	0	••	••	-	26.18						
8/24	1357	S	0	-	-	32.0	31.46						
		В	0	-	-	32.0	31.38						
9/9	0900	S	0		-	26.4	24.27						
9/15	1620	S	0	-	-	31.0	23.33						
9/22	1200	S	0	-	-	33.0	25.79						
10/3	1445	S	0	846	-	29.2	30.07						
10/19	1440	S	0	***	-	24.5	29.94						
10/20	1652	S	0	-	_	22.9	29.20						
		В	0	-	•	23.5	29.90						
10/26	1120	S	0	_	**	25.6	32.84						
11/8	1020	S	0	_	-	22.8	32.18						
11/28	1430	S	0		••	25.0	33.78						
12/13	1300	S	0	-	**	19.0	32.74						
12/19	1757	S	0	-	-	18.5	32.72						
1956	1345	S	0			17.5	34.38						
1/4 1/11	1345 1247	S	0	_		13.2	34.20						
1/11	1600	S	0	••	-	16.1	34.72						
3/26	1416	S	0	_		20.1	37.45						
4/16	1558	S	0	-		24.8	37.71						
5/22	1545	S	0	_	_	29.5	38.37						
	1618	S	0	_		28.8	37.76						
6/13	1010	B	0	_		28.2	37.76						
7/2	1515	S	0	-	_	31.4	39.02						
10/22	1241	S	0	_	_	27.6	31.36						
10/22	1700	S	0	_		24.6	31.97						
10/29	1700	B	0	_	_	24.5	32.21						
12/10	1634	S	0	_	_	21.8	34.07						
12/10	1001	В	Ö	-		22.0	34.28						

	011111		05 (00111	-,								
		S							F	04	NO ₃ -		
Date	Time	or	G. 1	oreve	pН	°C	Sal.	Cu.		4	NO	Car.	Pro
		В	C.	M.					In.	Tot.	NO_{2}		
1957													
1/7	1800	S	0	_	**	20.7	35.12						
		В	0	-	_	19.7	35.12						
1/24	1101	S	0	_	-	20.1	35.14						
3/2	1523	S	0	_	_	20.2	31.06						
		В	0	-	-	20.1	31.16						
4/24	1207	S	0	_	_	26.7							
5/8	1630	S	0	_	-	25.0	34.83						
5/16	1007	S	0	₩	040	29.5	33.23						
5/22	0840	S	0	_		30.5	32.83						
5/28	0736	S	0	_	_	-	36.12						
3,20	0.00	В	0		_	30.0	36.36						
5/28	0844	S	0	_	_	30.1	33.17						
3/20	0011	В	0			30.2	33.48						
5/29	1352	S	0	_	_	31.2	32.97						
		S	0	_	-	29.5							
6/20	0947			_	-		31.54						
6/26	1303	S	0	_		30.9	32.86						
		В	0	-	-	30.6	32.94						
	STATIO	ON B	64	Dept	th of	6 feet	26° 2	7.51	N	81°	57.21 W	_	
1954							22.5/					_	
3/1	1440	S	P	-	-	19.0	22.56						
3/12	1520	S	P	-	-	20.8	27.34						
5/10	1625	S	0	_	-	29.0	26.31						
6/9	0730	S	0	-	-	29.0	24.27						
6/16	0730	S	0	-	-	28.2	28.06						
6/21	0750	S	0	-	-	28.2	21.18						
11/10	0910	S	P	_	-	19.2	28.71						
12/17	0748	S	0	_	_	16.6	30.55						
1955													
1/4	0820	S	0	_	-	20.2	32.29						
1/31	0955	S	0	_	-	13.8	31.76						
2/4	1400	S	0	-	-	18.3	32.07						
2/10	0905	S	0	-	-	18.7	33.26						
2/11	0715	S	0	-	_	19.8	33.58						
6/10	0918	S	0	-	-	28.8	37.23						
6/17	0903	S	0	-	-	27.0	35.07						
7/7	1450	S	0	-	•	29.9	33.17						
7/14	1116	S	0	-	_	30.2	30.72						
8/2	1548	S	0	_	-	30.0	27.72						
8/12	1015	S	0	-	_	31.1	25.79						
8/25	1425	S	0	-	_	30.6	30.08						
9/2	1337	S	0	_	_	31.8	32.21						
9/9	0840	S	0	-	₩	26.2	22.47						
9/15	1605	S	0	_	_	31.0	22.14						
9/22	1145	S	0	_		29.8	21.53						
// 22	4440		0			_ / • ∪							

		DIMIN) I I	, o	JOIN (- <i>j</i>								
-			S							F	0	NO-		
	Date	Time	or	G. b	reve	рН	°C	Sal.	Cu.		4	NO_2^3	Car.	Pro.
			В	C.	M.	_				In.	Tot.	2		
_	10/3	1420	S	0		_	29.5	29.18						
	10/19	1500	S	0	-	_	24.0	30.14						
	10/26	1055	S	0	_	_	24.5	32.47						
	11/8	1000	S	0	_	-	21.4	31.60						
	11/28	1445	S	0		-	24.0	33.68						
	12/12	1531	S	0	_	-	17.9	32.77						
	1956						_ , ,							
	1/4	1330	S	U	-	-	17.5	34.46						
	1/11	1231	S	0	_	0-0	13.2	34.02						
	1/23	1535	S	0	-	-	15.7	34.72						
	2/6	1535	S	0	-	-	24.0	35.30						
	3/26	1355	S	0	_	•	19.3	36.27						
	4/16	1546	S	0		-	24.9	38.02						
	9/25	1605	S	0	-	-	27.7	33.28						
	10/22	1255	S	0	_		27.4	31.60						
	1957													
	2/5	0805	S	0	-	-	24.7	35.97						
	4/24	1255	S	0	-	-	26.0							
	5/8	1635	S	0	_	-	24.9	32.13						
	6/4	0745	S	0	***	-	27.8	26.90						
		STATIO	ON I	3 65	Der	th of	32 feet	26° 2	8.211	V	82°	16.21 W	T	
	1954									_			_	
	2/16	1115	S	P	-	-	19.6	34.13						
			В	P	-	-	-	34.87						
	3/18	1000	S	0	_	-	17.5	34.27						
			В	P	-	-	17.4	34.27						
	4/8	1000	S	P	_	-	25.2	34.33						
			В	0	-	_	25.0	34.25						
	6/2	1400	S	P	_	_	27.4	34.99						
	1955		-	-			17 1	25 (2						
	1/27	1138	S	P	-	-	17.1	35.61						
	0/00		В	0	-	-	17.0	35.62						
	3/30	1138	S	0	-	-	20.6	36.27						
	/ /	- /	В		_	-	20.6	36.27						
	6/29	1655	S	0	-	-	31.5	36.73						
			В	0	-	-	31.2	36.71						
	8/4	1338	S	0		-	30.0	36.31						
			В	0	040	***	30.0	36.31						
	9/14	1448	S	0	-	-	29.9	33.53						
			В	0	-	-	30.2	35.05						
	9/29	1413	S	0	-	-	29.9	35.08						
			В	0	-	-	30.0	35.21						
	11/3	1327	S	0	-	-	24.8	35.62						
	1956		В	0	~	-	23.5	35.50						
	1/31	1056	S	0	ė~	_	17.4	35.88						
			B	Λ	_	-	16.9	35,90						

	STATIO	ON E	3 66	Dep	th of	30 feet	26°2	81 N		82°	14' W		
		S							P	0.	NO-		
Date	Time	or	G.	breve	рΗ	°C	Sal.	Cu.		4	3	Car.	Pro
_		B	C.	M.					In.	Tot.	NO	oar.	110
1954											- 4		
6/10	1315	S	0	-	_	30.9	33.12						
		B	0	-	-	28.9	35.32						
8/12	1105	S	P	-	-	31.4	33.80						
		В	0	-	-	30.8	35.17						
8/23	1520	S	P	_	_	30.5	33.86						
9/24	1310	S	0	_	_	28.5	34.04						
		В	0	-	_	28.6	34.23						
11/2	1645	S	_	400	-	22.9	34.29						
		В	-	300	-	22.6	34.52						
11/4	1809	S	_	210	-	21.4	34.34						
		В	_	290	-	21.4	34.49						
11/24	1350	S	_	330	_	_	34.11						
		В	0	***	-	-	34.74						
12/8	1652	S	-	325	_	18.3	34.02						
		В	-	125	_	18.3	34.52						
12/16	0942	S	-	200	_	17.3	34.87						
		В	_	125	_	17.4	34.81						
12/22	1149	S	-	550	_	16.4	34.88						
,	/	В	_	250	_	16.4	34.92						
12/28	1312	S	-	400	_	18.0	34.78						
	1010	В	_	300	_	17.4	34.87						
1955 2/15	1017	S	0										
2/15	1017			-	-	15.2	35.28						
6/27	1427	В	0	-	-	15.3	35.23						
6/28	1427	S	0	-		31.1	0/ /-						
0/20	1004	S	0	-	-	30.3	36.62						
7/22	004/	В	0	-	-	30.2	36.58						
7/22	0846	S	0	-	-	28.3	36.44						
0/17	142/	В	0		•	29.4	36.67						
8/17	1436	S	0	-	-	31.1	36.33						
0.120	10.25	В	0	-	-	30.6	36.33						
8/30	1037	S	0	-	-	30.4	34.78						
12/1	150/	В	0	-	_	30.2	36.18						
12/1	1526	S	P	-	-	20.2	35.85						
1956		В	P	-	~	20.5	35.84						
3/15	1805	S	0	-	₩	24.3	36.34						
		В	0	-	-	24.1	36.34						
7/17	1548	S	0	-	-	31.0	37.66						
		B	0	-	-	30.6	37.53						
9/13	1642	S	0	-	-	27.6	36.61						
		В	0	-	~	27.8	37.06						
12/11	0906	S	P	-	prop .	19.0	35.98						
1957		В	0	••	-	19.5	36.10						
1/10	1511	S	-	0.2	-	21.0							
1/24	0021	В	P	-	-	19.5	25.05						
1/24	0931	S B	0	-	•	18.5	35.97						
		B	P	-	***	18.3	35.88						

		STATIO	ON E	3 67	Dep	th of	58 feet	26° 2	5.4' N			25.71 V	V	
-			S						~	P	O_4	NO-3		
	Date	Time	or	G.	breve	pН	°C	Sal.	Cu.		4		Car.	Pro.
			В	C.	M.					In.	Tot.	NO		
	955						/	0/ -0						
	2/10	1439	S	P	-	-	18.6	36.18						
			В	0	-	-	18.0	36.24						
	3/30	1444	S	0	-	-	20.8	36.44						
			В	0	_	-	20.9	36.44						
	7/22	1003	S	0	-	-	29.4	36.80						
10	956		В	0	049	-	30.0	36.74						
-	5/15	0930	S	0	-		26.5	37.06						
			В	0	-	-	26.4	35.93						
		STATIO	ON E	3 68	Dep	th of	36 feet	26° 2	2.51 N		82°	201 W		
19	954									_				
	3/3	1035	S	P	-		19.4	34.83						
			В	P	-	-	19.0	34.76						
	3/18	1030	S	P	-	-	17.5	34.69						
1	1/26	1150	S	_	20	-	-	35.97						
			В	0	-	-	_	35.53						
1	2/16	1504	S	~	3	-	18.2	35.71						
11	955		Б	~	5	-	19.0	35.64						
	1/27	1049	S	0	_	_	17.5	35.77						
	-,	- ,	В	0	_	-	17.5	35.71						
	8/31	1353	S	0	_	-	30.6	36.45						
			В	0	_	_	30.6	36.64						
		STATIO	ON F	3 69	Dep	th of	23 feet		3.91 N	[82°	04.21	N	
	954				<u></u>								_	
	8/12	1201	S	P	_	**	31.8	33.64						
	1/2	1726	S		30	-	22.4	33.21						
1	2/8	1742	S	0	-	-	18.9	33.46						
			В	0	-	840	17.7	34.33						
	2/16	0855	S	-	25	-	17.2	34.45						
1	955 1/4	1019	S	₩	175	_	19.2	34.04						
	1/7	1017	B	_	70	_	19.1	34.14						
	1/27	1240	S	0	10	_	16.6	34.97						
		1270	B	0	_	_	16.6	35.07						
1	956 3/15	1855	S	P		-	24.9	36.38						
		1033	B	0	_		24.8	36.26						
1	957	1127	S	0	-		30.5	35.35						
	5/29	1137	S B	P	_	-	29.9	35.70						
		CITI A ITS				- L			2 ELN	Т	920	041 W		
1	955	STATI	ON I	5 70	Dep	otn of	24 feet	20 2	2.5' N		02	O-T VV		
	3/30	1010	S	0	_	8.1	19.8	35.73	0.34					
			В	0	-	8.1		35.62	0.12					
	6/1	1430	S	0	_	7.8		36.97	0.14					
			В	0	_	7.9	29.3	-	0.22					
	6/28	0827	S B	0	-	7.9 7.9	29.7 29.8	36.49	0.49					
			В	0	_	7.9	29.8	36.53	0.14					

	SIAIN		2 10 (COIII	ч/								
		S						C	P	4	NO-	G	_
Date	Time	or	G. b:		pН	°C	Sal.	Cu.	T		NO ₂	Car.	Pro.
		В	C.	M.					In.	Tot.			
7/22	0800	S	0	-	8.4	29.5	36.31	0.22					
		В	0	-	8.5	29.5	36.27	0.04					
8/4	1500	S	0	-	-	30.0	35.05	0.45					
		В	0	-	-	29.4	35.23	0.12					
8/30	0948	S	0	-	8.0	30.2		0.14					
10/20	1603	S	0	-	-	24.8	34.92	0.08					
		В	0	-	-	24.5	34.76	0.01				0 5	
12/20	1013	S	0	-	8.1	18.1	35.40	0.10	-	0.0	-	2.5	
1956		В	0	-	8.2	18.5	35.35	0.21	0.3	0.4	-	-	1.4
1/31	0930	S	0	-	-	17.3	35.71	0.13	-		-	1.1	
		В	0	_	-	17.2	35.72	0.08	0.6	1.0	-	1.0	1.3
3/13	1737	S	0	-	8.0	23.8	36.24	0.09	0.2	1.0	-	0.0	0.8
		В	0	-	8.0	23.3	36.19	0.04	0.2	2.1	-	0.0	1.0
5/15	1212	S	0	-	8.0	27.6	37.18	0.10	0.1	0.7	0.6	1.1	
		В	0	-	8.1	27.5	36.99	0.12	0.1	0.4	0.3	0.8	0.3
6/6	1500	S	0	_	8.4	28.9	37.35	0.05	0.1	0.2	0.0	0.5	0.0
		В	0	_	8.4	28.7	37.35	0.01	0.1	0.4	-	-	0.0
7/12	1409	S	0	-	8.2	30.9	37.47	0.00	0.4	0.5	0.3	0.8	0.0
		В	0	_	8.2	29.4	37.37	0.04	0.1	_	0.4	1.3	0.3
9/13	1727	S	0	-	8.1	26.6	36.61	0.04	0.3	0.5	0.0	1.4	0.3
		В	0	_	8.2	27.0	37.09	0.03	-	0.2	0.1	1.2	0.1
10/29	1611	S	0	_	8.2	25.0	35.67	0.02	-	0.4	4.4	0.6	0.1
/-/		В	0		8.2	24.5	35.90	0.07	-	0.5	0.5	0.7	0.1
11/19	1046	S	0	_	8.2	21.8	36.39	0.05		0.6	1.4	1.0	2.1
,-,		В	0	_	8.3	21.8	36.26	0.05	_	0.6	0.0	0.8	0.2
12/10	1501	S	0	_	_	20.2	35.95	0.02	0.5	0.9	2.4	1.4	0.7
		В	P	-	_	19.7	36.08	0.05	0.5	0.7	0.9	0.6	0.2
1957 1/7	1635	S	_	_		19.9	36.06	_	-	0.2			
1/1	1000	В	0	_	_	19.3	35.93	0.02	→	0.6			
2/7	1108	S	0	-	8.1	22.0	36.09	-	0.8	0.9	0.7	1.0	0.3
۵/۱	2200	В	0	_	8.1	22.4	36.04	0.81	0.6	0.8	0.6	1.3	0.6
	STATIO										12.5' V		
1955				Del		38 feet					10.5 1	_	
1955 3/30	1054	S	0	-	8.1	20.9	36.17	0.17					
		В	0	-	8.1	20.9	36.15	0.12					
7/22	1146	S	0	-	7.8	30.0	36.62	0.07					
		В	0	-	7.8	30.0	36.71	0.14					
8/4	1418	S	0		-	30.0	36.26	0.34					
		В	0	-	-	30.0	36.24	0.16					
8/15	1320	S	0		-	30.6	36.60	0.17					
		В	0	_	-	30.0	36.55	0.18					
8/31	1432	S	P	-	8.0	30.3	36.80	0.59					
9/14	1530	S	0	-	-	-	34.72	0.00	-	2.6			
		В	0	-		-	35.08	0.09	~	4.9			

		S							P	0,4	NO ₃ -		
Date	Time	or	G. b	reve	рН	°C	Sal.	Cu.	Τ,	4		Com	Pro.
Date	Time	В	C.	M.	PII	0	var.	Ou.	In.	Tot.	NO_2	Car.	Pro.
9/20	1236	S	0	- 141.		29.5	34.90	0.06	111.0	0.6	1.3	2.7	0.7
7/20	1230	В	0	_	_	29.7	35.34	0.12	0.6	0.7			
9/29	1500	S	0		8.0	29.9	36.31				2.6	3.5	2.4
7/49	1500			-				0.21	-	_	₩	3.2	0.3
11/2	1.42/	В	0	0-0	8.0	29.9	32.29	0.07	_	-	_	-	4.8
11/3	1426	S	0	₩	8.1	25.0	35.81	0.14					
12/20	1100	В	0	-	8.1	24.0	35.73	0.27	~ ~	~	_	11.4	7.2
12/20	1109	S	P	-	8.1	19.1	36.14	0.13	0.2	0.3	-	2.3	
1956		В	0	_	8.2	19.0	36.05	0.17	0.1	0.3	-	0.6	
1/31	1011	S	0	-		17.1	35.91	0.06	0.5	2.0	-	0.0	3.2
		В	0	-		17.1	35.92	0.04	-	0.5			
3/13	1703	S	0	***	7.9	23.1	35.95	0.06	0.0	0.6	-	0.0	0.9
		B	0	-	8.0	22.7	35.90	0.07	0.1	0.9	-	0.7	0.9
5/15	1126	S	0	_	8.1	27.3	37.02	0.00	_	0.3	0.0	1.0	0.0
		В	0	***	8.1	27.5	37.33	0.44	0.1	0.1	0.1	1.6	0.0
6/6	1405	S	0	-	8.3	29.0	37.61	0.05	0.1	0.2	0.0	12.7	0.1
		В	0	_	8.3	28.7	37.42	0.19	0.2	0.5	0.1	0.8	0.0
7/12	1326	S	0	-	8.3	32.0	37.38	0.03	0.1	0.2	0.5	0.7	
		В	0	_	8.3	29.5	37.27	0.11	0.5	1.0	0.3	1.2	0.1
9/14	0826	S	0	_	8.3	27.3	37.23	0.02	0.3	0.3	0.7	0.9	0.1
		В	0	-	8.3	27.1	37.21	0.01	0.3	0.5	1.0	0.5	0.2
10/29	1515	S	0	-	8.2	25.1	36.44	0.16	0.2	0.2	0.0	1.3	0.2
		В	0	_	8.2	25.0	36.45	0.10	0.0	0.1	0.0	3.9	0.3
11/19	1130	S	0		8.1	23.0	37.02	0.00	_	0.1	0.7	1.1	0.4
,-,		В	0	-	8.1	23.0	36.93	0.05	_	0.5	1.2	1.0	~ ~ ~
12/10	1413	S	P	_		20.4	36.35	0.14	0.0	0.5	1.4	1.1	0.5
,		M	P	_	₩	20.5	36.37	0.09	0.3	0.6	8.6	1.1	0.4
1055		В	P		_	20.2	36.40	0.01	_	0.1	2.1	0.8	0.2
1957 1/7	1557	S	P			20.3	36.26	0.03		0.3	∠ • 1	0.0	0.2
1/1	1331	M	P	gio ma	_	19.5	36.13	0.33	_	0.3			
		В	0	_	_	19.8	35.70	0.05	_	0.1			
2/7	1147	S	0	_	8.1	21.7	36.23	0.37	_	0.8	0.2	0.3	0.8
2/1	1171	M	P	-	8.1	22.0	36.15	0.34		0.7	0.2	0.8	0.1
		B		-		22.0							0.5
													0.5
1955	STATIC	ON B	72	Dep	th of	34 feet	26° 1	9.5' N	,	82°	07.81 V	V	
12/20	1044	S	0	-	8.1	19.0	35.35	0.29	_	1.0	_	2.1	
		В	0	_	8.2	18.5	35.70	0.17		0.2	_	1. 1	
1956	1140												0 0
5/15	1148	S	0	-	8.1	27.6	37.06	0.00	0.0	1.5	0.4	0.8	0.0
(1)	1.40=	В	0	-	8.1	27.6	37.25	0.00	0.1	0.5	0.0	1.1	0.0
6/6	1435	S	0	-	8.2	28.8	37.46	0.00	0.1	0.3	0.7	0.7	0.0
n / a a		В	0	-	8.2	28.5	37.36	0.01	0.2	2.4	0.0	1.2	0.2
7/12	1348	S	0	-	8.3	31.5	37.71	0.08	~	0.0	1.1	1.2	0.0
0/14	000/	В	0	-	8.3	29.5	37.27	0.06	0 2	0.2	0.2	1.5	0.1
9/14	0806	S	0	-	8.3	27.1	37.24	0.05	0.3	0.5	0.4	0.8	0.1
		В	0	_	8.3	27.0	37.24	0.04	0.3	0.5	0.2	0.7	0.1

		S							P	0	NO		
5	T:		_	h w 2 2	n LI	°C	Sal.	Cu.		4	3	Car.	Pro.
Date	Time	or		breve	pН		Jal.	04.	In.	Tot.	NO ₂	Oar.	110,
		В	C.	M.	0 0	25.2	2 45	0.21				0 0	0.0
10/29	1544	S	0	-	8.3	25.3	30.45	0.21		0.4	0.6	0.9	0.0
		В	0	-	8.3	24.7	36.37	0.08	-	0.6	1.0	1.1	0.0
11/19	1109	S	0	-	8.1	22.5	36.79	0.05	-	0.4	0.4	0.9	0.3
		В	0		8.2	22.2	36.64	0.15	-	0.5	1.2	0.5	0.3
12/10	1440	S	0	_		20.3	30.30	0.10		1.0	1.8	0.9	0.5
1957		В	0	-	_	20.0	36.37	0.00	-	0.8	0.7	1.5	0.4
1/7	1017	S	0	_	-	20.1	36.00	0.00	-	0.7			
		В	0	_	040	19.4	36.02	0.14	-	1.0			
2/7	1127	S	P	_	8.1	21.9	36.09	0.57	-	0.7	0.6	0.8	0.6
		В	P	_	8.1	22.0	36.15	0.36	0.2	0.7	0.2	1.8	1.3
	STATIC			Dept		25 feet		3.21 N	I		011 W		
1955													
1/12	1430	S	_	1050	-	19.5	35.05						
		В	_	750	~	19.5	35.08						
8/15	1143	S	0	-	-	30.6	33.79						
		B	0	-	-	30.4	35.86						
9/20	1142	S	0	_	-	29.4	34.38						
		В	0	-	-	29.8							
10/20	1617	S	0	-	-	23.8	33.21						
		В	0	-	-	24.6	34.69						
10/21	0836	S	0	-	-	23.5	34.13						
1956		В	0	_	-	23.5	34.13						
6/6	1516	S	0	-	_	28.8	37.27						
		В	0	_	_	28.7	37.26						
7/12	1422	S	0	_	_	30.6	37.45						
.,		В	0	_	que.	29.4	37.37						
9/14	0747	S	0	_	•	27.0	37.31						
7144		В	0	***	_	27.0	37.37						
12/11	0811	S	_	0.3	000	19.4	36.02						
12/11	0011	В	0	_	_	19.4	36.11						
	CT 1 TI			Dan	+1- ~6	16 feet	26° 2	и 61 s	T	910	57.7' V	NT.	
1954	STATIO			Бер	11 01				-		7101	_	
4/8	0843			_	-		33.79						
/ 10	1	В	0	-	-	25.8	33.70						
6/2	1525	S	P	_	-	28.2	33.73						
6/10	1022	S	P	-	-	29.9	31.98						
- 1		В	0	-	-	29.1	33.80						
8/27	1230	S	0	_	-	31.7	30.05						
		В	0	-	-	30.3	33.68						
9/24	1440	S	0	-	-	28.5	32.56						
		В	0	-	-	28.8	32.81						
10/6	1810	S	0	100	~	28.2	30.25						
		В	0	4.5.0	-	27.8	33.15						
10/25	1705	S	-	450	***	23.4							
		В	-	225	-	23.5							

	SIAIR			O O I I C	~ /						2:0		
		S							F	04	NO -		
Date	Time	or		oreve	pΉ	°C	Sal.	Cu.			NO	Car.	Pro.
		В	C,	M.					In.	Tot.	NO ₂		
11/1	1352	S	_	45	_	22.3	28.31						
		В		33	-	22.2	32.90						
11/1	1750	S	_	90	-	22.0	22,,						
							22 07						
11/2	1753	S	-	210	-	22.0	32.97						
11/24	1510	S	***	60	-	0.0	32.65						
		В	-	170	-	-	33.40						
12/8	1809	S	-	20	-	18.1	33.42						
12/16	0820	S	-	45	-	16.8	32.29						
		В		10	-	17.3	34.52						
12/28	1010	S	P	_	-	17.7	32.77						
		В	0	_		17.8	32.81						
1955	1705						33.82						
1/10	1705	S	-	45	-	20.2							
1/12	0923	S	-	10	0-0	19.2	34.20						
		В	P	-	-	19.4	34.27						
1/20	1519	S	0	-	-	18.4	33.55						
		B	0	-	-	18.3	34.29						
1/26	1616	S	0	-		16.8	33.82						
		В	P		_	16.6	33.87						
1/27	0802	S	0	_		16.2	33.82						
-,		В	0	_	_	16.0	33.91						
2/9	1837	S	0	949	_	18.4	34.90						
2/7	1057	B	0	_		18.3	34.83						
2/10	1755			-	-		37.03						
2/10	1755	S	0	-	-	19.9	24.00						
		В	0	_	_	18.5	34.99						
2/15	0859	S	0	-	-	14.0	34.07						
2/23	1010	S	0	-	-	18.7	34.38						
		B	0	-	-	18.2	34.72						
3/10	1816	S	0	-	-	23.0	35.23						
		В	0	-		22.8	35.26						
3/30	0938	S	0	-	_	18.3	35.77						
		В	0	-	44	18.1	35.77						
4/12	1117	S	0			24.0	36.20						
1/12	4441	В		_	_	24.1	36.22						
6/2	0049			-	_	28.6	36.82						
0/2	0948	S	0	_	-								
() -	1005	В	0	-		28.6	36.86						
6/1	1335	S	0	-	-	30.3	36.96						
		В	0	-	¬	29.2	37.00						
6/20	0946	S	0	-	-	28.0	36.33						
		В	0	-	-	27.9	36.56						
6/21	1005	S	0	_		29.0	36.64						
		В	0	-	-	28.5	36.55						
6/23	1539	S	0	_	_	29.9							
, 25	/	В	0		-	29.7	36.29						
6/27	1547	S	0		_	31.1	36.58						
0/21	121			_	_								
		В	0	-		31.1	36.61						

-	DIAIR	S					C - 1		P	04	NO-3		
Date	Time	or B	G. I	M.	F.q	°C	Sal.	Cu.	In.	Tot.	NO ₂	Car.	Pro.
6/28	0807	S	0		_	30,3	36.40						
0/20	0001	В	0		_	30.2	36.36						
6/29	1813	S	0		***	30.9	36.38						
		В	0	_	•••	31.0	36.50						
7/18	1137	S	0	-	-	30.9	34.92						
		E	0	-	-	30.2	35.37						
7/22	0720	S	0	-	-	29.4	34.13						
		В	0	-	-	29.3	34.42						
8/2	0937	S	0	-	-	29.2	34.00						
		В	0	-	-	29.4	34.18						
8/15	1114	S	0	↔	-	31.1	33.17						
		В	0		-	30.6	35.34						
9/12	1156	S	0	-	-	30.5	26.91						
		В	0	-	-	29.1							
9/20	1125	S	0	-	-	29.1	31.92						
0.105		В	0		-	29.2	32.54						
9/27	1119	S	0	-	-	28.8	34.05						
10/20	1/22	В	0	-	-	28.8	34.05						
10/20	1632	S	0	-	_	23.8	33.30						
11/1	1212	В	0	_	_	24.0	34.18						
11/1	1213	S	0	_	-	23.0	33.49						
12/5	1611	B S	0	-	-	23.7	33.95						
12/5	1011	В	0	_	-	20.7	34.11 34.78						
1956	1442			-	-								
1/31	1642	S B	0	_		18.6 17.8	35.43 35.36						
5/9	0739	S	0	-	_	27.6	37.63						
317	0137	В	0	_	-	27.5	37.63						
5/24	0906	S	0	_	_	28.0	37.30						
5,21	0,00	В	0		-	27.8	37.46						
6/6	1634	S	0	***	_	29.5	37.35						
·		В	0	-	-	29.0	37.52						
6/22	0831	S	0	-	_	28.5	37.57						
		В	0	010	-	28.5	37.40						
6/25	1452	S	0	***	-	29.7	37.32						
		В	0	-	-	29.7	37.44						
9/6	1109	S	0	000	_	29.3	36.55						
		В	0		0.0	29.0	36.67						
9/13	1801	S	0	-	-	27.2	36.62						
		В	0	-	-	27.3	36.51						
10/29	1644	S	0	neo	-	24.7	34.17						
		В	0	-	-	24.5	34.98						
12/10	1615	S	0	-	-	21.0	35.20						
		В	0	-		20.0	35.89						

		S	`						F	PO ₄	NO-		
Date	Time	or	G. h	oreve	рН	°C	Sal.	Cu.		4	NO.	Car.	Pro
		В	C.	M.	_				In.	Tot.	NO 2		
1957													
1/7	1744	S	0	-	-	19.5	35.97						
		B	0	040		19.0	35.89						
2/7	0929	S	-	0.2	-	23.0	36.15						
		В	0	-	-	23.0	36.04						
3/12	1503	S	0	-		20.5	34.16						
		В	0	-	•	19.4	34.50						
5/28	0951	S	P	-	-	29.3	34.37						
		В	0	~	-	29.4	35.08						
5/29	1027	S	Þ	-	-	30.0	34.83						
		В	P	-	_	29.8	35.09						
6/6	0920	S	0	-	-	30.0	33.58						
		В	0	-	•	29.8	35.16						
6/12	0959	S	-	0.7	-	29.0	34.70						
		В	0	-	_	29.1	36.18						
6/19	0947	S	P	~	-	29.4	35.77						
		В	0	_	-	29.0	35.91						
6/26	1240	S	0	~	-	30.4	35.60						
		В	0	-	_	30.2	35.63						
	STATIO	ON E	3 75	Dept	h of	16 feet	26°2	3.71 I	J	81°	55.61 W	T	
1954													
2/16	1325	S	P	tion	_	20.2	33.69						
- 1-		В	P	-		20.0	33.69						
3/3	1215	S	P	-	_	19.8	32.41						
- 1 -		В	P		_	19.2	33.31						
9/10	1250	S	0	~	_	30.1	32.77						
		В	0	~	_	29.8	34.20						
10/29	1031	S	P	-	~	24.2	33.30						
11/1	1413	S	0		•	23.2							
		В	_	75		22.7	33.22						
11/4	1503	S	_	30	-	21.7	33.80						
11/7	0628	S	_	60	-	20.0	32.72						
11/8	0620	S	_	20	-	18.8	33.04						
11/9	0614	S	-	8	_	19.5	33.22						
11/10	0643	S	-	50	-	19.5	33.22						
12/9	0844	S	-	45	-	17.7	33.39						
12/22	0924	S	P	040	_	15.7	33.49						
1055	0 /2 4	5	-	_									
1955				_	_		27.09						
1/10	0954	S	0		_	20.3	27.09 33.66						
		S S	0		-	20.3							
1/10 1/26	0954 0804	S	0		-	20.3 16.5 16.5	33.66						
1/10	0954	S S B	0 0 0			20.3 16.5 16.5 18.6	33.66 33.73						
1/10 1/26	0954 0804	S S B	0 0 0			20.3 16.5 16.5	33.66 33.73 34.99						

	STATIC	ם אנ	()	(Contra	.,								
		S							P	0	NO-		_
Date	Time	or	G.	breve	рН	°C	Sal.	Cu.	_	4	NO.	Car.	Pro.
		В	C.	M.					In.	Tot.	NO		
2/28	1635	S	0	_	_	20.7	35.37			-			
		В	0	-	-	19.7	35.35						
3/10	0926	S	0	_	-	21.7	35.44						
3/16	1558	S	0	-	-	24.9	35.88						
		В	0	-	-	24.9	35.81						
3/31	1004	S	0	_		19.8	36.18						
6/20	1626	S	0	***	-	28.8	36.20						
		В	0	-	-	28.4	36.47						
8/15	1651	S	0	-	_	-	35.55						
		В	0	***	-	-	35.43						
8/24	1319	S	0	_		31.0	34.87						
		В	0	-	-	31.0	35.16						
10/21	0811	S	0	_		23.2	34.47						
		В	0	-	-	23.3	34.40						
11/30	1603	S	0	-	***	20.7	35.16						
		В	0	-	-	20.8	35.08						
12/20	0904	S	0	-	-	18.1	34.83						
1956		В	0	***	•	18.3	34.92						
1/30	1632	S	0	_	_	18.3	35.42						
2,00		В	0	_	_	17.6	35.37						
5/24	0854	S	0	_	_	28.4	37.35						
0,		В	0	_	-	27.7	37.29						
6/13	1550	S	0	-	-	27.6	37.46						
·		В	0	-	_	27.6	37.47						
7/12	1532	S	0	-	-	30.5	37.64						
		В	0	-	_	29.8	37.56						
7/19	1236	S	0	_	_	31.0	37.60						
		В	0	-	_	30.5	37.60						
7/30	1533	S	0	010	-	30.7	37.60						
		В	0	_	040	30.1	37.64						
11/19	0923	S	0	-		21.5	35.63						
		В	0	-	-	21.6	35.80						
1957 1/24	1045	S	0	-		19.3	36.15						
-,	7	В	0	_	_	19.0	35.93						
1/30	1312	S	P	-	_	22.7	36.02						
5,00		В	P		-	22.0	36.10						
5/10	1155	S	0	_	_	25.4	34.97						
.,		В	0	_		25.0	35.59						
5/16	1020	S	0	140		29.5	33.93						
- 7		В	0	-	-	27.9	35.26						

,	STATIC	ON B	76	Dept	h of	9 feet	26° 2	4.3' N		81° 5	531 W		
1		S			,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,				P	0	NO-		
Date	Time	or	G.	breve	рН	°C	Sal.	Cu.		4	NO.	Car.	Pro.
		В	C.	М.					In.	Tot.	NO 2		
1954	0000	-	D			24.1	22 04					-	
4/23	0900	S	P	-	0-0	24.1	33.84						
6/24	0740	S	0		-	28.9	32.48						
7/9	0718	S	-	15	_	28.8	31.42 29.45						
7/12	0650	S	0	150	-	29.3 29.5	24.33						
7/31	0825	S S	••	130		30.6	31.00						
7/31	1430	S	0	13		29.1	17.09						
8/1	0815	S	P		-	31.1	32.84						
8/2	1150 0715	S	0	_	•	30.5	27.23						
8/4 8/10	0830	S	P		_	30.8	29.49						
9/1	0745	S	P	_	_	27.5	28.91						
9/1	1030	S	P	_	_	29.3	33.31						
9/9	0630	S	0	•		28.3	29.90						
9/17	1000	S	0	_	-	28.1	28.91						
10/28	0710	S	_	250	_	23.6	20.71						
12/17	0715	S	0	250	_	15.5	35.50						
1955	0715	D	0	_	_	13.3	33.30						
1/1	0915	S	0	0-0	-	20.8	33.37						
1/31	1030	S	0	⊷	-	15.0	32.90						
5/19	1452	S	0	-	-	29.1	36.69						
6/10	0945	S	0	-		29.0	37.07						
6/17	0953	S	0	_	-	27.4	35.99						
7/7	1543	S	0	-	-	29.9	34.94						
7/14		S	0	040	-	30.5	28.24						
8/2	1630	S	0	-	-	29.4	26.98						
8/12		S	0			31.1	30.43						
9/9	0925	S	0	944	-	26.3	22.14						
9/15		S	0		-	31.0	23.84						
9/22		S	0	_	-	32.5	18.96						
10/3	1510	S	0	-	-	29.2	33.60						
10/19		S	0	_	-	24.5	32.63						
	1136	S		-	-	25.9							
11/8	1040	S	0	-	-	22.0	33.85						
11/28		S	0	-	•••	24.3	34.60						
12/13		S	0	0-0	-	18.5	33.80						
12/19 1956	1850	S	0	•	000	18.5	34.48						
1/4	1412	S	0	_	_	18.1	34.92						
1/11		S	0	_	_	13.2	35.01						
2/14		S	0	94%	_	20.0	35.24						
2/29		S	0	pak	_	20.6	36.26						
3/14		S	0	_		26.0	36.45						
3/26		S	0			19.6	37.38						
4/3	1340	S	0	_	-	23.0	37.62						
4/16		S	0	-	-	24.9	37.74						

	DIATIC			, , , , , , ,					P	0	NO-		
D	TD:	S	(l	T. T	0.0	Sal	Cu.	Ľ	4	- 3	Car.	Dan
Date	Time	or		breve	рН	°C	Sal.	Ou.	In.	Tot.	NO ₂	Car.	PTO
1-20	3545	В	С.	M.		21.0	37 07		1114	101.			
4/18	1545	S	0	-	-	24.0	37.07						
6/26	1610	S	0	-	-	30.4	38.08						
7/2	1450	S	0	***	***	30.5	38.51						
7/17	1440	S	0	- Cold	_	31.3	33.05						
7/30	1558	S	0	-		31.0	36.95						
S/o	1240	S	0	-	-	32.1	37.08						
8/13	1437	S	0	-	-	32.0	38.12						
8/27	1519	S	0	_	-	32.8	35.82						
9/4	1252	S	0		-	30.0	36.59						
9/13	0953	S	0	-	_	25.7	32, 22						
9/24	1320	S	0	-	***	28.2	35.84						
10/2	1400	S	0		-	29.0	34. 68						
10/8	1238	S	0	-	440	29.0	32.64						
10/17	1456	S	0	-	-	25.5	31.47						
11/1	1400	S	0	-	-	24.5	35.19						
11/7	1352	S	0	wall	-	23.7	34.48						
11/15	1350	S	0	-	-	22.1	34.76						
11/21	1410	S	0	-	-	24.9	35.51						
11/27	0945	S	0	-	-	16.1	35.06						
12/3	1314	S	0	440	-	18.7	35.01						
12/11	1425	S	0	-	-	21.8	35.43						
12/21	1007	S	0	w	-	22.3	35.48						
1957 1/15	1235	S	0	_	***	21.5	36.13						
1/22	1340	S	0	_	_	20.3	35.90						
1/28	1442	S	0	_	_	22.7	36.07						
2/5	1152	S	0	_	•	24.5	36.03						
2/11	1300	S	0	_	_	25.6	36.38						
2/20	1328	S	0	_	_	22.3	36.09						
3/7	1552	S	0	_	_	22.0	34.15						
		S	P	_	-	21.0	31.67						
3/12 3/18	1322 1456	S	0	_	-	23.5	33.72						
3/10		S	0			24.2	30.32						
4/17	1202	S	0	-	-	24.2	34.92						
4/17	1304	S	0	_	_	26.2	34.48						
4/24	1145	S	P	_	-	25.6	77,70						
5/3	1030	S	0	-	-	27.2	34.40						
5/3	1353	S	0	-	vell vell	26.0	31.78						
5/21	1120	S	0	_	-	31.7	26.44						
5/21	1322	S	0	_	_	30.4	34.35						
5/20	1000	В	0	_	_	30.3	34.41						
5/27	1245	S	0	-	-	30.7	34.35						
6/3	1140	S	0		-	29.7	34.02						
0/11	1304	S	0	-	-	30.2	35.03						
0/17	1240	S	0	-	-	29.5	34.98						

		STATIC	ON B	77	Dept	h of	17 feet	26°2	2.51 N		81° 5	54' W		
-			S							P	0	NO ₃ -		
	Date	Time	or	G.	breve	На	°C	Sal.	Cu.		4		Car.	Pro.
	2000		В	C.	M.	1				In.	Tot.	NO 2		
	1954 8/2	0900	S	0	-		29.4	27.05						
	0/2	.,	В	0		_	29.9	30.73						
	8/27	1249	S	0	_	_	31.4	33.06						
	0/21	101/	В	0	_	_	30.3	34.20						
	9/10	1305	S	0	_		30.0	32.94						
	7/10	1505	В	0	_	_	29.8	34.22						
	10/6	1315	S	0	_	_	28.5	32.90						
	1955	1313	5	V	_	_	20.5	32.70						
•	8/15	1630	S	0	-	_	641	35.26						
			В	0	_	-	_	35.55						
	10/20	1503	S	0	_	-	23.2	33.93						
	1957		В	0	_	_	24.0	34.43						
·	5/10	1145	S	P	_	_	25.3	35.62						
			В	0	_	_	25.2	35.58						
	5/28	1315	S	-	0.3	_	30.7	34.33						
			В	0	_	_	30.3	37.74						
	6/6	0913	S	0	_	-	30.1	34.47						
	0,0	0 / 20	В	0	_	_	30.0	34.82						
	6/19	0925	S	P			28.5	35.41						
	0/1/	0 / 4 3	В	P			28.5	35.46						
					_									
	1954	STATIC	ON B	78	Dept	h of	16 feet	26° 2	1.6' N	_	81°	52. 1' W		
•	8/27	1520	S	P	-	040	31.6	33.24						
	1957													
	4/24	1426	S	0	-	-	26.7							
	5/10	1138	S	P	-	-	25.0	34.88						
			В	0	0-9	-	25.2	35.53						
	5/28	1215	S	P	-		30.7	35.37						
			В	0	_	-	29.6	35.77						
	6/6	0906	S	0	-	_	30.0	34.77						
			В	0	-	_	30.0	35.41						
	6/12	0931	S	0	_	-	29.0	35.63						
			В	0	-	_	29.3	35.91						
	6/19	0919	S	P	-	-	28.7	35.10						
			В	0	_	_	29.0	35,54						
	6/26	1020	S	_	0.2	_	30.0	35.91						
			В	0	_	_	29.9	35.94						
		STATIC	N B	79	Dent	h of	6 feet	26° 2	1.61 N		81°	51.61 W		
	1954	017111		- /	Бери	.11 01	O ICCL	20 2	1.0 1		01	J1. 0 W	•	
	8/2	1130	S	P	_	-	31.1	28.91						
	9/16	1135	S	0	_	-	29.7	33.75						
	10/12	0927	S	P	_	_	27.3	33.69						
	10/25	0950	S	-	350	_	23.1	33.48						
	10/29	1101	S	-	175	_	24.0	33.30						
	11/1	1432	S		35	_	22.4	33.35						
	11/4	1523	S	0	**	-	21.9	32.92						
	12/9	0905	S	_	10	_	17.1	32.94						

	D12111	S							T	0	NO		
Date	Time	or	C	breve	рН	°C	Sol.	C	Р	O ₄	NO -		70
Date	Tille	В	C.	M.	рn	C	Sal.	Cu.	In.	Tot.	NO ₂	Car.	Pro.
1955			<u> </u>	TAT®					111.	TOL.			
1/26	0848	S	0	_	940	14.9	32.34						
5/4	1055	S	0	_	***	25.6	37.45						
5/12	0929	S	0	_	_	28.2	37.38						
5/18	1445	S	0	-	-	31.0							
5/26	0935	S	0	_	-	29.0	37.12						
6/2	1318	S	0	-	_	29.8							
6/7	1202	S	0	-	-	30.8	37.90						
6/16	0951	S	0	-	_	27.8	36.64						
6/22	1142	S	0	_	_	30.3	36.49						
7/6	0933	S	0	~	•	30.4	36.37						
7/19	0908	S	0	-	_	30.8	35.28						
7/13	1310	S	0	_	-	31.6	21.31						
7/25	0900	S	0	-	•	29.5	31.67						
8/1	0945	S	0	ma	-	29.7	34.65						
8/12	1200	S	0	949	-	31.1	29.36						
8/17	1028	S	0	-	-	30.0	34.61						
8/25	1530	S	0	-	-	31.1							
9/2	1430	S	0	-	-	33.0	31.78						
9/7	1105	S	0	-	-	29.0	26.08						
9/16	0900	S	0	-	-	29.1	33.03						
9/22	1050	S	0	-	-	30.2	18.60						
10/3	1610	S	0	-	-	24.5	28.40						
10/19	1650	S	0	_	-	24.6	32.43						
10/26	1240	S	0	-	-	25.9	28.22						
11/8	1155	S	0	-	-	23.0	31.97						
11/18	0900	S	0	•	-	23.5	32.23						
11/28	1230	S	0	-	-	25.0	34.94						
12/13	1430	S	0	_	₩	19.3	34.15						
12/19	1515	S	0	-	-	19.5	34.76						
12/29	1013	S	0	₩	-	19.0	35.09						
1956 1/4	1023	S	0	_		17.5	34.13						
1/11	1422	S	0	_	•	14.1	34.74						
1/18	1015	S	0	_	_	12.6	34.45						
1/23	1440	S	0	_	_	19.5	35.45						
1/31	1430	S	0	_	_	19.5	35. 27						
2/6	1425	S	0	_	-	23.5	35.47						
2/14	1431	S	0	_	-	20.5	35.05						
2/29	1400	S	0	_		21.1	36.27						
3/14	1326	S	0	_		26.0	36.27						
3/26	1535	S	0	840		19.9	37.58						
4/3	1345	S	0	-	-	23.0	37.11						
4/18	1550	S	0	_	_	23.8	36.96						
5/8	1250	S	0	_	_	29.5	36.62						
5/22	1710	S	0	•		29.8	36.25						

_												210		
			S						-	P	PO 4	NO 3	-	-
	Date	Time	or		reve	рН	°C	Sal.	Cu.			NO ₂	Car.	Pro.
_			В	C.	M.					In.	Tot.	2		
	6/26	1620	S	0	-	-	32.0	38.32						
	7/2	1610	S	0	•••	•	30.9	38.96						
	7/17	1448	S	0		-	32.1	37.12						
	7/30	1605	S	0	-	-	30.5	37.19						
	8/6	1255	S	0	-	-	32.2	37.80						
	8/13	1447	S	0	-	_	32.0	37.50						
	8/27	1530	S	0	_	-	32.7	36.75						
	9/4	1258	S	0	_	-	29.7	37.10						
	9/24	1337	S	0	_	-	28.5	36.78						
	10/2	1406	S	0	-	-	29.2	34.78						
	10/8	1245	S	0	_	-	28.5	36.46						
	10/17	1500	S	0	-	-	25.5	21.78						
	11/1	1408	S	0	_	_	25.5	26.84						
	11/7	1359	S	0	_	•	24.0	35.49						
	11/15	1404	S	0		_	23.0	29.16						
	11/21	1400	S	0	_	_	25.0	33.89						
	11/27	0952	S	0	_	•	17.5	34.97						
	12/3	1320	S	0	_	•	19.0	36.00						
	12/11	1432	S	0	_	_	24.0	33.79						
	12/21	1014	S	0	_		22.3	35.12						
	957	1014	3	O	_	_	22. 3	33.12						
	1/15	1240	S	0	•••	-	21.6	35.90						
	1/22	1352	S	0	_	-	-	36.00						
	1/28	1448	S	0	-	-	23.0	36.08						
	2/5	1159	S	0	-	-	24.0	36.07						
	2/11	1308	S	0	-	-	25.0	36.19						
	2/20	1338	S	0	-	-	22.5	36.18						
	3/7	1559	S	0	_	-	23.0	31.79						
	3/12	1330	S	0	_	-	22.5	31.86						
	3/18	1500	S	0	_	_	24.0	34.27						
	3/27	1400	S	0	_	_	25.1	32.47						
	4/17	1210	S	0	_	-	24.5	34.80						
	4/22	1358	S	0	_	_	26.0	33.90						
	4/24	1410	S	0	-	_	26.5							
	5/3	1035	S	0	-	_	26.5	35.32						
	5/7	1359	S	0	_	_	26.7							
	5/21	1131	S	0	_	_		13.75						
	6/3	1155	S	0			29.5	34.47						
	6/5	1515	S	0		_	32.2	34.02						
	6/17	1245	S	0	-		29.5	35.52						
	0/11				-						0.10			
	1955	STATI	ON E	3 80	Dep	th of	28 feet	26° 20	0.3' 1	7	81	57.31 W	_	
	10/20	1521	S	0	-	-	24.2	35.08						
	1956		В	0	_	-	24.6	35.26						
	2/2	1502	S	0	-	-	18.5	35.98						
			В	0	↔	-	18.9	35.88						

	STATIC)IN E	00	Contra	1)								
		S							F	0,	NO-		
Date	Time	or	G.	breve	рΗ	°C	Sal.	Cu.		4	NO 3	Car.	Pro.
		В	C.		•				In.	Tot.	2		
5/9	0722	S	0			26.4	36.78						
3//	0.22	В	0	_	00	26.4	36.96						
6/6	1616	S	0	-	_	28.7	38.18						
0,0	1010	В	0	_	_	28.0	37.30						
7/12	1441	S	0	_	**	30.4	38.07						
1712		В	0	648	-	29.5	37.75						
11/19	0941	S	0	0.0	-	22.0	36.30						
	-,	В	0		-	22.0	36.16						
1957 2/7	1008	S	0	040		22.1	36.15						
271	2000	В	0	-		22.4	36.04						
	STATIC			Dept	th of	35 feet		8.211	V	82°	04.51	w	
1954								-	-			_	
3/18	1143	S	P	648	-	18.3	34.34						
8/3	1140	S	0	~	**	30.7	31.74						
		В	0	•	-	30.7	33.87						
10/12	1743	S	0	••	•	27.8	34.81						
		В	0			27.6	34.99						
10/25	1558	S	**	325	-	23.9							
		B		225	**	23.5							
12/9	1538	S	-	250	-	19.6	34.74						
1955		В		125	-	19.4	34.78						
1/4	1047	S	-	85	-	19.1	34.99						
		В	**	70	-	18.7	35.17						
1/10	1623	S	-	1050	**	20.1	34.97						
		В	_	55	-	19.4	35.01						
1/12	1018	S	***	1250	-	19.2	35.14						
1/26	1523	S	-	550	**	17.6							
		В	-	45	**	17.6	35.28						
6/20	1042	S	0	-	***	28.4	36.89						
		В	0	-		28.2	36.67						
7/6	1122	S	0	-	-	29.9	37.06						
		В	0	-	-	29.8	37.04						
7/22	1217	S	0	646	460	30.0	36.67						
		В	0	-	440	30.5	35.84						
8/15	1443	S	0	-	-	30.3	36.68						
		В	0	-	-	30.0	36.68						
8/17	1605	S	0	-	900	31.7	36.64						
		В	0	-		30.6	36.65						
8/31	1500	S	P	-		30.5	36.02						
		В	0	-	**	30.8	35.90						
9/14	1600	S	0	-	**	29.9	34.00						
		В	0	***	-	29.3							
9/29	1532	S	0	-	-	30.0	36.42						
		В	0	-	-	29.9	36.58						

ħ.		Dizzi		01 (00110 -	•								
-			S			_				I	PO ₄	NO-		
	Date	Time	or	G. b	reve	pН	°C	Sal.	Cu.			NO NO	Car.	Pro.
			В	C.	M.					In.	Tot.	NO ₂		
-	11/3	1457	S	0	-		25.0	35.71						
			В	0	_	_	24.1	35.50						
1	1956		-				_ , _							
	6/25	1412	S	0	_	-	29.7	37.11						
			В		0.2	_	29.6	37.08						
		am. m.c							0.1.3	T	0.2.0	00 71 33		
,	954	STATIC)N E	3 82	Depi	th of	33 feet	26° 1	3. 9. I	_	84	00.71 W	_	
1	3/18	1213	S	P	_	-	19.4	34.33						
	10/6	1736	S	0	_	_	28.7	34.58						
	, .		В	0	***	_	28.1	34.74						
	10/22	1430	S	0	_	•	24.1	32.07						
	10/29	1252	S	_	4	-	24.9	35.19						
	11/1	1652	S		900		23.1	35.01						
1	955	1052		010		-								
ľ	1/12	0959	S	-	150	-	19.2	35.14						
			В	_	45	-	19.3	35.14						
	2/9	1803	S	P	***	-	18.1	35.50						
			В	0	_	-	17.9	35.53						
	2/23	1042	S	0	_	-	18.0	35.26						
	•		В	0	***	-	17.5	35.44						
	3/10	1746	S	0	848	_	21.0	35.75						
			В	0	-	_	20.7	35.75						
	6/23	1509	S	0	***	-	29.3	36.91						
	0,23	130,	В	0		_	28.9	36.96						
	7/6	1100	S	0			29.8	36.93						
	.,0	1100	В	0	_	_	29.6	36.88						
	8/4	1524	S	0	•••	-	29.4	35.88						
	0/1	1364	В	0		_	29.4	35.97						
	8/15	1525	S	0			30.3	36.48						
	0/15	1525	В	0	_	-	30.0	36.31						
	0./20	0027	5 S		••	-								
	8/30	0927		0	-	_	30.0	35.75						
			В	0	-	-	30.0	35.68						
	10/20	1540	S	0	-	-	25.0	35.05						
		,	В	0	-	-	24.7	34.99						
	12/1	1639	S	0	***	-	20.5	35.52						
:	1956		В	0	-	-	20.8	35.50						
	5/15	1234	S	0	-	***	27.5	37.11						
			В	0	-	-	27.2	37.19						
	5/22	1414	S	0	-	-	28.1	37.24						
			В	0	_	-	27.8	37.17						
	6/6	1537	S	0	_	649	28.7	37.24						
			В	0	_	-	28.5	37.38						
	11/19	1017	S	0	-	-	22.0	36.77						
	, _ ,		В	0	_	-	22.0	36.60						
	12/10	1521	S	_	0.3	-	20.0	36.21						
		1001	В	0	_	_	20.1	36.37						
			البيد	-										

	STATIC	NV F	5 82 (Cont'o	1)								
		S							P	0	NO - 3		
Date	Time	or		reve	рН	°C	Sal.	Cu.	T.,		NO ₂	Car.	Pro
		В	C.	<u>M.</u>					In.	Tot.			
1957 1/7	1655	S	0		_	19.9	36.14						
		В	0	_	_	19.2	36.01						
2/7	1047	S	0	_	•••	22.0	36.23						
		В	0	-	-	22.0	36.15						
	STATIC	ON E	8 8 3	Dep	th of	24 feet	26° 1	91 N		81°	53.31 W	r	
1954							2.2.40		-			-	
8/2	0935	S	P	-	-	30.1	31.49						
0 /07	1220	В	0	•	-	30.4	33.33						
8/27	1320	S	0	-	-	31.5	34.38 34.33						
2016	1220	B S	0	-	•	3 0.0 28.5	33.17						
10/6	1338	В	0		_	28.3	33.91						
1955	1553			_									
6/20	1551	S	0	-	•••	29.1 28.5	36.69 36.82						
10/20	1445	B S	0	0.00	-	24.3	35.35						
10/20	1440	В	0		-	24.5	35.55						
1956				-	-								
7/19	1300	S	0	***	-	31.0	37.68						
		В	0	_	-	30.4	37.78						
7/30	1508	S	0	-	-	30.1	37.56						
1957		В	0	-	-	29.9	37.56						
5/10	1215	S	P	-	-	25.2	35.66						
		В	0	010	-	25.4	35.72						
6/12	1204	S	-	0.2	-	29.6	35.42						
		В	P	-	-	29.0	36.00						
1054	STATIC	N E	8 8 4	Dep	th of	25 feet	26° 1	7.4' N	4	81°	55.5' W	_	
1954 2/16	1300	S	P	_	_	20.0	33.98						
2/10	1500	В	P	-	_	19.8	34.45						
3/3	1150	S	P	_	_	20.0	33.82						
3/3	1150	В	P	010		19.2	34.40						
3/18	1240	S	P	•••		20.3	33.31						
8/2	1000	S	0	-	_	30.1	32.94						
- • -		В	0	-	-	30.4	33.33						
8/27	1332	S	0	010	_	31.5	34.38						
		В	0	_	-	30.1	34.58						
10/6	1711	S	0		***	28.6	33.86						
		В	0	-	-	28.1	34.22						
10/12	1000	S	0	-	**	27.5	35.01						
		В	0	00	•	27.4	34.90						
10/25	1018	S	0	-	-	23.5	34.36						
11/1	1420	В	0	000	-	23.6	34.56						
11/1	1628	S	•	900	-	22.9	30.72						

			S							- D	0	NO		
	Data	Time		C 1		T T	۰.	Col	C	P	4	NO ₃ -	C -	D .
	Date	Time	or		oreve	рН	°C	Sal.	Cu.	<u> </u>		NO_2	Car.	Pro.
,	22/4	1/22	В	C.	M.			24 45		In.	Tot.			
	11/4	1622	S	-	8	-	21.9	34.45						
	/ . 0	1/00	В	-	100	-	21.7	34.52						
	11/18	1620	S	0	-	**	24.0	34.33						
	12/9	0940	S	-	350	-	19.1	34.70						
			В	84	250	-	19.2	34.65						
	12/22	0959	S		125	**	16.1	34.22						
	1955		В	-	18	-	16.4	34.47						
	1/4	1136	S	-	45	-	19.8	34.78						
			В	-	25	***	18.9	35.34						
	1/10	1024	S	-	35	-	20.0	34.70						
			В	-	85	040	19.5	34.88						
	1/26	0918	S	**	75	-	17.0	35.12						
			В	-	60	-	17.3	35.14						
	2/8	1244	S	P	-	-	18.1							
			В	P	*	-	18.0	35.03						
	2/24	1732	S	0	-	-	19.3	34.51						
			В	0	-	-	17.3	35.71						
	3/10	1000	S	0	-	~	20.9	35.82						
			В	0	-	-	20.9	35.86						
	3/16	1510	S	0	-	-	23.4	36.00						
			В	0	-	040	23.3	35.97						
	3/31	1037	S	0	-	-	20.9	36.26						
			В	0	-	-	20.9	36.18						
	6/2	1034	S	0	-	-	29.0	36.96						
			В	P	-	-	28.9	37.08						
	6/20	1540	S	0	-	-	29.3	36.67						
			M	0	-	-	28.9	36.76						
			В	0	-	-	28.8	36.87						
	6/21	1047	S	0	-	-	29.0	36.87						
			В	0	-	-	28.4	36.82						
	7/6	1027	S	0	-	-	29.7	36.81						
			В	0	-	•	29.5	36.93						
	7/18	1050	S		-		30.7	36.11						
			В	0	849	-	29.8	36.15						
	8/2	0859	S	0	***	849	29.1	35.43						
			В	0	-	84	29.2	35.70						
	8/24	1242	S	0	-	-	31.0	35.84						
			В	0	04	-	30.9	35.84						
	8/30	0855	S	0	-		29.3	34.36						
			В	0	-		29.9							
	9/12	1127	S	0	-	-	29.5	32.63						
			В	0	-	-	28.9	33.80						
	9/20	1046	S	0	-	04	29.2	35.66						
			В	0	-	-	29.3							

		S							Dr		NO-		
Data	Time		G. b	M 0 7 7 0	рН	°C	Sal.	Cu.		O ₄	3	C	D., .
Date	Time	or	C.	M.	рп	C	Sal.	Cu.	In.	Tot.	NO	Car.	Pro.
9/27	1042	B S	0			28.7	35.55		ш.	101.	4		
7/41	1044		0	des .	-		35.55						
10/20	1422	B S		-	-	28.7							
10/20	1432		0	-	-	24.9	35.71						
1 2 / 2	1120	В	0	-	-	24.7	35.68						
11/1	1138	S	0	_	_	23.4	35.35						
		В	0	-	_	23.8	35.25						
11/30	1535	S	0		_	21.4	35.70						
		В	0	_	-	21.4	35.70						
12/5	1542	S	0	-	-	21.4	35.64						
		В	0	~	_	21.0	35.61						
12/20	0933	S	P	-	8.0	19.0	35.70	0.19	0.5	0.5	-	2.7	2.8
1956		В	P	-	8.1	18.7	35.70	0.10	0.2	0.3	-	7.2	1.2
5/9	0701	S	0	-	8.0	26.9	37.07	0.04	0.1	0.5	0.1	1.6	
, ,		В	0	-	8.1	26.5	37.10	0.10	0.3	0.4	0.1	2.4	0.0
6/6	1559	S	0	_	8.4	28.6	37.95	0.04	0.4	0.5	1.3	1.1	0.1
	,	В	0	_	8.4	28.3	37.30	0.04	_	0.6			
7/12	1459	S	0	-	8.3	29.9	37.65	0.06	0.1	0.9	0.4	1.1	0.0
,,,,,	1-0/	В	0	_	8.2	29.3	37.61	0.18	0.4	1.8	0.2	1. 1	0.4
9/6	1031	S	0	_	8.2	30.0	37.29	0.01	0.6	0.7	0.6	0.3	0.3
770	1031	В	0	_	8.2	30.0	37.29	0.09	0.3	0.4	0.4	0.7	0.1
11/19	0955	S	P		8.1	21.9	36.34	0.06		0.5			
11/17	0755	В	0	-	8.1				0 4		3.6	0.9	0.4
12/10	1542	S	P	-		22.3	36.43	0.03	0.4	0.4	0.1	0.7	0.2
12/10	1542			_	_	20.2	36.32	0.06		0.5	0.0	1.2	0.3
1957		В	0	_	_	20.1	3 6.59	0.04	0.4	0.8	4.8	1.0	0.2
1/7	1713	S	0	-	-	19.9	36.06	0.01	_	0.5			
- 1-		В	0	-	-	19.3	36.09	0.23	-	0.8			
2/7	1024	S	0	_	8.0	22.0	36.15	0.77	0.3	6.8	1.2	0.9	0.4
		В	0	_	8.1	22.1	36.14	0.61	0.3	0.8	1.0	-	0.5
3/28	1013	S	P	_	8.1	22.0	35.25	0.00	0.0	0.5	0.6	1.8	0.4
	Ť	В	0	-	8.1	21.8	35.34	0.06	0.0	0.5	1.5	2.6	0.5
	STATIC	ON B	85	Dep	th of	6 feet	26° 1	7.51 N	ſ	81°	49.31 W	7	
1954									_			_	
8/16	1430	S	-	250	-	31.0	33.57						
		В	0	-	-	31.0	33.80						
8/27	1440	S	~	15	-	31.1	33.91						
		В	-	35	-	30.3	34.11						
10/6	1354	S	_	125	-	28.7	29.49						
10/12	1026	S	~	275	-	27.7	34.18						
		В	-	88	-	27.7	34.47						
10/25	1045	S	-	450		23.3	33.64						
		В	P	•	-	23.3	33.78						
10/29	1128	S	_	275	-	24.5	33.66						
11/1	1455	S	_	100	ene	22.9	33.95						
		В	_	100	-	22.5	33.93						

		S							T	20	NTO		
77-4-	Time o		C h		m T T	°C	Col	C.,	F	0	NO-	C	D
Date	Time	or	G. b		рН		Sal.	Cu.	T.,	TT -4	NO2	Car.	Pro.
/ /		B	C.	М.		2	00 / 1		In.	Tot.	4		
11/4	1547	S	-	80	-	21.5	33.64						
/ - 0		В	-	40	-	21.3	33.89						
11/10	1435	S	-	7	-	22.4	33.82						
12/9	1005	S		10	-	18.1	33.55						
1955		В	-	10	-	18.6	33.78						
1/10	1050	S	_	100	-	20.5	34.52						
1/26	0945	S	0	-	-	16.8	33.93						
5/12	1000	S	0	-	-	28.1	36.83						
5/26	1010	S	0		-	29.6	36.15						
6/2	1350	S	0	-	-	30.0	36.64						
6/7	1243	S	0	-	-	29.7	36.92						
6/16	1105	S	0	_	-	28.0	36.94						
6/22	1220	S	0	000	-	30.8	36.78						
7/6	1014	S	0	-	_	29.3	26.44						
7/19	0940	S	0	-	-	30.5	17.88						
7/13	1344	S	0	-	**	30.5	4.63						
7/25	0928	S	0	_	-	29.8	17.02						
8/1	1020	S	0		_	28.4	12.45						
8/12	1233	S	0	_	-	31.1	13.19						
8/17	1033	S	0		_	30.0	31.15						
8/25	1600	S	0	•	_	31.2	12.27						
9/2	1246	S	0	**	-	32.0	23.40						
9/7	1145	S	0	_	-	28.0	4.25						
9/16	0943	S	0	-	-	29.1	0.74						
9/22	1015	S	0	-	-	30.2	1.72						
10/3	1630	S	0	_	***	29.2	19.49						
10/19	1710	S	0	_	-	25.0	26.02						
10/26	1305	S	0	-		25.6	32.25						
11/8	1230	S	0	-	_	23.0	32.89						
11/18	0928	S	0	-	-	24.0	31.28						
11/28	1155	S	0	-	mb	25.0	34.04						
12/13	1453	S	0	_	_	19.0	34.19						
12/19	1540	S	0	_	↔	21.0	33.80						
12/29	1045	S	0	-	-	19.3	33.25						
1956													
1/4	0955	S	0	-	-	17.6	35.28						
1/11	1449	S	0	-	~	14.6	34.44						
1/18	0945	S	0	-	-	12.5	34.80						
1/23	1415	S	0	-	-	15.8	35.73						
1/31	1415	S	0	-	sub	21.0	35.18						
2/6	1346	S	0		-	23.8	34.78						
3/26	1506	S	0	-	-	21.2	37.03						
5/8	1325	S	0	-	-	29.4	36.68						
5/22	1730	S	0	-	-	29.5	36.57						
7/17	1456	S	0	-	-	33.0	35.16						

	DIAIR		03 (0	JOIIL C	-7								
		S							P	O_4	NO ₃ -		
Date	Time	or	G. b:	reve	pН	°C	Sal.	Cu.		4		Car.	Pro.
		В	C.	М.					In.	Tot.	NO_2		
12/18	1425	S	0	-	_	25.0	35.99						
12/19	1912	S	0	_		23.2	36.13						
1957			0										
1/9	0900	S	0	-	***	20.0	35.83						
4/24	1445	S	0	•	-	27.1							
5/23	1500	S	0	-	nue.	30.4	7.94						
6/5	1540	S	0	_	-	32.5	20.47						
6/19	1211	S	0	→	-	29.5	35.47						
		В	0	_	•	29.1	36.22						
6/26	0955	S	0	-	•••	30.0	36.35						
		В	0	_	949	30.0	36.42						
	STATIO	N B	86	Dent	h of	62 feet	26° 1	6.9' N		82°	28.7' W		
1955									-			-	
3/30	1524	S	0	-	7.9	21.0	36.53	0.34					
		В	0	-	8.0	20.7	36.44	0.34					
?/22	1141	S	0	•	8.3	30.0	36.69	0.06					
		В	0	_	8.3	29.4	36.80	0.06					
12/20	1215	S	0	-	8.2	21.3	36.21	0.17	-	-	-	0.5	0.1
1956		В	0		8.3	20.8	36.05	0.28	0.0	0.0	_	0.5	
3/13	1555	S	0	_	8.1	23.0	36.07	0.08	0.1	0.2	-	1.0	0.3
		В	0	_	8.1	22.0	36.08	0.09	₩	0.0	-	0.7	0.3
5/15	1019	S	0	-	8.1	26.8	35.96	0.14	0.0	0.3	0.1	0.9	0.0
		В	0	_	8.1	26.4	36.80	0.00	0.1	_	•	0.3	0.0
6/6	1258	S	0	_	8.3	27.8	36.98	0.07	_	0.1	0.1	2.7	0.0
		В	0	_	8.3	27.7	36.98		0.1	0.3	0.9	0.7	0.0
7/12	1216	S	0	_	8.2	30.5	36.85	0.06	0.4	0.8	0.4	4.6	0.3
.,		В	0		8.3	30.0	36.85	0.05	_	1.7	0.0	0.7	0.0
9/14	0931	S	0		8.3	28.3	36.92	0.04	0.1	_	2.5	1.1	0.2
//	- ,	В	0	_	8.3	28.3	37.01	0.06	_	1.0	1.3	0.5	0.0
10/29	1300	S	0	-	8.2	25.9	36.10	0.02	-	0.0	0.1	0.3	0.6
10,0,	1300	В	0	_	8.2	25.6	36.19	0.08	_	0.2	0.8	1.8	0.0
11/19	1241	S	0		8.2	23.7	36.54	0.06	_	0.2	1.8	2.1	•
/-/	1011	В	P	-	8.3	24.0	36.80	0.04	_	0.0	0.6	0.8	0.5
12/10	1236	S	_	0.2	U. J	22.0	36.56	0.06		0.0	0.1	1.8	0.1
	1130	В	0	-	_	22.0	36.58	0.05		0.9	4.1	0.8	0.4
1957	1.4.4.0			_								., 0	
1/7	1448	S	P	-	•	21.5	36.60	0.03	-	0.2			
0 /-		В	0	_	_	20.5	36.43	0.06	-	0.1		. /	0 5
2/7	1252	S	0	-	8.1	21.0	35.97	-	1.0	1.0	1.0	1.6	0.5
		В	0	-	8.1	22.0	36.14	0.04	-	0.7	0.3	0.6	0.0
1954	STATIO	ON B	87	Dep	th of	47 feet	26° 1	7' N		82°	20 t W		
6/10	1215	S	0	-	500	30.3	35.28						
		В	0	-	_	28.2	35.34						
12/28	1218	S	-	15	-	17.8	35.39						
		В	0		-	17.8	35.39						

-		0111110				,				T)	0	NO		
	Data	Time	S	G. bi	2010	nLI	°C	Sal.	Cu.	P	4	NO-	Com	Pro.
	Date	Time	or B	C.	M.	рН		Dal.	ou.	In.	Tot.	NO 2	Car.	rro.
7	955	1104					20 1	25 52		2110	101.			
	1/12	1124	S	-	0.7	-	19.4	35.53						
	. /05	1020	В	0	-	-	19.4	35.55						
	1/27	1020	S	0	_	_	17.6	35.79						
	2/20	1/0/	В	0	_	-	17.7	35.79						
	3/30	1606	S	0	_	-	21.9	36.62						
	4/1	1422	В S	0	-	_	21.5	36.55 36.73						
	6/1	1622	В	0	_	-	29.1 29.0							
	6/20	1156	S	0	-	-	28.9	36.72 36.87						
	0/20	1150	В	0	_	_	28.7	36.82						
	7/22	1115	S	0	-	_	29.4	36.89						
	1/20	1113	В	0	_	_	28.8	36.82						
	9/20	1310	S	0	_	_	30.1	36.11						
	//20	1310	В	0	_	_	30.3	36.33						
	12/20	1142	S	0	_		20.0	36.14						
		1112	В	P	_	_	19.8	36.19						
]	1956 3/13	1633	S	0	_	_	23.0	36.07						
	3/13	1033	В	0	_	_	22.6	36.07						
	5/15	1054	s	0	_	_	26.9	37.11						
	3,13	1031	В	0	_	_	27.0	36.92						
	6/6	1335	S	0	-	-	28.8	37.27						
	, ,		В	0	_	_	28.4	37.38						
	7/12	1254	s	0	-	_	30.5	37.14						
	., .		В	0	_	_	30.0	37.10						
	9/14	0857	S	0	-	-	27.8	37.10						
			В	0	-	-	27.7	37.06						
	10/29	1428	S	0	-	-	25.5	36.32						
			В	0	_	-	25.3	36.39						
	11/19	1202	S	0	-	-	23.5	37.06						
			В	0	-	_	23.5	36.83						
	12/10	1335	S	0	-	-	21.2	36.76						
	0.55		В	0	_	-	21.9	36.73						
	1957 1/7	1523	S	0	_	_	20.5	36.41						
	27.	2000	В	P	_	_	19.6	36.27						
	2/7	1200	S	ō	_	-	21.7	36.15						
	_, .		В	0	_	_	21.5	36.18						
		STATIC			Don	th of	60 feet	26° 17	21 NI		820	171 W		
]	1955				Бер	11 01			14		02	A I VV		
	6/20	1221	S	0	-	-	29.2	36.89						
			В	0	-	-	2 9.0	36.96						
	7/6	1244	S	0	-	-	30.2	36.86						
	- 1		В	0	-	-	29.8	36.86						
	7/20	1340	S	0	-	-	29.5	36.42						
			В	0	-	-	29.5	36.69						

		S			-				P	0	NO-		
Date	Time		G. bi	reve	рН	°C	Sal.	Cu.	_	4	3	Car.	Pro.
Date	1 11110	В	C.	M.	PII		0011	0	In.	Tot.	NO 2	Our.	110.
9/21	1000	S	0			25.8	35.79						
7/61	1000	В	0	_		25.5	35.79						
12/20	1330	S	P	_	_	19.6	36.05						
	1550	В	P	_	_	19.8	36.14						
1956	1457	S	0	_		23.5	36.23						
3/13	1457	В	0	_		22.0	36.00						
6/6	1205	S	0	_	_	27.9	37.06						
0,0	1205	В	0	_	_	27.9	36.94						
6/25	1255	S	0	_	_	29.8	36.99						
0/23	1233	В	0	_	_	29.0	36.95						
7/12	1125	S	0	_	_	29.5	37.01						
1 / 1 2	1125	В	0	_	_	29.6	37.17						
8/9	1211	S	0	_	_	31.6	36.97						
0//	1011	10		0.3	***	30.7	37.02						
		20	P	-		31.0	37.04						
		30	P	-	-	31.0	37.03						
		40	0	••	_	31.5	36.66						
		50	0	_	•••	31.0	37.07						
		В	0	_	_	31.1	36.47						
9/14	1032	S	0	_	_	28.4	36.85						
.,-		В	0	_	-	28.4	36.74						
10/29	1246	S	0	_	_	25.9	36.20						
, .		В	0	_	_	25.2	36.23						
11/19	1337	S	0	_	**	23.5	36.79						
		В	0	-	-	23.4	36.74						
12/10	1146	S	-	0.2	**	20.4	36.71						
1957		В	**	0.3	***	20.5	36.82						
1/7	1404	S	0	-	-	20.6	36.53						
		В	0	_	_	19.9	36.38						
1/22	1225	S	P	-		19.7	36.16						
		В	0	-	000	19.4	36.23						
2/7	1342	S	0			22.0	36.19						
		В	0	-	***	21.4	36.23						
3/7	1438	S	P	-	-	21.9	35.97						
		В	0		-	21.5	35.81						
	STATIO	ON B	89	Den	th of	3 feet	26° 1	51 N		81°	49.5' W	7	
1954				Deb	11 01			11		<u> </u>	-/- 3 11	-	
5/31	1020	S	P	-	-	28.0	34.47						
7/12	0930	S	0	-	-	30.7	33.06						
8/3	1615	S	P	-	000	33.2	32.72						
10/15	1205	S	P	-	010	27.6	31.09						
10/22	1500	S	P	-	-	24.3	33.75						
10/28	1150	S	0	-	-	24.3							

		S							P	04	NO-		
Date	Time	or	G. b		рΗ	°C	Sal.	Cu.			NO	Car.	Pro.
		В	С.	M.					In.	Tot.	2		
1955 2/4	0735	S	0		_	16.8	35.68						
5/4	1134	S	0	-	-	26.1	35.88						
5/12	1018	S	0	-	-	29.3	37.29						
5/18	1410	S	0	_	-	31.0	31,47						
5/26	1035	S	0		-	30.0	36.85						
6/2	1408	S	0	_	_	30.5	36.91						
6/7	1303	S	0	_	_	30.3	37.34						
6/16	1050	S	0	_	_	28.0	36.96						
6/22	1310	S	0	_	-	31.1	36.90						
7/6	1030	S	0	_	_	29.8	36.26						
7/13	1400	S	0	_	_	30.5	35.32						
7/19	0954	S	0	-	-	31.5	35.53						
7/25	0940	S	0	-	_	30.2	35. 12						
8/12	1243	S	0	_	-	31.1	33.13						
8/17	1105	S	0	_	-	30.6	35.23						
8/25	1615	S	0	_		30.5	34.43						
9/7	1210	S	0	-	-	28.2	28.34						
9/16	1000	S	0	_	-	29.1							
9/22	0955	S	0	-	-	30.9	34.83						
10/3	1645	S	0	-	_	29.2	35.37						
10/19	1715	S	0	_	-	24.5	35.28						
10/26	1354	S	0	-	_	25.5	35.07						
11/8	1245	S	0	-		25.0	34.26						
11/18	0955	S	0	-	-	23.5	34.91						
11/28	1130	S	0	•	-	25.0	35.33						
12/13	1505	S	0	-	-	19.8	34.83						
12/19	1411	S	0	-	-	20.8	35.18						
12/29	1100	S	0	-	-	19.2	35.71						
1956	0005	~											
1/4	0935	S	0	-	-	17.5	35.52						
1/11	1501	S	0	-	-	14.2	35.13						
1/18	0935	S	0	-	-	11.0	35.25						
1/23	1355	S	0	-	-	15.4	35.45						
1/31	1400	S	0	-	-	19.5	35.60						
2/6	1330	S	0	-	440	23.3	35.07						
3/26 5/8	1540 1345	S S	0	-	-	22.4	37.00						
5/22	1745	S	0	-	-	29.7 28.5	37.21 37.14						
7/2	1652	S	0	_	_	30.4	38.05						
1957		D	U		_		50.05						
4/24	1509	S	0	-	-	26.0							
5/23	1515	S	0		-	30.5	35.69						
6/5	1553	S	0		***	32.3	35.88						

	STATI	ON E	90	Dept	th of	39 feet	20° 1	2.51	14	82°	001 W		
		S							F	20,	NO-		
Date	Time	or	G. 1	orcve	рН	°C	Sal.	Cu.		4	NO ₂	Car.	Pro.
		В	С.	M.					In.	Tot.	2		
1955													
6/20	1513	S	0	_	-	29.3	36.92						
		В	0	-	-	28.7	36.92						
7/0	0927	S	0	-	-	29.6	35.69						
		В	0		qua.	29.8	30.86						
7/22	1248	S	0	-	-	30.0	36.76						
		В	0	-	-	30.0	36.74						
8/4	1551	S	0	-	~	30.0	35.73						
		B	0	-	-	30.0	36.17						
8/17	1043	S	0	qua	-	30.6	36.60						
		В	0	940	-	30.0	36.62						
8/31	1532	S	0	-	-	30.5	34.78						
		B	P	-	-	30.8	34.78						
9/14	1633	S	0	-	010	29.5	34.88						
		В	0	-	-	29.3	35,81						
9/20	1016	S	0	-	-	29.9	35.79						
		В	0	-	-	29.5							
9/29	1601	S	0	-	-	29.8	36.38						
		В	0	-	-	29.7	36.33						
11/3	1530	S	0	-	-	24.5	35.81						
1956		В	0	-	~	24.8	35.81						
5/15	1304	S	0	quit	-	27.4	37.06						
		В	P	-	-	27.0	37.19						
8/9	1418	S	0	-	-	32.0	37.32						
		В	P	-	-	31.3	37.18						
	STATI	ON B	91	Dept	h of	30 feet	26° 1	3.111	V	81°	55.21 W		
1954	14.5					28.4	33.78						
10/0	1045	S B	0	_	-	28.2	33.82						
10/12	1120	S	0	-	_	27.6	35.01						
10/12	1128	B	0	-	-	27.6	35.10						
11/1	1552	S		225	-	23.2	35.10						
11/1	1055		-			19.3	34.88						
12/9	1000	S B	•	200 70	-	19.8	34.97						
1955	1112	S	-	350	-	20.0	34.52						
1/10	1142	В	_	200	-	19.7	34.99						
1/20	1017	S	-	45	-	17.2	35.35						
1/20	1011	3 B	-	45	-	17.6	35.35						
2/8	1306	S	~ D		-								
2/0	1300	В	P	- 4	-	18.0 18.1	35.21 35.17						
2/24	1708	S	0		-	19.3	35.35						
6/64	1100	В	0	-	_	17.6	35.73						
3/10	1023	S	0	-	-	20.9							
3/10	1023	В		-	-		35.84						
		Đ	0		-	20.9	35.88						

-			S							P	0	NO-		
	Date	Time	or	G. br	eve	рН	°C	Sal.	Cu.	_	4	_	Car.	Pro
	2000		В	C.	M.	F		0021	0	In.	Tot.	NO ₂	Our.	1 10,
-	6/2	1106	S	0	_		29.0	36.89						
	0 / 5	1100	В	0	_	-	28.7	36.77						
	6/20	1451	S	P	_	_	29.3	36.82						
	0/20	1101	В	0	_	_	28.5	36.94						
	6/21	1108	S	0	_	_	29.0	37.00						
	0/21	1100	В	0	_	_	28.1	37.00						
	7/6	0955	S	0	_	_	29.8	35.69						
	170	0 / 3 3	В	P	_	_	29.4	36.73						
	7/18	1025	S	0		_	30.4	35.75						
	1/10	1023	В	0	-	-	30.4	36.31						
	7/22	1307	S	0	_	-	30.0	36.24						
	1/22	1501	В	0	_	-								
	8/2	0035	S		-	-	30.5	36.42						
	0/2	0835	B	0	_	-	29.5	34.92						
	0/24	1211		0	-		29.5	35.95						
	8/24	1211	S	0	-	-	30.4	35.70						
	0/20	0021	В	0	-	-	30.8	35.84						
	8/30	0831	S	0	-	-	30.1	34.70						
	0/12	1101	В	0	••	-	29.9	35.39						
	9/12	1101	S	0	-	~	29.5	33.39						
	0 /20	0050	В	0	-	-	29.1	34.25						
	9/20	0952	S	0	•	ent.	29.5	35.16						
	0.100	/	В	0	-	-	29.2	35.55						
	9/27	1016	S	0	-	-	28.9	35.66						
			В	0	-	-	28.9	35.61						
	10/20	1410	S	0	-	-	25.2	36.58						
			В	0			25.0	36.15						
	11/1	1114	S	0	-	-	23.3	35.53						
			В	0		-	23.5	35.44						
	12/5	1511	S	0	-	-	21.8	35.93						
]	956		В	0	-	-	21.5	35.86						
	1/30	1541	S	0	-	-	18.2	35.99						
			В	0	-	-	17.2	35.99						
	2/2	1541	S	0	-	-	18.4	35.93						
			В	P	-	-	18.1	35.96						
	5/9	0638	S	0	-	-	27.3	37.47						
			В	0	-	-	27.1	37.77						
	5/22	1327	S	0	-	-	27.8	37.06						
			В	0	-	-	27.4	37.05						
	8/9	1455	S	-	0.2	-	31.7	37.27						
	957 1/10	2/25	В	-	0.5	-	31.3	37.43						
	1/10	1659	S	0	-	tod	21.0							
	3/28	0040	В	0	-		19.5	25 2/						
	3/28	0949	S	0	-	-	22.0	35.36						
			В	P	-	-	21.9	35.32						

	STATIO	ON E	92	Dept	th of	22 feet	26° 1	3' N		81°	51.9' W	T	
		S							F	0	NO ₃ -		
Date	Time	or	G. 1	oreve	рН	°C	Sal.	Cu.		4	NO	Car.	Pro.
		В	C.	M.					In.	Tot.	2_		
1954	0022		0			20 6							
3/3	0933	S	0	-	-	30.6	22 04						
0.100	- 40 (В	0	_	_	30.7	33.04						
8/27	1406	S	-	3		31.3	34.31						
20.1/	2.420	В	0	-	_	30.2	34.23						
10/6	1429	S	P	-	-	28.4	22 60						
10/12	1112	В	0		_	28.2	33.69 34.56						
10/12	1112	S	- D	5	•	27.4	34.49						
10/25	1112	В	P	250	-	27.0	34.16						
10/25	1112	S B	n D		_	23.6	34.27						
11/10	1112	S	P 0	-	6-0	24.0	34.27						
11/18 1955	1443	3	0		-	24.0	37.61						
6/20	1435	S	0	-	-	29.1	37.05						
		В	0	-	-	28.8	37.12						
9/20	0936	S	0		-	29.1	34.99						
		В	0	-	-	29.2	35.34						
11/30	1507	S	0	-	**	21.3	35.59						
1956		В	0	-	-	21.2	35.59						
5/24	0951	S	0	•	-	27.7	37.21						
		В	0	-	-	27.8	37.52						
6/22	0918	S	0	-	_	28.5	37.08						
		В	0	-	_	28.2	37.17						
7/30	1438	S	0	-	_	30.1	38.00						
		В	0	-	-	30.1	37.77						
9/6	1003	S	0	-	eef.	29.3	37.20						
1957		В	0	-	~	29.0	37.20						
3/28	1042	S	P		_	22.5	34.92						
		В	0	-	~	22.4	34.80						
5/10	1245	S	P	-	-	25.0	35.81						
		В	_0	_	_	25.1	35.84						
	STATIO	ON F	3 93	Dept	h of	10 feet	26° 1	31 N		81°	49.6' W	Ī	
1954												_	
8/16	1306	S	P	-	***	31.7	33.55						
10/6	1420	В	P	700	-	31.2	33.91						
10/6 10/12	1420 1052	S S	000	700	-	28.5 27.2	33.31 33.89						
10/12	1150	S	_	1 675	-	24.1	34.07						
11/1	1522	S	-	125	-	23.1	34.02						
12/9	1030	S	0		-	18.5	34.04						
1955	1030	3	U	_	_	10.5	J1. U1						
1/10	1116	S	-	25	_	20.3	34.97						
1957	1000		- min			25.0	25 52						
5/10	1039	S B	P 0	-	010	25.0 25.1	35.52 35.45						
5/10	1301	S	0	_		25.0	34.96						
,		M		_	**	25.1	35.82						
		В	0		-	25.1	35.54						

STATION B 9	4 Depth of 45	feet 26° 071	N 82° C	5.51 W

-			S							P	٥.	NO ₃ -		
	Date	Time	or	G. b	reve	рН	°C	Sal.	Cu.		4	NO	Car.	Pro.
			В	C.	M.	*				In.	Tot.	2		
	1954													
	10/25	1442	S	400	250	dea	25.0							
			В	P	-	-	24.9	35.41						
	12/9	1427	S	and	200	-	20.7	35.68						
	1955		В	-	25		20.6	35.62						
	1/10	1530	S		550		20.4	35.59						
			В		10	_	20.0	35.68						
	2/23	1134	S	0	-	8.0	18.5	36.15	0.50					
	6/20	1314	S	0	-		29.8	36.60						
			В	0	-	-	29.1	36.78						
	6/23	1407	S	0	_	-	29.6	37.10	0.10					
			В	0	**	-	29.1	37.03	0.45					
	7/6	1358	S	0		ma	30.0	36.99	0.40					
	.,,		В	0	-		29.7	36.92	0.31					
	8/4	1618	S	0	_	-	30.6	36.71	0.18					
	0/1	1010	В	0	_	_	29.4	37.54	0.22					
	9/20	1436	S	0			29.5	36.24	0.07		0.3	1.4	7.2	2.3
	7/20	1430	В		-	-				_			1.4	۵. ۵
	10/21	1150	S	0	-	-	29.4	36.20	0.13		0.2	0.6		
	10/21	1150		0	***	-	25.5	36.26						
	12 /20	1.42.2	В	0	000	0 1	25.6	36.15	0 00		0 7		^ B	0 4
	12/20	1423	S	P	600	8.1	20.0	36.23	0.08	-	0.1	-	0.7	0.4
	1956		В	0	-	8.2	20.5	36.40	0.36	0.2		-	4.8	
	3/13	1405	S	0	-	8.0	23.1	36.08	0.07	0.2	0.6	-	0.9	0.1
			В	0	-	8.1	22.8	36.09	0.05	0.3	0.9		••	1.5
	5/15	1335	S	0	the .	8.1	27.8	37.16	0.03	0.6	-	0.0	0.3	0.0
			В	0	_	8.1	27.0	37.06	0.10	0.0	0.1	1.8	1.1	0.0
	6/6	1112	S	0		8.3	27.9	36.97	0.03	-	0.2	0.0	1.4	0.0
			В	0		8.3	27.9	36.92	0.03	0.1	0.2	0.0	0.8	
	6/25	1230	S	0	_	8.0	29.7	37.09	0.21					
			В	0	_	8.1	29.5	37.11	0.11					
	7/12	1031	S	0	-	8.3	29.2	37.13	0.12	0.1	0.1	0.9	1.4	0.0
	·		В	0	-	8.3	29.0	37.10	0.01	0.0	1.1	0.0	0.7	0.2
	9/14	1120	S	0		8.3	28.5	36.94	0.08	60	0.1	0.4	0.7	0.2
	//		В	0		8.3	27.5	36.88	0.04		0.2	0.8	0.6	0.1
	10/29	1151	S	0		8.2	25.0	36.47	0.08	~	0.1	0.0	0.2	0.2
	10/4/	1101	В	0	-	8.2	25.2	36.64	0.08		0.3	0.0	3.9	0.1
	11/19	1422	S	0	_	8.1	23.5	36.79	0.06	0.2	0.2	1.8	0.1	0.3
	/-/	1100	В	0	-	8. 1	23.5	36.88	0.01	-	0.2	0.2	4.1	0.2
	12/10	1054	S	P	_	O. 1	20.3	36.93	0.06	_	0.1	1.0	0.3	0.3
		1037	В	P			20.5	36.80	0.06	0.0	1.5	1.0	0.6	0.4
	1957	1314	S	P	-	***	20.6	36.63	0.03	_	0.1	1.0	0.0	0.4
	1/7	1714	B	0	**		20.5	36.53	0.03	**	0.1			
	2/7	1436	S	0		8.3	22.0	36.25	0.46	_	1.0	-	1.2	0.6
	4/1	1130	В	0		8.3	21.8	36.41	0.66		0.5	0.1	1.6	0.6
			D	U	0.00	0.0	41.0	JU. TI	0.00	V . J	0.0	U . I	1.0	V. U

	STATIC	ON C	1	Dep	th of	35 feet	26°0	7' N	8	1°58.5	51 W		
Date	Time	S or B	G.	breve M.	рН	°C	Sal.	Cu.	In.	Tot.	NO- 3 NO- 2	Car.	Pro.
1954						0.0.1	0.4.00						
10/12	1633	S	0	₩.	-	28.1	34.88						
10/25	1.410	В	P	2	-	27.7 24.8	34.99 35.07						
10/25	1410	S B	C	<u>_</u>	-	24.5	35.01						
12/9	1352	S	-	70	_	20.3	35.28						
14/9	1332	В	_	150	P9	20.2	35.28						
1955		1.7		130									
1/10	1500	S	•	350	9449	20.0	35.25						
-,		В	948	10	9=4	19.9	35.39						
2/9	1701	S	P	•	***	18.8	35.52						
		В	0	**	-	18.1							
2/10	1650	S	0	•	-	21.8	36.06						
		В	0	•	-	21.0	35.97						
2/23	1201	S	0	-	-	19.1	35.61						
		В	0	-	-	17.9	35.88						
4/21	1614	S	0	946	8.0	26.1	36.45						
	10.40	В	0	-	8.1	25.4	36.42	0.09					
6/20	1348	S	0	-	_	30.0	36.92						
7.1/	0053	В	0	•	-	29.1	37,07						
7/6	0952	S B	0		_	29.5 29.4	36.95 36.87						
7/22	1342	S	0	-	_	30.0	36.89						
1/22	1346	В	0	-		30.5	36.92						
8/4	1644	S	0	946	_	•	35.35						
0/1	-011	В	0	-	ent	-	36.06						
8/31	1552	S	0	***	_	30.5	34.70						
		В	0	•	-	30.8	34.69						
9/14	1657	S	0	nut.	**	29.2	34.02						
		В	0	••	-	29.3	35.44						
9/20	1511	S	0	100	-	29.5	36.20						
		В	0	-	-	29.5	36.06						
9/29	1622	S	0	₩.	8.0	29.8	35.93	0.12	0.4		2.6	1.2	
10/01	1000	В	0	949		29.7	36.06	-	_	0.6	2.6	0.8	0.5
10/21	1220	S	0	—	-	25.2	36.09						
11/2	1554	В	0		7 0	25.0	36.00	0.03		0.2	2 2	0 0	2.1
11/3	1554	S B	0	940	7.8 7.8	24.5 24.6	35.68 35.81			0.3	J, 4	9.0 6.4	
12/20	1447	S	0 P		-	20.0	36. 23	0.07	-	-	-	0.4	1.1
12/20	1771	В	P		_	20.0	36.23						
1956		,,				20,0	50, 25						
5/15	1405	S	0	-	-	27.6	37.16						
•		В	0		-	27.4	37.33						

	Date	Time	S or B	G.	breve M.	рН	°C	Sal.	Cu.	In.	Tot.	NQ- NO 2	Car.	Pro.
	6/6	1043	S	0	MB	8.3	28.3	37.05	0.08	0.2	0.3	0.0	-	0.0
			B	0	100	8.3	28.0	37.02	0.00	0.1	0.1	0.5	1.1	0.0
	6/25	1154	S	0	PHE	-	30.0	37.30						
			В	0	+4	rell	29.0	37.34						
	7/12	1002	S	0	pull	200	29.2	37.58						
			В	0	-	mil	29.0	37.01						
	9/14	1149	S	P	-	-	28.2	36.90						
			В	0	-	rel	28.5	36.82						
	10/29	1107	S	0	-	M	25.2	36.45						
			В	0	mil	•	25.0	36.40						
	11/19	1446	S	P	-	P4	23.0	37.11						
			В	0	***	me	23.0	36.88						
	12/10	1027	S	P	H4	140	20.1	36.80						
			В	P	10	-	20.2	36.82						
	1957													
	1/7	1246	S	P	ped	**	20.2	36.71						
			В	P	**	-	20.0	36.62						
	2/7	1500	S	0	•	profi	22.0	36.15						
			В	0	649	848	21.8	36.25						
		STATIO	N C	2	Dept	h of 2	27 feet	26 °08	3.2' N	8	1°53'	W		
1	1954													
	5/7	1040	S	0	**	848	27.8	34.67						
			В	0	ped	***	27.2	34.92						
	8/3	1315	S	0	***	**	31.2	33.12						
			В	0	m	**	30.9	33.46						
	10/6	1612	S	**	1	PME	28.4	33.12						
			В	-	450	**	28.3	34.04						
	10/12	1203	S	-	13	***	27.7	34. 40						
	- 4		B	946	13	100	27.6	34.34						
	10/25	1140	S	-	325	-	23.9	34. 52						
			В	-	375	-	23.9	34. 45						
	11/18	1440	S	0	144	84	648	34.61						
			В	0	***	**	***	34.83						
	12/9	1125	S	-	45	649	19.5	34.70						
			В	-	10	₩	19.3	34.74						
	1955	1000						0						
	1/10	1203	S		85	-	20.0	35.21						
			В	-	10	•	19.7	35.28						

D - 4		S		2	. 17	°C	C - 1	C		PO 4	NO-	C	Des
Date	Time	or B	C.	breve M.	рH	C	Sal.	Cu.	Īn.	Tot.	NO 2	Car.	Pro.
1/26	1043	S	~	95	-	17.4	35.26						
-,		В		65	-	17.5	35.32						
2/8	1333	S	-	250	948	18.1	35.17						
		В	040	75	-	18.2	35, 23						
2/24	1640	S	0	**	948	19.3	35.48	0.04					
		В	0	One	pm	18.0	35.62	0.06					
3/10	1045	S	0	-	***	21.5	35.84						
		В	0	~	•	21.3	35.84						
3/16	1406	S	0	-	948	23.9	35.75						
		В	0	-	•	23.7	35.82						
3/31	1123	S	0	-	-	21.3	36.29						
		В	0	**	-	21.1	36.18						
4/5	1303	S	0	-	949	22.6	36.29						
		В	0	-	-	22.2	36.18						
4/14	1236	S	0	-	7.9	24.5	36.20	0.02					
		В	0	•	8.0	24.6	36.06	0.19					
4/20	1115	S	0	₩	8.0	25.3	36.18	0.28					
		В	0	-	8.1	25.0	36.18	0.08					
6/21	1138	S	0	940	8.0	29.1	37.19	0.30					
		В	0	000	8.1	28.5	37.21	0.00					
7/6	0819	S	0	•	7.9	29.0	36.24	0.24					
		В	0	949	7.9	29.1	36.23						
7/18	1000	S	0	249	8.0	30.3	35.75						
		В	0	-	8.0	30.4	36.11	0.05					
7/22	1329	S	0	-	8.3	30.0	35.84	0.05					
		В	0	•	8.3	30.0	35.44						
8/2	0809	S	0	-	7.9	29.0	35.32						
,		В	0	•	7.9	29.4	35.22						
8/17	1724	S	0	00	949	30.6	36.15						
- 1		В	0	-	-	30.0	36.05						
8/24	1129	S	0	-	-	30.2	35.57						
		В	P	-	-	30.4	35.48						
9/12	1027	S	0	-	-	29.3	32.43		-	0.1			
0./22	0073	В	0	***	-	29.2	34.83	-					2 /
9/20	0911	S	0	-		29.7	35. 46					1.1	
0./2=	0050	В	0	***		29.7	35. 41		0.5			5.9	2.5
9/27	0950	S	0	-	8.0	29.0	35.34		0.3			1.6	1.3
10/20	1245	В	0	-	8.0	28.9	35. 46		0.5	0.5	***	0.3	0.7
10/20	1345	S	0	••	-	24.7	35.93						
		В	0	-	-	24.6	35.97	0.03					

ŀ			S							F	PO	NO-		
	Date	Time	or	G. F	oreve	рН	°C	Sal.	Cu.		4	3	Car.	Pro.
	200	2 22.10	В	C.	M.	F				In.	Tot.	NO 2	•	
	11/1	1044	S	0	-	8. 4	23.8	35.35	0.21					
	/-		В	0	en	8.5	23.9	35.39		-	-	•	•	5.0
	12/5	1443	S	0		8.0	22.0	35.68	0.15					
			В	0	en .	8.1	21.7	35.86	0.10					
	12/20	1506	S	P	-	8.1	20.0	35.79	0.23	0.2	0.2	-	0.8	
			В	0	-	8.2	19.5	35.70	0.23	-	0.1	-	0.7	
	1956													
	1/30	1516	S	0	-	7.9	18.1	35.83	0.07					
			В	0	-	7.9	17.4	35.91	0.04					
	2/2	1601	S	0	-	-	18.4	35.95		-	0.6	_	0.0	1.2
			В	0	-	-	18.3	35.92	0.02	0.2	0.2	-	0.8	0.2
	3/5	1000	S	0	-	8.1	21.5	36.13	0.05	0.9	1.0	-	0.9	0.7
			В	0	-	8.2	21.2	36.16	0.15	0.0	-		0.0	
	4/10	0730	S	0	-	8.0	22.3	36.81	0.09	-	-	040	2.3	
			В	0	-	8.1	22.3	36.74	0.10	0.3	0.5	-	0.0	0.4
	5/9	0611	S	0	-	8.2	27.5	37.52	0.14	0.1		7.9	3, 2	0.1
			В	0	-	8.2	27.0	-	0.05	0.0	0.2	0.2	1.7	0.0
	6/6	1017	S	0	-	8.3	28.4	37.25		0.2	0.2		3.3	0.0
			В	0	-	8.3	28.0	37.31		0.1	2.3		1.5	0.0
	7/12	0935	S	0	-	8.3	29.3	37.40		0.1	0.6		0.9	0.0
			В	0	_	8.3	29.4	37.32		0.3	-	0.2	0.9	0.0
	9/4	1221	S	0	-	8.2	30.9	37.27		0.2	0.3		1.2	0.0
			В	0	-	8.2	31.4	36.56	0.06	0.3	0.9		1.3	0.1
	9/14	1210	S	0	-	8.2	28.4	37.06	0.03	0.3	1.6		0.6	0.1
			B	0	-	8.3	28.4	37.50	0.04	-	0.4		1.2	0.2
	10/29	1039	S	0	-	8.3	24.9	35, 90		-	0.3		0.8	0.5
			В	0	-	8.3	24.9	36.03		0.4	0.8		1.5	0.4
	11/19	1506	S	0	-	8.1	22.5	36.49		-	0.1		0.7	0.0
			В	0	-	8.2	22.9	36.51		0.2	0.3		1.1	0.5
	12/10	0957	S	P	-	8.2	17.8	36.64		-	0.4		0.9	0.1
			M	P	-	8.1	20.0	36.73		0.4	1.4		1.2	0.5
			В	P	-	8. 1	20.0	36.65	0.00	0.4	0.4	0.0	1.0	0.4
	1957													
	1/7	1219	S	P	-	-	20.0	36.37			0.3			
			M	P	-	-	19.7	36.26			0.9			
	2./=	1510	В	P	-		19.7	36.37			0.1	0 5	1 4	0 7
	2/7	1518	S	0		8.1	22.0	36.03			0.9		1.4	0.7
			M	0	-		22.1	36.47			1.1 0.8		1.0	1.5
	2/20	0022	В	0	-		22.0	36.21			0.8		1.6 1.8	0.5
	3/28	0922	S	P	este		22.4	35. 36 35. 36			0.6		1.8	0. 7
			M	P	-	-	22.4	35. 36		0.2	0.5		0.9	0.6
			В	0	-	8. 1	22.3	33.41	0.10		0.5	1. 4	0.7	0.0

		S								PO	NO⊷		
Date	Time	or	G.	breve	pН	°C	Sal.	Cu.		4	3	Car.	Pro.
		В	C.	M.					In.	Tot.	NO2		
4/29	1025	S	0		8.1	25.0	35.70	0.60					
4/49	1025	M	0	— ⊷	8. 1	24.8	35.74						
		В	0	_	8. 1	25.0	35.81						
	STATIC					19 feet	26°07		8	31°49.1	ı w		
1954	DIATE	714 C		Бері	.11 01	171000	20 01		_				
10/6	1522	S	_	45	-	28.7	31.65						
11/18		S	0	-	640	23.0	34.53						
1956	1311		0				• 1, 00						
5/24	1017	S	0	***	***	27.7	37.09						
5/41	1011	В	0	-		27.6	37.03						
6/6	0958	S	0	9-0	•	28.8	37.57						
0,0	0,50	В	0	040		28.7	37.48						
6/22	0946	S	0	•••	-	29.4	37.79						
0,22	0 / 10	В	0	-		29.0	37.72						
1957		2				-/• 0	0111						
3/28	1104	S	0	•	•	22.5	34,82						
0,10		В	0	**	•	22.5	34.75						
4/29	1011	S	P	948	**	25.2	35,68						
2/-/	-0	В	P	ton.	646	24.8	35.54						
5/10	1010	S	0	•	-	25.0	35.45						
		В	0		•	25.0	35.33						
5/22	1020	S	0	**	040	30.0	35.88						
•, ==		В	0	**	040	29.4	35.94						
	STATION C 4				Depth of 6 feet			91 N	8	31°47.5	¹ W		
1954			_						-				
3/18	1600	S	P	**	44	21.5	29.65						
10/15	0940	S	0		-	27.8	25.25						
		B	0		•	27.4	26.27						
10/28	1030	S	0	_	-	25.4	28.51						
1955													
2/4	0910	S	0	**	-	19.0	30.72						
1956													
2/13	1608	S	0	**	-	22.0	37.12						
10/18		S	0		040	25.0	17.01						
	STATIC)N C	5	Dept	h of	8 feet	26°05.	91 N	8	31°47.7	w .		
1954									_				
3/7	1340	S	P	ėm.		28.3	34.54						
3/18	1550	S	P	-	-	20.9	33.39						
4/28	1740	S	P	_	•••	28.2	33.22						
7/12	0900	S	P	0.0	-	30.2	32.83						
8/3	1517	S	P	-	**	32.4	31.53						
8/16	1630	S	P	•	-	30.3	32.31						

Date	Time	S	G.	breve	На	°C	Sal.	Cu.		PO 4	NO-	Car.	Pro.
Date		В	C.	M.	1 -		•		In.	Tot.	NO ₂		·
9/16	1018	S	0		-	28.9	27.81			-			
10/12	1320	S	-	450	-	27.7	33.30						
10/15	1105	S	0	_	-	27.3	31.29						
10/28	1110	S	0	•	₩.	24.8	33.77						
11/8	1540	S	0	-	→	20.9	33.78						
11/18	1533	S	0	-	-	23.0	34, 43						
12/31	1150	S	P	-	-	20.6	34.02						
1955													
1/8	1600	S	0	-	***	20.5	35.05						
2/4	0845	S	0	₩.	₩.	17.5	34.88						
2/24	1015	S	0		-	22.5	34.34						
5/4	1223	S	0	-		26.0	36.74						
5/12	1105	S	0		848	28.5	37.00						
5/18	1330	S	0	-	₩	29.6							
5/26	1115	S	0	-	-	30.0	37.20						
6/2	1500	S	0	-	•	29.5	37.44						
6/7	1341	S	0	-	-	28.8	37.12						
6/16	1146	S	0	-	-	28.2	36.55						
6/22	1345	S	0	-		29.5	36.71						
7/13	1423	S	0	-	-	31.0	17.02						
7/16	1603	S	0	-	-	29.5	33.63						
7/19	1041	S	0	**	849	31.0	35.59						
7/25	1025	S	0	₩.	-	30.5	22.32						
7/27	1727	S	0	-	₩.	31.0	29.25						
		В	0	-		30.9							
8/1	1120	S	0	ent)	~	30.0	34.18						
8/4	1410	S	0	-	-	29.4	34.65						
8/12	1330	S	0	•	**	31.1	27.41						
8/18	1015	S	0	₩.	**	30.8	34.78						
8/26	1535	S	0	-	-	31.4	17.90						
8/31	1358	S	0	→	***	31.5	32.86						
9/7	1328	S	0	-	₩.	29.0	33.87						
9/16	1027	S	0	-	-	29.8							
9/22	1632	S	0	-	-	31.0	32.18						
10/4	1030	S	0	**	₩	29.4	33.33						
10/17	1359	S	0	•	-	27.7	35.70						
		В	0	-	_	28.6	35.73						
10/19	1100	S	0	₩	-	24.4	33.66						
10/21	1320	S	0	100	_	24.0	35,73						
10/26	1430	S	0	***	***	25.6	34.13						
11/8	1330	S	0	~	-	23.0	34.66						
11/14	1521	S	0	-	100	23.4	34.86						

		S								PO	NO⊷		
Date	Time	or	C.	breve	пН	°C	Sal.	Cu.		4	3	Car	Pro.
Date	Time	В	C.		PII	O	D til.	Ou.	In.	Tot.	NO	Oar.	110.
											4		
11/18	1034	S	0	•	•	24.5	33,68						
11/29	1148	S	0	040	-	22.2	35.59						
12/13	1540	S	0	-	-	19.7	35.17						
12/14	1358	S	0	040	-	-	35.34						
12/20	0940	S	0	049	-	19.0	31.40						
12/28	1330	S	0	-	040	19.9	35, 50						
1956													
1/4	1000	S	0	***	-	18.0	35.66						
1/10	1601	S	0	=	0-0	15.1	35.48						
1/12	1000	S	0	-	_	14.1	35.30						
		В	0	040	ten	14.5	35.41						
1/17	1215	S	0	040		13.5	35.03						
1/24	0940	S	0	-	0-40	18.0	35.46						
2/1	0920	S	0	-	thed	15.5	35.23						
2/13	1035	S	0	•	040	20.0	35.82						
2/23	1547	S	0	•	•••	21.8	36.04						
		B	0	040	040	21.7	36.03						
4/3	1338	S	0	-	-	23.6	37.14						
		В	0	•	040	23.9	37.19						
5/8	0932	S	0	***	040	27.5	37.74						
5/15	1457	S	0	-	-	29.2	37.85						
10/18	0945	S	0	040	040	25.0	34.88						
1957													
3/28	1130	S	0	-	040	22.5	34.73						
		В	0		040	22.6	34, 57						
4/24	1540	S	P	-	-	26.5							
4/25	•••	S	0	0.00	040	27.5	34.38						
5/2	1401	S	0	ted	-	27.5	35.24						
6/19	1320	S	0	•	•	30.5	36.01						
	STATIO	NC	6	Deptl	of 6	feet	26°04.	5' N	-	81°47' W			
1954													
12/31	0855	S	-	1300	-	21.0	34, 20						
1955													
4/29	0900	S	0	-	to d	26.0	36.10						
9/6	1605	S	0	040	040	30.3							
		В	0	000	-	30.8	28.22						
10/17	0938	S	0	***	••	25.0	30.48						
11/16	1506	S	0	•	••	25.0	34.30						
11/17	1457	S	0	940	-	25.0	34.17						
12/14	1325	S	0	-	-	21.5	27.79						
12/28	1318	S	0		040	20.5	33.73						

Date	Time	S or B	G.	breve M.	рН	°C	Sal.	Cu.	In.	PO ₄ Tot.	NO _∞ 3 NO ₂	Car.	Pro.
1956													
1/12	1018	S	0	-	₩.	13.4	35.39						
-,		В	0	•	-	13.9	35.68						
3/1	1124	S	0	-	-	18.7	36.77						
		В	0	-	-	18.8	36.72						
3/6	1510	S	0	040	-	25.6	36.77						
		В	0	•••	—	25.5	36.79						
4/10	1029	S	0	-	-	21.5	38.02						
		В	0	_	-	21.7	37.93						
12/11 1957	1500	S	0	-	-	23.8	36.62						
4/25	1445	S	0	_	-	27.6	35.02						
5/2	1352	S	0	010	-	28.1	35.12						
	STATIC	ON C	7	Dept	h of	18 feet	26°05.	8' N		81°48.7	W		
1954			_										
10/6	1535	S	048	125	-	28.6	25.73						
10/12	1301	S	-	700	-	27.3	33.55						
10/25	1220	S	-	950	-	23.6	33.55						
11/18	1700	S	0	-	-	23.0							
1955													
8/18	1040	S	0	-	-	30.6	34.27						
		В	0	-	-	30.6	35.10						
8/22	0907	S	0	-	PHS	30.6	30.64						
- 1		В	0	-	-	30.8	33.91						
8/31	1644	S	0	-	_	31.3	31.87						
0.17	0050	В	0	_	-	30.9	35.97						
9/6	0950	S	0	-	0-0	30.2	24.60						
0/11/	1	В	0	-	mak	30.3	34.13						
9/14	1747	S	0	-	-	29.5	18.80						
10/4	0000	В	0	***	***	29.0	35.37						
10/4	0829	S	0	-	-	28.0	27.59						
10/27	1726	B S	0	•	-	28.9 25.3	35.05						
10/27	1736	В	0	_	_		34.83 35.17						
12/21	0813	S	0	_	-	24.8 19.0	35.17						
16/61	0013	В	0	_		18.9	35.34						
1956		Ъ	0	_	-	10,7	JJ. J4						
6/6	0948	S	0	840	_	28.8	37.49						
0,0	0/10	В	0	_	90	28.8	37.34						
6/22	1000	S	0	-	an .	29.4	37.68						
0,00	1000	В	0		_	28.8	37.54						
			U	_		10.0	51.51						

		S				9.0	C - 1	C		PO ₄	NO-3	Car.	Date
Date	Time	or B	G. I	M.	pН	°C	Sal.	Cu.	In.	Tot.	NO ₂	Car.	Pro
7/12	0907	S	0	-		29.4	36.87					_	
		В	0	•	unt	29.6	37.56						
7/19	1420	S	0	₩.	₩.	31.0	38.04						
		В	0	-	-	31.1	38.14						
11/20	1037	S	0	200	-	22.4	36.29						
		B	0	₩	800	22.5	36.29						
12/6	1630	S	0	-	-	19.1	36.42						
		В	0	-	-	19.0	36.28						
1957		~				21.2	25 12						
3/14	1003	S	0	-		21.2	35.12						
		В	0		C00	20.5	35.16						
3/28	1116	S	0	-	-	22.6	34.67						
= /20	1005	В	0	-	•••	22.6	34.93						
5/10	1007	S	0			25.0	35.38						
. 17	1.22/	В	0	500	14	25.0	35.34						
6/6	1326	S	P	••	-	30.7	35.65 35.90						
(/2/	0000	В	P	0-0	-	30.1 29.9	36.42						
6/26	0900	S B	0			29. 9	36.42						
	STATIO					31 feet	26°05,	21 N		81°54.5	51 W		
1955	STATIO	NC		Dept	.11 01	31 1661	20 05.	2 1	-	01 34.			
2/8	1423	S	-	250	-	18.2	35.44						
-,-		В	-	95	-	18.2	35.43						
7/22	1414	S	0		-	30.0	36.45						
		В	0	-	-	31.1	36.35						
8/4	1659	S	0	₩	-	30.0	34.88						
		В	0	***	040	30.0	35.84						
8/18	1625	S	0	₩	010	30.0	35.64						
		В	0	**	-	30.0	35.75						
8/31	1610	S	0	₩.	***	30.3	34.42						
		В	0	940	000	30.2	34.87						
9/14	1723	S	0	010	000	29.2	34.47						
		В	0	₩	200	29.2	35.46						
9/29	1639	S	0	-	•	29.8	35.53						
		В	0	₩	-	29.8	35.64						
10/21	1242	S	0	200	₩	24.8	36.26						
		В	0	-	₩	24.8	36.17						
11/3	1609	S	0	9000		24.1	35.53						
		В	0	940	₩	24.1	35.53						
1956	1.40.4	C	T)			20.0	27 11						
5/15	1424	S	P	-	200	28.0	37.11						
		В	0	000	-	28.0	37.23						

	_													 	
-			S								PQ	1	NO⊷ 3		
	Date	Time	or		breve	рН	°C	Sal.	Cu.				NQ	Car.	Pro.
			В	C.	M.					In.		Tot.	2		
_	8/9	1044	S	Þ	048	949	31.0	37.71							
	-,,		10	0	•	949	31.0	38.05							
			20	0	**	***	31.0	37.89							
			В	0	••	***	31.0	37.61							
1	957														
	4/29	1104	S	0	***	040	25.3	35.62							
			В	0	948	***	25.2	35.79							
		STATIO	ON C	9	Dept	h of	20 feet	26°05.	2' N		81°	49.6	W		
1	954		_	_											
	3/18	1535	S	P	***	949	19.8	33.80							
	5/7	1055	S	P	048	***	27.6	34. 47							
	8/3	0908	S B	0	8-6	**	31.3	22 00							
	0/16	1220	S	0	8	948	30.9 31.1	32.88 33.77							
	8/16	1228	В	-		**	30.7	33.71							
	10/6	1550	S	_	15		28.6	30.16							
	10/6	1990	В	-	225		28.3	33.06							
	10/12	1345	S	_	5	₩	27.7	33.75							
	10,10	1313	В	_	18	**	27.7	33.78							
	10/25	1248	S	_	350	-	23.6	33.78							
	-0,-5		В	_	55	949	23.6	33.86							
	11/18	1415	S	_	_	***	24.0	34.67							
	·		В	-		_	25.0	34.60							
	12/9	1230	S	-	150	**	18.3	34.09							
			В	-	150	040	18.7	34.09							
	12/31	1125	S	-	55	**	20.1	34.36							
			В	-	13	949	18.6	34.69							
1	955														
	1/10	1234	S	-	85	**	20.3	35.14							
	2 /2 /	1111	В	-	250	**	20.1	35.14							
	1/26	1109	S	-	250	240	17.3	34.79							
	2/2	1.400	В	_	45	***	17.2	34.78							
	2/8	1400	S	-	100	040	18.3	34.92							
	2/24	1620	B S	_	55	**	18.4 18.8	34.92							
	4/44	1020	B	0	949	948	18.5	35.43							
	3/10	1112	S	0	-	**	21.9	35. 59							
	5/10	4446	В	0	0-0	H4	21.9	35.68							
	3/31	1149	S	0	849	94	20.8	36.22							
	0,01	/	В	0	849	949	20.7	36.13							
	4/5	1339	S	0	948	04	22.7	36.17							
			В	0	040	**	22.4	36.26							

	m.	S	6		7.7	0.0	Sal.	Cu.		PO ₄	NO=	Car	Pro.
Date	Time	or B	G. C.	M.	рН	°C	Sal.	Cu.	Īn.	Tot.	NO ₂	oar.	110.
7/18	0935	S	0	-		30.2	35.26						
1/10	0,55	В	0			30.2	35.53						
7/6	0746	S	0		•	29.3	36.23						
170	0 / 10	В	0		well	29.1	36.21						
7/22	1425	S	0	***	944	31.1	35.08						
1722	1 100	В	0	948	State Contract	31.1	35.53						
7/26	0736	S	0	040	State Contract	29.1	34.97						
1720	0,00	В	0	•		29.6	35.08						
8/2	0747	S	0	***	-	29.0	34.96						
0/-	0, -,	В	0	949	046	29.4	34.97						
8/4	1520	S	0	948	-	30.0	34.83						
0, -		В	0	949	•	30.0	36.49						
8/17	1748	S	0	948	•	30.6	35.32						
, .		В	0	948	-	30.3	35.35						
8/23	1710	S	0	-	-	31.2	33.75						
8/30	0734	S	0	946	***	30.0	33.78						
		В	0		***	30.0	34.96						
9/12	1000	S	0	-	-	29.7							
		В	0	•	***	29.2	34.52						
9/20	0846	S	0	-	946	30.0	34.76						
		В	0	•	***	30.0	34.74						
9/21	0935	S	0	-	946	29.7	34.99						
		В	0	₩.		30.2	34.41						
9/27	0924	S	0	₩.	•	29.5	35.55						
		В	0	***	mel	29.2	35.61						
9/29	1706	S	0	₩.	-	30.2	31.15						
		B	0	₩	-	29.7	35, 44						
10/6	1549	S	0	gest	₩	29.0	34.83						
		В	0	-	-	29.0	35. 34						
10/20	1323	S	0	0-0	948	24.4	36.15						
		В	0	040	***	24.6	36.13						
10/21	1305	S	0	904		24.0	35.71						
		В	0	•	-	24.4	35.71						
10/26	0756	S	0	-	₩	24. 4	35.35						
		В	0	₩.		24.0	35.44						
11/1	1020	S	0	•==	040	23.5	35.17						
	1.4.0	В	0	-	946	23.7	35.10						
11/3	1627	S	0	•=	g=4	23.8	35.17						
	1 . 1 .	В	0	-	-	24.0	35.14						
11/30	1415	S	0		944	21.3	35.59						
		В	0		(ha)	21.3	35.61						

_	D - 4 -	Т:	S	C 1		-T.I	°C	Sal.	Cu.		Pq	NO-3	C 2 7	Pro.
•	Date	Time	or B	C.	M.	рн	C	sai.	Cu.	In.	Tot.	NQ	Car.	Pro.
1	2/5	1418	S	Р	-	-	22.0	35.52						
			В	0	-	_	21.4	35.57						
1	2/20	1526	S	0			19.1	35.35						
	·		В	0	-	₩	19.3	35.35						
1	2/21	0813	S	0	•	-	19.0	35.35						
			В	0	-	-	18.9	35.34						
1	2/22	1346	S	0	-	-	19.8	34.19						
			В	0	-	-	19.4	35.37						
19	956													
	1/30	1452	S	0	←	-	18.8	35.55						
			В	0	-	-	17.7							
	2/8	1447	S	0	949	-	21.9	35.88						
			В	0	•	**	21.7	35.88						
	2/23	1534	S	0	-	-	21.9	36.05						
			В	0	-	-	21.6	36.01						
	3/1	1628	S	0	-	-	20.7	36.11						
			B	0	-	-	20.6	36.14						
	3/5	1024	S	0	-	-	21.9	36.15						
			B	0	048	040	21.7	36.22						
	3/13	0740	S	~	0.3	} -	23.9	36.16						
			В	0	919	048	24.0	36.21						
	3/21	1458	S	0	-	-	21.2	34.50						
			B	0	-	-	20.8	36.80						
	4/10	0649	S	0	-	-	22.7	37.10						
			В	0	-	-	23.0	37.35						
	5/1	0745	S	0	-	-	24.8	36.97						
			В	0	-	-	24.5	36.87						
	5/15	1442	S	0	-	***	28.6	37.96						
			В	0	-	-	28.5	37.94						
	5/22	1238	S	0	-	040	27.7	37.05						
			В	0	-	949	27.5	36.98						
	6/4	0917	S	0	-	-	28.2	37.30						
			В	0	-	040	28.2	37.16						
	6/19	0747	S	0	-	**	27.5							
			В	0	**	-	27.5							
	7/10	0804	S	0	-	-	28.9	37.66						
			В	0	**		29.0	37.50						
	7/11	1620	S	0	•	-	29.7	37.52						
			В	0	-	-	29.8	38.46						
	8/9	1020	S	0	-	000	31.5	38.24						
			В	0	-	***	31.7	28.32						

Date	Time	S	G. h	reve	рН	°C	Sal.	Cu.		PO ₄	NO-3	Car	Pro.
Date	Time	В	C.	M.	PII		our.	ou.	In.	Tot.	NQ	Car.	110.
8/21	0914	S	P	-	-	31.0	37.90						
*		В	0	set	-	31.0	38.20						
9/6	0926	S	0		-	29.0	35.79						
		В	0	₩	₩.	29.0	37.02						
9/14	1229	S	0	-	000	28.2	37.47						
		В	0	+40	•	28.4	37.57						
9/18	0855	S	0	-	sed	27.9	36.44						
		В	0		-	28.1	36.97						
10/29	1016	S	0	⇔	***	25.3	35.83						
		В	0	₩	-	25.0	35.94						
11/19	1527	S	0	948	000	22.5	36.48						
		В	0	948	946	22.5	36.36						
11/21	1304	S	0	***	-	23.3	36.04						
		В	0		010	23.1	36.01						
12/5	1140	S	0	\leftrightarrow	\leftrightarrow	19.5	36.32						
		В	0	•		19.8	36.85						
12/10	0934	S	0	orio	000	19.8	36.54						
		В	0	010	•	20.0	36.51						
1957		_					_,						
1/7	1148	S	0	-	-	20.0	36.22						
2 (2 0		В	0			19.5	36.37						
1/15	0949	S	0	_	-	20.2	36.01						
1/20	1 45 4	В	0	-		20.0	36.10						
1/28	1454	S	0		444	19.5	36.07						
1/20	1400	B S	0	-		19.0	36.17						
1/29	1600	В	P	-	040	22.0	36.33						
2/7	1339	S	0	010	000	21.7	36.37						
2/1	1337	В	0	-	948	23.0	36.14 36.55						
2/11	1039	S	0	_	(sed)	23.5	36. 40						
2/11	1057	В	0	_	_	23.6	36.40						
3/20	0745	S	0	_	_	22.6	34.67						
3/20	0115	В	0	_	948	22.5	35.03						
3/28	0859	S	0	-		22.3	34. 88						
0,20	0007	В	0	949	₩	22.4	34.98						
4/3	1058	S	P	949	***	23.6	35.08						
·		В	0	***	geng	23.1	35.08						
4/16	1500	S	0	000	***	25.0	35.37						
4/29	1001	S	0	141	₩	25.0	35.42						
		В	P	pad	-	24.8	35.66						
5/10	1436	S	0	-	-	25.3	35.53						
		В	0	949	-	25.2	34.55						
6/12	1329	S	0	PI	-	29.6	36.96						
		В	0	94	010	29.5	36.98						

		STATIO	N C	10	Dept	h of	20 feet	26°05.	21 N		81°48.	5' W		
-			S								PO	NO-3		
	Date	Time	or	G. 1	oreve	рН	°C	Sal.	Cu.		4		Car.	Pro.
			В	C.	M.	_				In.	Tot.	NO ₂		
1	955					···								
	12/14	1408	S	0	240	-	21.3	35.47						
	12/28	1336	S	0	-	-	19.3	34.99						
	956													
	2/14	1450	S	0	0=0	-	21.0	35.34						
	5/2	1640	S	0	010	0+0	26.6	37.11						
			В	0	••		26.4	37.11						
	6/5	1626	S	0	***	100	29.6	36.96						
			В	0	000	•••	29.0	36.94						
1	957													
	1/16	1652	S	0	₩	-	22.0	36.07						
			В	0		PHD	21.0	36.20						
	4/25	1630	S	P	0-0	***	27.0	3 4. 18						
	5/2	1412	S	P	-	0-0	29.2	35.27						
			В	0	-	+4	29.2	35, 43						
	5/10	0957	S	0	040	-	25.0	35. 45						
			В	0	₩	010	25.0	35.53						
	5/16	1146	S	0	0=0	010	28.5	35.22						
			В	0	040	649	27.4	35.54						
	6/6	1328	S	0	040	479	30.0	35.99						
		1000	В	0	9-9	040	29.9	35.95						
	6/19	1300	S	0	***	6+6	30.0	36.74						
		Cm + mrc	В	0	***		29.4	36.94	01.3		03046	01 777		
1	055	STATIC)N C	11	Dep	th of	8 feet	26°03	, Z' N		81°46.	8, M		
1	955 9/6	1548	S	0				32.30						
	970	1340	В	0	_	_	e4 Fr	33. 28						
1	10/7	0956	S	0	_	-	25.0	32.81						
	1/14	1455	S	0			23.5	34.95						
	11/16	1453	S	0	0-0	+4	23.7	35.04						
	11/17	1450	S	0	**	640	24.2	34.74						
	12/14	1311	S	0	-	-	22.7	33.67						
	12/28	1238	S	0	**	-	19.7	35. 25						
	956			-										
	1/12	1038	S	0	949	040	13.6	35.61						
			В	0	040		14.0	35.66						
	1/25	1529	S	0	010		18.9	35.07						
			В	0		010	18.9	35.32						
	3/1	1140	S	0	**	**	18.4	36.95						
			В	0	040	***	18.5	36.95						

		S								PO	NO-		
Date	Time	or	G. b	reve	рН	°C	Sal.	Cu.		4		Car.	Pro.
Date	1 11110	В		M.					In.	Tot.	NO ₂		
3/6	1457	S	0	-	-	25.2	36.55						
		В	0	-	•	24.8	36.50						
4/10	1009	S	0	₩	64	22.0	37.71						
		В	0	-	•	22.0	37.72						
12/11	1450	S	0	_	64	23.4	36.70						
1957													
2/20	1436	S	0	₩	-	22.9	35.95						
4/25	1452	S	0	***	010	27.8	35.08						
5/2	1342	S	0	-	-	27.5	35.36						
	STATIO	ON C	12	Dep	th of	31 feet	26°00	.6' I	1	81°52.	3 ' W		
1954													
3/22	0915	S	P	948	010	19.5	33.95						
		В	0	•	848	19.5	34.09						
5/7	1000	S	0	~	-	27.6	34, 58						
8/3	1415	S	0	-	010	31.7	32.75						
		В	0	-	qued	31.1	33.31						
10/25	1322	S	-	150		24.2	34.63						
		В	-	3	-	24.2	34.63						
12/9	1307	S	_	150	*940	20.1	34.76						
		В		25	↔	19.5	34.79						
12/31	1100	S	-	350	-	19.7	34.51						
		В	_	70	-	18.7	34.97						
1955													
2/8	1452	S		45	***	18.4	35.44						
		В	_	25	0.0	18.5	35.48						
3/31	1217	S	0	-	444	21.4	36.18						
		В	0		***	21.3	36.11						
7/6	1617	S	0	04		29.3	36.70						
		В	0	-		29.5	36.86						
7/7	1606	S	0	848	0-0	29.1	36.53						
		В	0	000	000	29.1	36.55						
8/18	1601	S	0	010	010	29.5	35.68						
·		В	0	000	-	28.9	35.66						
8/23	1635	S	0		_	31.9	35.53						
0/23	1000	В	0	•	p=0	30.9	35.53						
10/6	1526	S	0	•		29.5	35.37						
		В	0		0-0	29.0	35.34						
10/27	1707	S	0	0-0	-	25.3	35.46						
		В	0	-	***	25.0	35.46						

		S								PO ₄	NO-		
Date	Time	or	G. 1	oreve	рН	°C	Sal.	Cu.			3	Car.	Pro.
		В	C.	M_{\bullet}					In.	Tot.	NQ		
12/22	1322	S	0	-	-	19.6	35.52						
/		В	0	•	-	19.5	35.76						
1956													
2/8	1425	S	0	-	prod	21.2	36.04						
		В	0	***	-	20.5	36.05						
3/13	0810	S	P	erit	e48	23.1	36.00						
= 10	1/05	В	0	-	-	23.1	36.07						
5/2	1605	S	0	€		25.2	36.93						
6/5	1600	B S	0		***	25.3	36.93						
0/3	1000	В	0	ud 	***	28.7 28.0	37.09 36.86						
7/11	1600	S	0	_	-	29.8	38.23						
1/22	1000	В	0	_		29.8	38.32						
8/29	1544	S	P	gress.	-	31.5	37.73						
0,1,		В	_	0.		31.0	35.09						
11/20	1106	S	0	-	out	22.5	36.30						
		В	0	Simila Simila	140	22.3	36.29						
12/6	1605	S	P	₩	-	20.2	36.82						
		В	P	910	***	19.8	36.77						
1957													
1/16	1620	S	0	-	-	21.6	36.22						
		В	0	•	140	20.5	36.34						
1/29	1541	S	P	***	•	20.2	36.16						
		В	0	-	140	20.2	36.12						
2/12	1628	S	0	***	144	23.2	36.22						
- 4		В	0	-	148	23.7	36. 40						
3/7	1557	S	0	-	-	23.3	35.79						
4/29	1127	B S	0 P	_	-	21.3 25.4	35.79						
4/47	1121	В	0			25. 4	35.60 35.58						
	STATIC			Den	th of	20 feet	26°00	Q1 N	ľ	81°46.	RI W		
1954	0111110			<u> </u>		10 1000	20 00	7 1		01 10.			
8/3	1442	S	0	-	949	31.9	32.14						
·		В	0	648	₩.	31.4	32.50						
10/12	1416	S		35	***	27.8	33.51						
		В	0	ud.	and	27.6	33.66						
1955													
1/10	1300	S		350	₩	20.3	34,83						
1/26	1142	S	0	•	946	17.5	34.87						
		В	P	-	prod	17.4	34.85						

	m:	S	C 1		1.1	°C	Sal.	Cu.]	PO 4	NO⊷ 3	Car	Pro.
Date	Time	or B		M.	рн	C	Sal.	Cu.	In.	Tot.	NO 2	Car.	Fro.
1955													
2/24	1550	В	0	•••	7.9	18.6	35.37	0.14					
4/14	1345	S	0	↦	7.8	26.3	36.73	0.34					
		В	0	₩	7.9	26.4	36.62	0.03					
4/20	1221	S	0	0-0	8.0	26.4	36.64	0.13					
		B	0	•	8. l	26.1	36.65	0.26					
6/21	1228	S	0	p=0	8.1	29.3	37.00	0.10					
7/7	0928	S	0	•	8.0	29.1	36.87	0.94					
		В	0	g=4	8.0	29.1	35.57	0.23					
7/26	0805	S	0	***	***	29.9	35.01	0.18					
		В	0	040	-	29.8	35.17	0.11					
8/22	0942	S	0	•	₩.	30.8	35.05	0.17					
		B	0	•	-	30.8	35.12	0.12					
9/6	1017	S	0	-	8.2	30.1	33.48	0.09	₩	10.5			
		В	0	•	8.2	30.3	33.21	0.01	••	0.5			
9/21	1001	S	0	010	***	29.5	34.13	0.11	0.5	0.6	1.9	1.1	1.2
		В	0	***	040	30.1	35.08	0.07	0.7	1.4	3.0	1.7	1.5
10/4	0858	S	0	040	000	28.5	35.14	0.16	-	0.3			
		В	0	•	•	28.9	35.12	0.00	-	0.6			
10/26	0827	S	0	•	-	23.5	35.68	0.00	0.6	0.8	1.5	2.8	1.5
		В	0	010	ton.	24.0	35.62	0.04	040	0.5	2.0		
12/21	0840	S	0	84	7.8	19.0	35.34	0.15	•••	0.1	•	0.9	2.0
		В	0	•	7.9	19.0	35.40	0.26	0.8	1.5			
1956													
2/7	1040	S	0	946	8.0	22.5	35.82	0.03	••	-	₩	1.2	1.9
		В	0	-	8.l	22.0	35.90	-	0.2	0.5	-	1.1	
3/5	1048	S	0	•	8.0	22.4	36.23	0.05	0.5	0.5	⊶	2.9	0.7
		В	0	•	8.0	22.0	36.24	0.07	-	1.0	e40	0.2	2.6
4/10	0822	S	0	•	8.l	23.1	37.62	0.01	0.2	0.6	•	0.0	0.9
		В	0	м	8.1	23.2	37.42	0.02	0.2	0.7	-	-	1.2
5/1	0824	S	0	040	7.8	25.2	37.12	0.17	0.2	0.6	0.0	0.6	0.5
		В	0	-	7.8	25.0	37.15	0.00	0.4	0.9	0.2	2.4	0.2
6/4	0921	S	0	-	8.1	28.4	36.91	0.04	0.5	0.5	0.0	1.1	
		В	0		8.1	28.4	36.93	0.03	••	0.0	0.1	0.5	0.0
6/19	0816	S	0	••	8.1	27.7	37.31	0.07					
		В	0	040	8.1	27.7	37.22	0.05					
7/10	0832	S	0	•	8.2	29.2	38.13	0.04	**	0.7	0.2	0.7	0.1
		В	0	•	8.2	29.0	38.21	0.03	0.3	0.9	0.3	1.1	0.3
8/21	0939	S	0	•	8.3	31.0	38.36	0.06	0.2	0.2	0.8	0.4	0.2
		В	0	-	8.3	31.0	38.38	0.05	0.2	0.5	0.0	0.3	0.0

		S							I	20	NO-		
Date	Time	or	G.	breve	На	°C	Sal.	Cu.		4	3	Car.	Pro.
2 400	2 22270	В	C.		L				In.	Tot.	NO 2		
9/18	0921	S	0	-	8.1	27.7	37.05		0.4	0.8		1.7	0.1
		В	0	•	8.2	28.1	37.24		0.3	0.4		1.1	0.1
11/21	1244	S	0	•	-	23.0	35.96		0.2	0.3		1.4	0.3
		В	0		-	22.5	36.08		-	0.8		0.8	0.4
12/5	1205	S	0	-	8.3	19.0	36.36		-	0.5		1.2	3.7
		В	P	000	8.3	19.1	36.35	0.02		0.7	1.0	1.4	1.5
1957													
1/15	1012	S	P	-	8.1	20.4	36.10		-	1,1			
		В	0	em	8.1	20.1	36.15	0.03	-	1.2			
1/28	1431	S	0	e-s	8.1	21.7	36.22	-	0.3	0.7	0.1	1.5	0.0
		В	0	-	8.2	21.6	36.39	-	0.1	0.5		0.7	0.5
2/11	1106	S	0	-	8.2	23.8	36.80	0.14	0.6	1.1	0.1	1.5	0.3
		В	0	-	8.2	24.0	38, 40		1.1	-	0.7	0.8	0.6
3/20	0818	S	0	-	7.9	23.8	35.12	0.20	0.0	0.8	0.8	1.6	0.4
		В	0	ė	8.0	23.2	35.32	0.12	0.3	1.2	1.2	1.6	0.6
4/3	1128	S	0	-	8.0	23.8	35.02	0.00	0.7	0.7	0.2	1.4	0.9
		В	0	-	8.0	23.4	35.07	0.10	-	0.6	2.8	1.6	0.2
	STATIC	N C	14	Dept	h of 8	8 feet	26°01	.7' N	8	1°46' \	N		
1955													
9/6	1535	S	0	•	-	30.4	33.98						
		В	0	-	***	30.6	33.91						
10/17	1010	S	0	-	-	25.1	33.96						
11/14	1442	S	0	-	**	24.0	35.02						
11/16	1444	S	0	₩	-	24.5	34.82						
11/17	1440	S	0	-	-	24.0	35.00						
12/14	1300	S	0	-	-	22.8	35.52						
12/28	1230	S	0	-	**	19.7	35.44						
1956													
1/12	1055	S	0	-	-	14.4	35.37						
		В	0	-	-	14.8	35.39						
1/25	1820	S	0		-	18.1	35.68						
		В	0	rea .		18.2	35.70						
3/1	1155	S	0	-	-	19.5	36.50						
		В	0		-	19.4	36.50						
3/6	1445	S	0	-	-	24.4	36.47						
		В	0	000	~	24.1	36.48						
4/10	0953	S	0	-	-	22.6	37.56						
		В	0		-	22.7	37.62						
12/11	1445	S	0		-	22.2	36.53						

Date	Time	S	G	breve	пH	°C	Sal.	Cu.	F	204	NO-	Car.	Pro.
Date	111110	В	C		P				In.	Tot.	NO 2	our,	- 10.
1957													
2/12	1710	S	0	0=0		24.0	36.74						
		В	0	546	0-9	24.0	36.64						
2/20	1430	S	0	-	-	22.9	36.42						
4/25	1502	S	0	-	-	27.1	35.15						
5/2	1334	S	P	-	-	27.3	35.43						
	STATIO	NC	15	Dept	h of	3 feet	26°02	Z'N	8.	l°45.2	¹ W		
1956													
5/2	1622	S	0	••	-	28.5	36.16						
6/5	1523	S	0	-	8.0	29.6	36.73						
6/19	1415	S	0	-	-	29.5	36.62						
7/2	1415	S	0	644	8.0	29.5	38.09						
7/25	1545	S	0	-	8.0	30.3	38.06						
7/31	1405	S	0		-	32.0	36.46						
8/16	1352	S	0	6=4	-	31.5	37. 41						
8/28	1040	S	0	***	-	30.7	36.23						
9/5	1405	S	0	-	-	20.0	33.01						
9/26	1338	S S	0	-	_	30.0	21.34						
10/1 10/9	1256 1414	S	0	-	deal .	29.2	30.98						
11/21	1339	S	0	-	_	30.0 24.5	26.51 35.50						
1957	1337	5	U	_	_	24. J	33, 30	0.10					
1/11	1350	S	0	-	-	22.0	37.05	0 00					
2/4	1339	S	0	gent .	944	25.0	36.69						
5/8	1457	S	0	•	_	25.5	35.86						
5/28	1640	S	0	-	946	31.0	30.52						
	STATIO		16	Dept	h of	l6 feet	26°01		81	l°45.8	' W		
1954													
2/10	1335	S	0	₩.	-	19.5	33.75						
		В	0	Brog.	-	-	33.77						
5/7	1130	S	P	-	-	27.7	34.33						
12/31	0915	S	-	1750	-	19.6	34.23						
1955													
4/29	0907	S	0	-	044	26.0	36.10						
7/27	1649	S	0	•	-	31.5	29.96						
- 1-		В	0	0-4	-	30.5	34.25						
9/9	1526	S	0	-	946	-	34.16						
1000		В	0	949	•		34.02						
1956	1.2.4/					1	0.77						
1/12	1346	S	0	-	***	14.9	35.31						
		В	0	-	-	15.5	35.20						

			S								PO	NO-		
	Date	Time	or	G.	breve	pН	°C	Sal.	Cu.		4	NO NO	Car.	Pro.
			В	C.	M.					In.	Tot.	2		
•	1/24	1519	S	0	444	-	18.9	35.49						
	1/27	131/	В	0	444	-	19.1	35.08						
	2/7	1030	S	0	949	848	22.9	35.89						
	2,1	2000	В	0		-	22.5	35.90						
	2/23	1444	S	0	-	-	21.5	36.12						
			В	0	p=4	-	21.5	36.15						
	3/1	1212	S	0	040	-	20.0	36.35						
			В	0	-	-	20.5	36.45						
	3/6	1432	S	0	₩	-	24.3	36.42						
			В	0	•	446	24.6	36.45						
	4/10	0941	S	0	•	***	22.6	37.57						
			В	Ö	***	-	22.7	37.47						
	1957													
	4/25	1600	S	-	-	**	26.5	35.09						
	5/2	1200	S	0	-	-	27.1	35.42						
			В	0	₩	-	27.1							
	5/22	1410	S	0	-	-	30.3	28.69						
		STATIO	N C	17	Dept	h of	6 feet	26°00	.9'N		81°44.8	W		
	1955													
	9/6	1514	S	0	•	-	30.7	34, 58						
			В	0	-	-	30.6	33.64						
	10/17	1024	S	0	-		25.2	33.55						
	12/14	1156	S	0	646	-	23.1	35.43						
	12/28	1213	S	0	•	-	19.8	35.32						
	1/12	1112	c	0			14.1	25 41						
	1/12	1113	S B	0	b=0	-	14.1	35.41						
	2/23	1432	S	0	***	end	14.5 21.2	35. 45						
	4/43	1434	В	0	p48	-	21.0	36.25 36.25						
	5/2	1151	S	0	_	_	27.0	35. 48						
	12/11	1416	S	0	=	_	23.2	36.53						
		STATIO					6 feet	25°59.	91 N		81°44.6	w		
1	1955				<u> </u>			=3_3/		-				
	9/6	1501	S	0	-		30.5	30.50						
	,,,		В	0	-	-	30.8	32.09						
	10/17	1035	S	0	-	844	25.2	33.58						
	11/14	1419	S	0	-	•	24. 1	34.74						
	11/16	1421	S	0	-	-	24.4	34.91						
			В	0	-	844	24.1	34.84						
	11/17	1416	S	0	(82)	444	24.5	34.91						
			В	0	840	44	24.6	34.74						
	12/14	1150	S	0	-	-	23.0	35.08						

		S								PO	I	NO-		
Date	Time	or	G. b	reve	pН	°C	Sal.	Cu.		4	_ N	10 ⁵ 3	Car.	Pro.
		В	C.	M.					In.	То	t.	2		
12/28	1202	S	0		pek	19.6	34.88							
1956	1202	~				. , , ,								
1/12	1126	S	0		-	13.9	35.64							
-,		В	0	-	Bee	14.5	35.75							
2/23	1424	S	0	**	***	21.2	36.29							
-,		В	0	•	pol	21.0	36.48							
12/11	1412	S	0	944	844	23.2	36.62							
1957														
5/2	1144	S	0		desp.	27.3	35.55							
·	STATIC	N C	19	Dep	th of	ll feet	25°58.	. 2' N		81°45	. 41	W		
1955														
4/5	1427	S	0	•		24.4	36.09							
		В	0	-	-	24.2	36.15							
7/27	1636	S	0	**	**	30.7	33.33							
		В	0	-	-	30.5	35.12							
10/4	0910	S	0		PM .	28.5	34.00							
		В	P	pm	-	28.8	35.62							
10/17	1243	S	0	••	***	25.1	34.88							
1956														
7/25	1332	S	0	**	PRE	30.3	38.10							
7/31	1400	S	0	**	-	31.0	39.16							
8/7	1314	S	0	***		31.2	38, 20							
8/16	1342	S	0	-	-	31.5	37.98							
9/5	1358	S	0	paik	-	29.0	37.42							
9/11	1535	S	0	_	-	28.2	38.22							
9/26	1330	S	0	poli	•	28.7	32,22							
10/1	1250	S	0	148	gade	28.2	36.35							
10/9	1403	S	0	paik	-	28.5	35.72							
10/18	1553	S	0	**	940	26.0	35.61							
10/29	1408	S	0	-	ped	25.0	33.84							
1957														
1/21						19.0	36.40			03.94		717		
	STATIC	N C	20	Dep	th of	28 feet	25°58	. W		81°44	t. ('	<u></u>		
1954	1200	C	0			10 5	22 06							
2/10	1300	S	0	~	0-0	19.5	33.86							
2/22	0040	В	0	pub	=1	18.8	33.91							
3/22	0840	S	0	park .	pul	20.9	33.44							
4/20	0050	В	0	**	gank	21.0	33. 46							
4/28	0950	S	0	-	948	26.0	34. 20							
5/7	0000	В	P	148	p=1	26.3	34. 33							
5/7	0800	S	P		948	26.9	33.80							

		S								PO_4		NO-		
Date	Time	or		oreve	pН	°C	Sal.	Cu.				NO NO	Car.	Pro.
		В	C.	М.					In.	To	ot.	2		
12/31	0935	S	_	450	₩	20.3	34.23							
1955														
2/8	1607	S	-	45	***	20.0	35.01							
		В	-	20	•	20.0	34.90							
4/19	1433	S	0	•	•	26.7	37.03							
7/27	1618	S	0	-	***	31.3	29.87							
		В	0	-	***	30.7	31.73							
9/6	1422	S	0	-	ein	30.1	34.52							
		В	0	-	•	30.4	34.58							
9/22	1520	S	0		**	30.5	32.92							
		В	0	•••	-	30.5	33.17							
10/17	1053	S	0		**	26.0	34.18							
		В	0	•	-	25.6	34.85							
11/14	1402	S	0	•	-	23.6	35.00							
		В	0	••	***	23.9	34.83							
11/16	1405	S	0	-	•	23.8	35.49							
		В	0	646	64	24.0	35.05							
11/17	1401	S	0	•	**	23.9	35.09							
		В	0	-	-	24.2	35.00							
12/14	1115	S	0	and	**	20.9	36.14							
12/28	1055	S	0	844	**	19.3	35.13							
1956														
1/12	1152	S	0	See See	•	14.4	35.43							
		В	0		-	14.9	35.47							
1/31	1455	S	0		•	20.0	35.58							
2/7	1450	S	0	-	-	24.0	35.54							
2/16	15 05	S	0	•	-	22.5	35.55							
2/23	1410	S	0	948	•	20.8	36.28							
		В	0	848	-	20.6	36.20							
2/28	1547	S	0	•	**	24.0	36.41							
3/22	1405	S	0	-	**	19.6	37.09							
5/2	1415	S	0	-		27.5	36.77							
	* 123		Ü		·	= 1,5	50.11							
1957 2/19	1502	S	0			22.2	36.47							
2/1)	1500	M	0		-	22.4	37.07							
		В	0	84	***	23.0	36.37							
2/19	1600	S	P	and .	800	22.4	36.29							
-,-/	- 000	В	0		***	22.5	36.44							
2/19	1700	S	0			22.3	36.58							
,,	-,00	В	0	-		22.5	36.48							
			0											

_	Date	Time	S	G 1	reve	nН	°C	Sal.	Cu.		PO ₄	NO-	Car.	Pro.
	Date	Time	or B	C.	M.	PII	O	Du1;	•	In.	Tot.	NQ		
-	2/19	1800	S	0	-	p-a	22.4	36.50						
	,,		M	0	***	grade	22.4	36.49						
			В	0		946	22.5	36.38						
	2/19	1900	S	0	-	₩	22.3	36.58						
	•		В	0	p=0	0=0	22.5	36.49						
	2/19	2000	S	0	-	-	22.4	36.50						
			В	0	944	ord	22.5	36.57						
	2/19	2100	S	0	₩	-	22.5	36.58						
			В	0	-	64	22.7	36.58						
	2/19	2205	S	0	-	646	22.7	36.65						
			В	0	•	-	23.0	36.76						
	2/19	2300	S	0	_	-	22.5	36.67						
			В	0	948	- Quality	22.8	36.74						
	2/19	1400	S	0	***	4	22.5	36.52						
			B	0		-	22.8	37.00						
	2/20	0100	S	0	-		22.3	36.43						
			В	0	gard.	-	22.8	36.67						
	2/20	0200	S	0	-	-	22.2	36.32						
			В	0	-	0-0	22.4	36.51						
	2/20	0300	S	0	6-4	0-0	22.3	36.34						
			В	0	***	gunt	22.1	36.34						
	2/20	0400	S	0	•	-	22.2	36.34						
	- 100		В	0	-	-	22.2	36.46						
	2/20	0500	S	P	-	-	22.2	36.63						
	2 /22	0/00	В	0	_	#1	22.2	36.60						
	2/20	0600	S	0	=	-	22.2	36.43 36.71						
	2/20	0700	B S	0	944		22.2	36.51						
	2/20	0700	В	0	•	-	22.1	36.42						
	2/20	0800	S	0	640		22.2	36.42						
	2/20	0800	В	0	-	_	22.2	36.42						
	2/20	0900	S	0	_	_	22.3	36.45						
	2/20	0700	В	0	_	_	22.3	36.40						
	2/20	1000	S	0	_	-	22.5	36.51						
	4/40	1000	В	0		_	22.5	36.66						
	2/20	1100	S	0	200	~	22.6	36.47						
	2,20		В	P	pad	*	22.3	36.62						
	2/20	1200	S	0	948	6 -4	22.6	36.53						
	2,20	1200	В	0	~*	-	22.5	36.37						
	2/20	1300	S	0	-	-	22.9	36.50						
	_,		В	0		0=0	22.7	36.70						

-	Date	Time	S		breve	рН	°C	Sal.	Cu.		PO ₄	NO=3 NO	Car.	Pro.
_			В	С.	M.					In.	Tot.	2		
	2/20	1400	S	0	our	•	22.9	35. 56						
			В	0	veli	-	22.6	36.70						
	5/2	1038	S	0	-	-	~	35. 42						
	= 100	1055	В	0	-	-	27,0	35. 48						
	5/22	1355	S	0	0-0	-	30.3	36.53						
	6/11	1522	S	0			30.5	36.32	11.57		01040 /	1 717		
1	055	STATIC)N C	41	Dept	h oi	6 feet	25°58.	1, N		81°43.6	- W		
1	955	0730	C	0			22 5	24 25						
	3/11	0720	S B	0	-	-	22.5	36.35						
	5/12	1245	S	0	-		22.5	36.38						
	5/12	1245	S	0	040	-	29.7 29.6	37.34						
	5/26	1335	S	0			30.5	37.79						
	6/2	1630	S	0		_	29.5	38.55						
	6/7	1509	S	0	404	_	30.0	37.87						
	6/16	1303	S	0	₩.	₩.	29.4	37.12						
	6/22	1500	S	0	_	-	30.4	36.87						
	7/6	1320	S	0	-	dest	29.8	35.69						
	7/14	0940	S	0	•	and.	29.3	34.05						
	7/19	1350	S	0	-	-	31.0	34.22						
	7/25	1240	S	0	•••	-	31.6	30.43						
	7/29	0945	S	P	-	-	30.9	32.41						
	8/1	1255	S	0	-	→	30.5	31.17						
	8/4	1135	S	0	-	•	30.0	34.52						
	8/12	0955	S	0	See .	•	30.0	33.51						
	8/18	1355	S	0			31.7	34.60						
	8/26	1416	S	0	940	•	31.5	27.12						
	8/31	1240	S	0	-	-	30.1	31.33						
	9/13	1230	S	0	↔	2000	31.0	33.19						
	9/15	1503	S	0	24	•	31.5	34.04						
	9/22	1535	S	0	-		31.3	32.84						
			В	0	₩	ma	30.1	34.13						
	0/4	1333	S	0	•		29.5	33.78						
	0/20	1303	S	0	040	-	25.0	34.05						
	0/27	1026	S	0	-		25.0	35.53						
	1/9	1115	S	0	949	040	22.5	35.15						
	1/18	1428	S	0		0-0	24.9	34.91						
	1/29	0953	S	0	-	H	22.6	35.62						
	2/14	1115	S	0	-	-	20.4	35.17						
	2/22	1230	S	0	-		19.8	35.26						
J	2/28	1030	S	0		040	20.0	35.35						

		S								PO ₄	NO-		
Date	Time	or	G.	breve	pН	°C	Sal.	Cu.		4	NO 3	Car.	Pro.
		В	C.	M.					In.	Tot.	2		
107/													
1956	1245	C	0			10.0	25 05						
1/4	1345	S	0	5+0	***	19.0	35.95						
1/10	1458	S	0	544	9+0	15.7	35.50						
1/12	1203	S	0	-	•	14.7	35.50						
		В	0	ded .	•	15.0	35. 49						
1/17	1345	S	0	040		14.0	35.71						
1/24	1255	S	0	0+0	_	16.0	34.73						
2/1	1100	S	0		•	17.5	35.74						
2/8	1310	S	0	***	-	23.3	35.52						
2/13	1220	S	0	***	•	22.5	36.16						
2/23	1310	S	0	₩.	\rightarrow	21.5	36.23						
3/6	1250	S	0	-	-	24.4	36.68						
3/23	1015	S	0	949	≈	17.0	37.29						
4/10	1432	S	0	•	***	22.2	38.05						
5/2	1440	S	0	•	-	27.8	37.74						
11/6	1310	S	0		-	24.0	36.10						
11/20	•	S	0	***	•••	24.1	36.15						
11/21	1016	S	0	•	•	23.2	36.11						
11/28	1355	S	0	848	-	17.3	36.29						
12/5	1000	S	0	-	-	19.9	36.56						
12/10	1128	S	0	64	-	21.8	36.64						
1957													
1/11	1344	S	0	-	₩.	22.0	36.98						
1/15	1025	S	0	and	240	21.3	37.20						
2/4	1332	S	0	•	-	24.5	36.79						
2/12	1615	S	0	848	-	24.5	36.80						
2/24	1236	S	0	₩	-	21.5	36.43						
3/11	1355	S	0	***	Delta .	19.0	34, 48						
3/19	1317	S	0	949	-	23.7	35.26						
3/20	0915	S	0	148	***	25.0	35.04						
3/26	1154	S	0	↔	0+0	24.5	35.45						
4/2	1316	S	0	•	040	24.5	35.20						
4/10	1049	S	0	***	-	27.0	35.81						
4/15	1537	S	0	•••	***	26.0	34.86						
4/24	1555	S	0	pris .	•	27.0							
5/2	1152	S	0	•••	•••	27.2	35.30						
5/8	1452	S	0	•	5+6	25.5	35.82						
5/15	1315	S	0	tel	844	28.3	35.89						
5/28	1615	S	0	***	-	30.7	36.37						
6/13	1350	S	0	-	₩.	30.6	36.36						

		S								PO_{4}	NO=3		
Date	Time	or	G.	breve	pН	°C	Sal.	Cu.				Car.	Pro.
		В	C.	M.					In.	Tot.	NO 2		
1054													
1954	0025	C	0			27 0	24 70						
5/7	0925	S	0	***	•••	27.0	34.78						
10/12	1520	В	0	-	-	27.1	34.83						
10/12	1530	S	0	end	**	28.5	34.52						
1055		В	0	44	844	27.6	34.67						
1955	1 410			200		20 5	2/ 04						
1/10	1412	S	600	300	ent	20.5	36.04						
2.42	1	В	-	100	**	20.1	35.61						
2/9	1603	S	0	649	gash	19.0	35.71						
		В	0	-	000	18.4	35.71						
2/23	1319	S	0	649	8.0	20.1	36.00						
3/16	1242	S	0	-	8. 2	23.5	36.20						
		В	0		8.2	22.8	36.18						
4/21	1505	S	0	***	8.1	26.8	36.38						
		В	0	649	8.2	25.3	36.35						
6/23	1305	S	0	***	***	29.4	36.91						
		В	0	949	-	29.0	36.92						
8/23	1605	S	0	949	-	31.9	36.55		640	1.0			
		В	0	-	•	30.9	36.11	0.20	649	1.0			
10/6	1501	S	0	40	010	29.5	35.66	0.14	60	0.2			
		В	0	***	PR	29.8	35.71	0.04	-	0.1			
10/27	1643	S	0	649	**	25.5	35.79	0.16	0.6	1.0	1.3	1.3	0.7
		В	0	***	mil	25.0	35.71	0.17	0.2	0.2	1.8	0.0	0.4
12/22	1235	S	0	m	8.1	20.0	36.11	0.31	0.3	0.4	44	0.4	
		В	0	***	8.1	19.8	36.09	0.31	0.2	0.5	-	0.8	
1956													
2/8	1356	S	0	-	8.1	19.9	36.22	010	0.1	0.2	-	0.3	0.5
		В	0	949	8.1	19.9	36.22	0.04	0.7	0.8	-	1.0	0.8
3/13	0844	S	0	949	8.0	22.6	36.16	0.05	and .	-	-	1.1	1.1
		В	0	***	8.1	22.6	36.15	0.09	649	1.4	em .	0.9	2.6
5/2	1537	S	0	999	8.3	25.2	36.89	0.16	0.1	0.2	0.1	1.5	0.4
		В	0		8.4	25.0	37.02	0.07	0.3	0.6	0.2	1.0	0.3
6/5	1529	S	0	***	8.3	29.0	37.13	0.10	ed	0.0	0.0	2.1	0.0
		В	0	649	8.3	28.0	36.92	0.09	0.2	0.3	0.0	1.3	0.1
7/11	1535	S	0	-	8.2	29.8	37.98	0.07	0.2	0.2	0.2	0.8	0.1
		В	P	en.	8.3	29.8	38.12	0.08	***	0.1	0.5	1.3	0.1
8/29	1520	S	0	-		31.7	38.12	0.04	0.2	0.6		1.4	0.0
		В	0	***		31.0	37.99		0.3	0.4		1.1	0.0
11/20	1130	S	0	***		23.3	36.74		0.2	0.2		1.1	0.2
		В	0	***	8.2	23.1	36.79			0.3		0.5	0.5

Date	Time	S	G.	breve	рН	°C	Sal.	Cu.]	PO_4	NO-	Car.	Pro.
		В	C.		_				In.	Tot.	NQ		
12/4	1530	S	P			21.0	36.90	0.06	0 3	0.8	0.8	1.1	0.5
12/6	1530	В	P	_	part .	20.9	36.83				0.4	0.9	0.4
1957			•			_ 0 ,			- • -				
1/16	1543	S	0	-	8.2	21.8	36.64	0.00	•	1.0			
		M	0	-	8.2	20.7	36.42	0.03	-	0.8			
		В	0		8.2	20.5	36.42	0.09	-	0.7			
1/29	1521	S	P	~	8.1	21.1	36.35	₩.	0.6	1.4	0.2	1.0	0.5
		В	P	-	8.2	20.5	36.21	-	0.0	0.1	0.5	1.1	0.1
2/12	1601	S	P	64	8.1	22.5	36.42	0.14	0.4	0.6	0.4	0.8	0.8
		M	0	pat .	8.2	22.5	36.40	0.14	-	0.7		1.5	0.6
		В	P	948		22.5	36.59		-	0.9		1.4	0.9
	STATIO	NC	23	Dept	h of 3	33 feet	25°56	3' N	8	1°51.4	. ' W		
1954													
4/28	1035	S	0		***	26.3	34.85						
4.5		В	0	pad	-	25.6	34.99						
10/12	1503	S	0	•	040	28.1	33.93						
		В	0	p-0	84	27.5	34.11						
1955	3.0.40	0		250		20 /	25 22						
1/10	1348	S	p=0	350	park	20.6	35.32						
2/0	1514	В	-	200	-	19.9	35.32						
2/8	1514	S	_	15 10	840	18.3	35.50 35.50						
3/31	1242	B S	0	10	-	18.4	36.09						
3/31	1444	В	0	p-4		21.6	36.09						
8/18	1540	S	0	-	_	30.0	35.71						
0/10	1340	В	0	-	H	30.0	35.79						
	STATIO					24 feet	25°56	. 1 ¹ N	8	1°47.1	ı w		
1954						1 1000			_				
4/28	1012	S	0	p=0	-	26.5	34.49						
		В	0	-	•	25.7	34.72						
5/7	0820	S	P	ted.	pat	26.9	34.38						
		В	0	gest.	pel	26.8	34.38						
10/12	1442	S	-	55	-	27.8	33.04						
		В	-	175	-	27.4	33.75						
12/31	0950	S	-	750	-	19.2	34.67						
		В	-	250	946	18.4	34.45						
1955													
1/10	1323	S	-	200	040	20.7	34.88						
		В	-	250	-	20.0	34.83						
1/26	1205	S	P	-	-	17.6							
		В	0	-	-	17.7	35.43						

-	Data	Time	S	G	harro	-11	°C	C o l	Cu.		PO ₄	:	Ng-	Car	Pro.
	Date	Time	or B	C.	breve M.	рн	C	Sal.	Cu.	In.	-	rot.	NO 2	Car.	FIO.
-	2/8	1538	S	-	350	-	18.4	35.35							
	-,-		В	-	15	**	18.5	35.30							
	2/24	1530	S	0	-	***	20.1	35.43							
			В	0	-	•	19.0	35.44							
	3/10	1209	S	0	-	846	22.4	35.70							
			В	0	-	•	22.5	35.66							
	4/5	1543	S	0	-	-	23.2								
			В	0	***	346	22.3	35.99							
	6/2	1313	S	0	₩	-	29.6	37.59							
			В	0	-	849	29.4	37.52							
	6/21	1254	S	0	-	₩	29.1	37.00							
			В	0	-	-	28.5	36.92							
	7/7	1003	S	0	-	-	29.1	35.62							
			В	0	-	-	29.2	35.59							
	7/26	0832	S	0	••	-	29.5	34.65							
			В	0	•	-	30.0	35.25							
	8/18	1145	S	0	0.0	-	30.6	35.52							
			В	0	-	-	30.6	35.41							
	8/22	1006	S	0	-	049	30.9	35.01							
			В	0	***		30.9	35.44							
	9/6	1038	S	0	-	-	30.1	35.57							
	- 1		В	0	-	-	30.1	35.62							
	9/21	1024	S	0	-	-	29.9	34.81							
	10//	0004	В	0	849		29.8	32.81							
	10/4	0924	S	0	-	-	28.9	34.87							
	10/2/	0.0.40	В	0	000	-	29.0	34.34							
	10/26	0849	S	0	-		24.5	35.95							
1	054		В	0	-	•	24.1	35. 86							
1	956	1105	C	0			21 0	25 02							
	2/7	1105	S B	0	-	-	21.9	35.82 35.89							
	3 / 5	1113	S	P	_		22.0	36. 25							
	3/5	1113	В	0	_	-	21.9	36.21							
	E / 1	0.053			-	•	25.0	37.02							
	5/1	0853	S B	0	_	-	24.7	37.02							
	6/4	1003	S	0	-	_	28.4	37.16							
	0/1	1005	В	0	-	-	28.2	37.27							
	6/19	0840	S	0	=	-	27.6	37.17							
	0,2,	0010	В	0	-	-	27.5	37.12							
	7/10	0855	S	0	•	_	29.4	38.55							
	,, = 0	0000	В	0	de		29.1	38.54							
			_	9			_,								

Date	Time	S	G.	breve	рН	°C	Sal.	Cu.		PO ₄	NO-	Car.	Pro.	
		В	C.	M.					In.	Tot.	NQ			
0./21	1001		0		Sea	31.0	38.05							
8/21	1001	S B	0	-		31.0	38.10							
9/18	0944	S	0	_	_	28.0	37.04							
9/10	0744	В	0	_		28.1	37.04							
11/21	1222	S	0	_		24.0	36.18							
11/21	1666	В	0	and .	100	23.0	36.23							
12/5	1230	S	0		H4	19.9	36.57							
1675	1450	В	0		pol	19.3	36.76							
12/21	1147	S	0	ed.	put	22.8	36.61							
12/21	** * * * * * * * * * * * * * * * * * * *	В	0	**		23.0	36.61							
1957			~											
1/15	1035	S	0	000	PH .	20.3	36.17							
1/15	2000	В	0	Pine Pine	н	20.2	36.27							
1/28	1456	S	0	-	₩	21.7	36.23							
2780	- 100	В	0		100	21.0	36.22							
2/11	1129	S	0	-	80	23.6	35.20							
-/	/	В	0	240	gast	24.0	35.30							
3/20	0838	S	0	-	put	24.0	35.37							
0,20	• • • • •	В	0	**	-	23.0	35.48							
4/3	1150	S	0	-	100	23.8	35.37							
-, -		В	0	-	tes .	23.4	35.34							
	STATIO			Dept	h of	2 feet	25°56	1 N		81°39.2	' W			
1955														
3/17	0815	S	0	948	7.9	24.5	•	0.23						
4/13	1305	S	0	-	8.0	26.7	36.98	0.13						
5/18	1130	S	0	-	7.9	29.0	38.03	0.18						
7/6	1345	S	0	-	949	29.,8	28.88	0.71						
7/19	1414	S	0	***	010	30.7	29.14	0.00						
7/25	1303	S	0		800	32.2	15.44	0.64						
8/1	1203	S	0	_	per	29.9	19.38	0.79						
8/4	1055	S	0		-	30.6	7.79	0.71						
8/12	1016	S	0	-	me	31.7	27.83	0.06						
8/18	1430	S	0			30.6	33.12	0.11						
8/31	1147	S	0	10-7	8.0	31.0	21.78							
9/7	1510	S	0	***			15.12		-	1.8				
10/4	1455	S	0	-		29.5	25.34		819	0.7				
10/27	1045	S	0	-	test	26.1	31.40	0.03						
11/9	1135	S	0	6179	-	22.5	34.92	0.07						
11/18	1500	S	0	010	-	25.4								

		S				0.0	C 1		I	PO ₄	NO-3		
Date	Time	or B	C.	M.	pН	°C	Sal.	Cu.	In.	Tot.	3.7.0	Car.	Pro.
11/29	1026	S	0	-	7.8	22.3	31.46	0.34					
12/14		S	0	_	7.6	23.8	34, 99						
12/22		S	0	100	7.6	20.4		0.08	1.5	1.7	•	0.7	2.0
1956													
1/10	1511	S	0	349	8.0	15.4	35.68	0.37					
1/24	1140	S	0	1000	8.2	15.5	35.56	0.05					
2/1	1018	S	0	pri	8.2	19.0	35.81	0.03					
2/8	1230	S	0	₩	8.1	25.6	35.29	0.04	310	2.5	-	•	4. 4
2/23	1255	S	0	-	7.8	22.0	36.97	0.10					
3/6	1206	S	0	949	***	25.5	37.03	0.06	1.4	2.5	ы	b=0	3.6
3/23	0952	S	0	0+0	7.8	17.5	38.44	0.00					
4/10	1502	S	0	0-0	-	21.5	38.54	0.07	1.6	2, 4	-	2.0	4.5
5/2	1500	S	0	trets	8.2	29.4	38.63	0.00	000	***	0.1	2.2	0.3
5/8	1030	S	0	beq.	7.8	28.7	39.23	0.07					
6/6	1320	S	0	510	8.4	30.3	38.58	0.18	1.6	3.3	0.0	3.3	
7/10	1350	S	0	1-0	8.3	32.7	39.06	0.01	1.0	1.8	1.1	3.2	0.1
8/21	1450	S	0	-	8.1	31.6	39.87	0.03	1.1	1,3	1.6	949	0.3
9/18	1620	S	0	546	8.0	28.4	33.98	0.01	1.3	1.3	0.3	3.4	0.2
11/20	-	S	0	-	7.3	25.0	34.94	0.04	1.1	1.5	1.0	3.6	3.5
12/5	0935	S	0	**	8.1	20.0	36.16	0.18	-	1.4	0.5	0.9	0.5
1957													
1/15	1015	S	0	-	7.5	21.4	37.20	0.02	-	1.3	0.0	2.0	1.5
2/12		S	0	-	-	25.5	38.23	0.10	0.3	0.4	0.5	1.1	1.0
3/20		S	0	-	7.8	25.0	35.56	0.10	1.2	1.5	0.9	1.7	1.0
4/4	0900	S	0	₩	-	25.5	36,62	0.03	0.6	3.0	0.7	2.2	2.9
5/16		S	0	~	\rightarrow	30.0	36.03	0.13					
5/29		S	0	-	-	28.9	37.63	0.00	1.4	1.7	0.2	1.1	1.8
6/13	1500	S	0	=	**	29.0	36.13	0.11				1.2	1.8
1955	STATIO	NC	26	Dept	h of a	2 feet	25°57	7.4' N	81	1°21.8	W		
4/13	1418	S	0	***	8 2	27.8	3.15	0.63					
	1450			_	0, 4		0.00						
7/25		S	0	_	=	31.3	0.05						
8/1	1435	S	0	540	and .	28. 4	0.05						
8/4	0955	S	0	140	_	28.0	0.08						
8/12		S	0			29.4	0.20						
8/18		S	0	en	-	30.0	0.05						
8/26	1250	S	0	-	=	29.9	0.00						
8/31	1108	S	0	pat .	8.0	28.5	0.13						
9/7	1625	S	0	-	→	28.3	0.00						
,,,													

		S				9.0	C 3		J	PO 4	NO~	~	D
Date	Time	or B	G.	breve M.	pН	°C	Sal.	Cu.	In.	Tot.	NO 2	Car.	Pro.
10/4	1530	S	0	641	7.9	28.0	0.10	**	-	0.6			
10/4	0917	S	0	p=1	**	24.4	0.10			0.0			
11/9	0945	S	0	e-1		23.0	0.30	0.14					
11/18	1320	S	0	-	₩	25.8	0.00	0.09					
11/28	1557	S	0	-	7.8	25.3	2.77						
12/6	1635	S	0	and	_	24. 4	0.00	0.09	946				10.8
12/14	1350	S	0	-	7.4	22.8	0.00	0.07					10.0
12/22	1040	S	0	-	7.0	21.8		0.34	1.2	1.3	***	0.1	8.5
1956	1040		0		1.0	21.0	0,55	0,51	1. 4	1,5		0.1	0, 5
1/4	1145	S	0	0.2	7.0	20.0	0.50	0.04					
1/10	1346	S	0	gwg	7.9	16.7		0.11					
1/24	1125	S	0	100	8.0	15.0		0.22					
2/1	1330	S	0	and	7.6	19.5	8.00						
2/8	1105	S	0	\$=0	7.6	24.0	15.55		1.1	2.3	and .	-	10.3
2/23	1425	S	0	ged	7.4	23.0		0.03	- 0 -	2, 0			20,0
3/6	1125	S	0	and		25.1	11.03		0.8	2.7	-	1.7	8. 9
3/23	1145	S	0	-	7.8	18.8	14.95					- • •	0 , /
4/10	1203	S	0	-		23.0	35.17		0.5	1.5		2.0	6.7
5/2	1100	S	0	-	8.0	27.3	7.59		2.0	5.3		5.6	1.8
5/8	1226	S	0	***	7.4	28.7	1.90	0.11	2,0	J, J		3,0	2,0
6/6	1104	S	0	***	8. 1	29.0	0.90	0.01	0.4	1.0	0.3	1.8	
7/10	1215	S	0	•	7.7	30.0	3,58	0.03	0.8	1.0		2.0	1.9
8/21	1350	S	0	5-4	8.1	31.5	1.36		0.7	1.0		2.9	2.0
9/18	1437	S	0	p=1	7.8	28.6		0.04	•	0.8		4.0	2.8
11/20	H	S	0	-	7.5	25.2		0.28	0.5	1.1		2.9	4. 2
12/5	1150	S	0	948	7.6	21.0		0.09	2.0	4.6		1.6	1.5
1957	2230		Ü		7.0	31. 0	3,01	0,07	2.0	1.0	J. 1	1.0	4,5
1/15	1130	S	0	400	7. 8	21.8	32.70	0.02	per	1.0	1.3	8.3	2.9
2/12	1245	S	0	-	₩	24.5	26.22		0.2	0.9		1.6	1.6
3/20	1050	S	0	•	7.9		1.10		w	1.6		0.8	3.6
4/4	1110	S	0	_	us /	26.2	2.21		0.4	0.8		1.3	3.8
	1634				7.7				0. 1	0.0	1	1. 3	3.0
5/16				100			36.03						
	1200						0.60		0.8	1 3	0.1	3.6	7.2
	1357			9=9		29.9	0.80						5.7
0/15	STATIC					27.7 2 feet	25°54			1°00' V		3.5	J. 1
1955	211110			Dept	11 01 6	1000	20 0	14			-		
	1000	S	0	645	7.3	23.6	0.00	0.12					
9/1		S	0				0.00			17.5			
	0945	S	0	-		20.0		0.15					

		S		,		0.0			F	°O ₄	NO⊶ 3		
Date	Time	or	-	breve	pН	°C	Sal.	Cu.				Car.	Pro.
		В	C.	M.					In.	Tot.	NO 2		
1956													
1/25	1155	S	0	040	844	20.0	0.10	0.07					
2/8	1010	S	0	948	7.1	23.0		0.04	4, 4	-	9-6	1.9	
3/6	0950	S	0	94	8. 1	21.3	0.10		0.4	1.1	64	0.9	9.4
4/10	1113	S	0	844	814	20.9	0.15	0.09					, , -
5/2	0940	S	0	848	7.6	26.5	1.20	0.07	0.3	0.8			
6/6	1010	S	0	Shop	7.6	25.0	0.10	0.01	2.1	3.5	1.6	8.6	1.3
7/10	1130	S	0	ene .	7.6	27.7	-	0.03	-	0.4		1.2	1.2
8/4	0905	S	0	846	0000	26.4	0.35	0.11					
8/21	1250	S	0	949	7.6	30.0	0.10	0.08	1.1	2.2	84	6.6	
9/18	1305	S	0	846	7.6	27.1	0.30	0.02	0.3	0.8	0.2	5.2	
11/20	845	S	0	848	7.3	25.0	0.10	0.24	0.3	1.4	1.9	3.3	0.0
12/5	1505	S	0	800	8.1	20.1	0.20	0.10	0-0	1.3	4.2	0.6	2.7
1957													
1/15	1500	S	0	848	8.0	21.6	0.40	0.10	646	1.6			
2/12	1150	S	0	•••	000	24.5	0.20	0.04					
3/20	1400	S	0	844	8.1	24.0	0.20	0.11	1.0	1.4	1.0	2.6	3.4
4/4	1430	S	0	-	(hel	26.0	0.20	0.00	0.4	1.7	3.4	1.8	3.0
5/16	1235	S	0	040	•	27.1	0.20	0.04					
5/29	1255	S	0	-	040	29.4	0.20	-	648	1.3	0.0		
6/13	1353	S	0	ы	040	31.7		0.20	0.1	0.9	-	3.8	6.8
	STATIO	NC	28	Dept	h of	2 feet	25°4	5.4' N	80	°44.2	¹ W		
1955													
9/1	1841	S	0	946	8.0	28.9	0.00		-	0.2			
12/22	0910	S	0	644	7.4	19.5	0.07	0.14	₩	-	-	3.8	
1956													
1/25	1130	S	0	949	846	20.5	0.10						
2/8	0930	S	0	**	••	22.0		0.05	-	-	-	3. 0	
4/10	1021	S	0	***	644	21.6	0.35	0.05	••	04		2.0	0.5
6/6	0935	S	0	per .	8.0	25.9	0.20		2.4	1.8	2.4	2.7	0.3
7/10	1120	S	0	0-0	am	28.4	M	0.02	0.7	0.8	-	-	1.4
8/21	1225	S	0	000	7.9			0.05		1.7			
9/18	1156	S	0			26.9		0.04			0.3		3.0
11/20	1445	S	0			25.0		0.11				2.7	3.2
12/5 1957	1445	S	0	0-0	8. 4	20.8	0.20	0.07	- find	1.7	2. 1	2.2	
•	1.400	C	0		7 0	22 7	0 50	0.00					
1/15	1400	S	0			22.7	0.50		0 0	0 0	0 7		2 /
2/12 3/20	1120 1315	S	0		ы 0 1	23.0 27.6		0.00		0.8		ы 2 1	3.6
		S	0	-			0.20		1.0			3.1	5. 4
4/4	1400	S	0	•	946	26.7	0.40	0.00	0.2	2. 4	4. 5	6.0	6.0

		S								DO.	NIO		
Dist	ω.		_	1	т т	°C	C - 1	Cu.		PO ₄	NO.	<i>C</i> .	77
Date	Time			breve	_	C	Sal.	Cu.			370	Car.	Pro.
		В	· · ·	М.					In.	Tot.	2		
5/16	1200	S	0	-	-	27.3	0.20	0.00					
5/29	1343	S	0	-	₩.	28.5	0.10	0.04	840	2.3	949	4.2	
6/13	1210	S	0	-	-	30.6	0.00	0.08	0.8	1.7	-	3.9	7.7
	STATIO	N C	29	Dept!	h of a	2 feet	25°45	5' N	80	0°26' W	V		
1955													
3/17	1625	S	0	240	8.0	27.5		0.22					
5/18	0826	S	0	Delta .	7.4	24.1	0.00	0.23					
9/1	1815	S	0	-	8.1	27.5	949	0.25	-	8.3			
12/22	0830	S	0	•••	7.1	22.5	0.07	0.21					
1956													
1/25	1313	S	0	••		23.0		0.07					
2/8	0820	S	0	-	7.3			0.05	0.1	4.0		2 2	
3/6	0845	S	0	-	7.8	22.5		0.10	0.8	4.9	•	2.3	0 0
4/10	0953	S	0	000	⇔	22.4		0.05	200	0.6	-	0.4	0.0
5/2	0820	S	0	-	7.3	27.5		0.20	0 4	0.8		1.6 2.8	F 0
6/6	0850	S	0	Date	8.2	27.6		0.12	0.4	0.8		1.3	5.0
7/10 8/21	1030 1105	S S	0	044	7.8 7.9	28. 1 34. 5	0.10	0.04	0.4	3.4		5.0	
9/18	1055	S	0		7.7	26.5		0.01	1.1	2.4		3.3	3.8
11/20	± 1033	S	0		7.4	24.8		0.08		2.6		1.2	6.8
12/5	1345	S	0	~	7.6	24. 1		0.12	1.1	1.9		1. 2	0.0
1957	1313		O		140	₩ 10 I	0,20	0,10	- • -	~• /	- 1		
1/15	1330	S	0	***	7.9	25.0	0.60	0.04	1.1	1.1	0.1	1.5	9.9
2/12	1030	S	0		-	23.0		0.00	0.3		-	1.9	
3/20	1220	S	0	00	7.7	25.9		0.09	2.7		3.2	4.5	6.6
4/4	1300	S	0	-	-	27.7	0.20		0.6		1.9	4.4	7.1
5/16	1115	S	0	146	Page 1	28.0		0.04					
5/29	1423	S	0	-	**	27.7	0.10	0.14	0.7	***	0.2	3.5	
6/13	1103	S	0	00	-	28.8	0.20	0.05	-	94	0.2		
	STATIO	NC	30	Dept	h of i	2 feet	25°4	5.5' N	80	0°25.8	' W		
1955													
5/18	0835	S	0	-		26.1	0.00	0.80					
9/1	1815	S	0	040	7.9	27.0		0.01		1.3			
12/22	0815	S	0	**	848	22.0	0.07	0.21	0.4	0.8			
1956													
1/25	1313	S	0	Des.	-	24.5	0.10						
2/8	0825	S	0	100		22.8		0.08					
3/6	0845	S	0	246		23.5		0.04		1.1	-	1.8	
4/10	0936	S	0	pad	-	20.7	0.10	0.06	_	-	tion .	1.5	

	D	m:	S	C 1	h m a	T T	°C	C - 1	C	F	04	NO~	Com	Pro.
	Date	Time	or B	C.	M.	рН		Sal.	Cu.	In.	Tot.	NO 2	Car.	Pro.
1	5/2	0840	S	0	—	7.2	25.0	0.10	0.10	0.4	0.9	011	bet	1.1
	6/6	0902	S	0	010	8.2	28.1	0.50	0.22		0.9	1.0	6.5	4.3
	7/10	1035	S	0	946	046	₩	0-0	0.03	0.7	1.5	3.2	040	4.0
	8/21	1110	S	0	040	8.2	31.0	0.10	0.05	0.3	0.6	1.9		
	9/18	1117	S	0	010	7.8	26.7	0.20	0.09	0.4	2.6	3.9	2.5	3.4
	11/20	946	S	0	640	7.2	25.0	0.30	0.10	0.1	0.9	6.3	2.5	6.6
	12/5	1330	S	0	949	7.7	24.8	0.10	0.04	949	2.1	5.8	2.8	
1	957													
	1/15	1335	S	0	deal	8.0	24.2	0.30	0.03		***	2.0	1.5	
	2/12	1045	S	0	449	**	23.6	0.05	0.00	0.2	0.9	-	-	6.2
	3/20	1230	S	0	100	7.8	25.7	0.20	0.13	•	1.0	3.8	1.8	6.6
	4/4	1315	S	0	010	840	26.4	0.10	0.00	0.8	1.6	6.5	2.6	7.6
	5/16	1110	S	0	040		26.0	0.20	0.04					
	5/29	1437	S	0	040	689	27.5	0.20	0.22	1.7	**	₩.	4.2	
	6/13	1118	S	0	•	**	28.8	0.00	0.13	0.2	0.5	0.2		
		STATIO	NC	31	Dept	h of :	34 feet	25°54	4. 4' N	81	°50.4	' W		
1	955													
	12/21	0919	S	P	-	7.8	19.6	35.88	0.19	0.5	0.7	-	2.5	1.0
			В	P	-	7.9	19.5	35.83	0.26	\$100	0.5		5.5	0.6
1	956													
	4/10	0900	S	0	-	8.1	22.7	37.12	0.04	0.3	0.5	-	0.6	0.8
			В	0	0-4	8.2	23.0	37.05	0.03	0.2	0.5	849	0.3	
	5/1	0912	S	P	-	7.8	24.3	36.92	0.50	0.2	0.5	0.0	1.7	0.0
			В	0	test.	7.9	24.7	36.98	0.13	546	***	0.3	1.8	0.0
	6/4	1021	S	0		8.2	28.4	37.11	0.06	**	0.0	0.3	2.9	0.0
			В	0	-	8.2	28.0	37.02	0.06	0.1	0.3	0.1	1.4	0.2
	6/19	1548	S	0	-	8.2	28.6	37.30	0.09					
			В	0	₩	8.2	28.0	37.31	0.10					
	7/10	0913	S	0	600	8.1	29.6	38.57	0.02		0.0	0.5	1.0	0.1
			В	0	040	8.1	29.5	38.49	0.08	0.3	1.5	0.5	1.1	0.3
	8/21	1019	S	0	48	8.4	31.0	38.17	0.05	0.2	0.3	0.4	0.5	0.2
			В	0	•	8.4	31.0	38.07	0.02	-	0.0	0.5	0.6	0.0
	9/18	1006	S	0	***	8.1	28.0	37.26	0.09	***	0.1	0.2	0.9	0.4
			В	0	-	8.1	28.2	37.22	0.11	0.2	0.4	0.4	1.0	0.1
	11/21	1213	S	0	-	040	24.0	36.48		***	0.3		1.6	0.4
			В	0	948	040	23.0	36.74		-	0.3		1.1	0.5
	12/5	1250	S	0	546	8.2	19.9	36.87		0.7	1.7		1.7	0.4
			В	P	144	8.2	20.0	36,82	0.19	***	0.8		0.4	0.3
1	957													
	1/15	1052	S	0	***	8.1	20.3	36.38	0.04	946	0.9			
			В	0	-	8.1	20.2	36.25	0.06	849	1.0			

				•									
Date	Time	S or B	G.	breve M.	рН	°C	Sal.	Cu.	In.	PO 4 Tot.	NO-3 NO-2	Car.	Pro.
1/28	1515	S	0	640	8.1	21.5	36.30	•	0.1	0.6	0.6	2.2	0.4
		B	0	-	8.1	20.5	36.23	-	0.0	1.2	-	2.5	0.4
2/11	1146	S	P	-	8. l	23.0	34.90	0.15	•	0.8	0.6	0.9	0.6
		В	0	-	8.1	23.0	35.00	0.12	0.9	0.9	0.9	1.5	0.6
3/20	0855	S	0	•	8.0	22.9	35.77	0.31	0.0	0.2	0.8	1.8	0.6
		В	0	94	8.0	22.2	35.71	0.04	0.0	0.6	0.7	0.8	0.5
4/3	1207	S	0	94	8.0	23.6	35.72	0.05	-	0.4	0.6	2.8	0.1
·		В	0	944	8.0	23.3	35.68	0.07	0.2	0.5	1.2	1.3	0.5
4/29	1201	S	0	-	8.1	25.5	35.80	0.16					
		M	0	-	8.1	25.3	35.78						
		В	P	••		25.3	35.76						
	STATIC			Dept		ó feet		1.31 N	81	°43.6	w		
1955													
4/19	1439	S	0	94	м	27.5	37.01						
4/29	0920	S	0	_	944	26.0	36.40						
9/6	1409	S	0	04	***	30.0	33.98						
770	1 10 /	В	0		••	30.2	34.34						
10/4	0942	S	0	_	••	28.3							
10 / 1	0 / 1-	В	0	•	•	28.3	35.01						
12/28	1122	S	0		•	19.4	35.26						
1956						- / • -	00,-0						
1/31	1440	S	0	••	94	20.5	35.72						
2/7	1442	S	0			24.5	35.80						
2/16	1455	S	0	_	***	23.0	35.73						
2/28	1540	S	0	000	94	24.6	36.51						
3/13	1132	S	0	••	9+4	25.5	36.98						
3/22	1400	S	0		-	19.7	37.53						
4/5	0955	S	0	•	04	24.0	37.94						
4/17	1605	S	0		••	23.5	37.46						
4/24	1128	S	0	_		24.5	37.03						
5/2	1409	S	0	948	000	28.5	37.13						
7/25	1325	S	0			30.5	38.71						
7/31	1350	S	0		**	31.5	39.85						
8/7	1307	S	0	_	_	31.5	38.65						
8/16	1340	S	0	_	••	31.5	38.37						
9/5	1350	S	0	_		29.0	37.86						
9/11	1528	S	0	_	_	27.5	37. 23						
9/26	1323	S	0	-		28.5	36.61						
10/1	1242	S	0	**	•	29.0	36.62						
10/1	1355	S		0-4	-	28.1	36.70						
		S	0	••	•••								
10/18	1445	3	0	ы	**	26.0	36.05						

Date	Time	S	C	breve	ъH	°C	Sal.	Cu.		PO ₄	NO=	Car	Pro.
Date	Time	or B	C.	M.	рп	C	Sal.	Ou.	Īn.	Tot.	NO 2	Car.	110.
10/29	1400	S	0		948	24.7	34.04						
11/6	1302	S	0	-	DF0	24.0	36.03						
11/21	1020	S	0		948	23.2	36.31						
11/28	1350	S	0	**	-	16.5	5.94						
12/10	1120	S	0	•	846	94	36.84						
12/11	1253	S	0	948	and .	21.9	36.62						
1957													
1/11	1336	S	0	948	948	22.5							
1/21	1354	S	0	-	**	19.0	36.40						
2/4	1325	S	0	•	**	24.3	36.72						
2/19	1521	S	0	**	nd .	22.5	36.80						
2/24	1228	S	0	940	•	21.5	36.48						
3/11	1318	S	0	848	948	19.0	35.12						
3/19	1310	S	0	240	-	24.0	35.41						
3/26	1148	S	0	94	-	24.5	35.67						
4/2	1309	S	0	•	•	24.5	35.94						
4/10	1042	S	0	•	**	27.2	36.25						
4/15	1512	S	0	•	**	27.0	35.62						
4/24	1550	S	0	P 4	90	27.0							
5/2	1145	S	0	••	-	27.2	35.96						
5/8	1445	S	0	-	***	25.5							
5/15	1307	S	P	₩	-	28, 5	36.34						
5/22	1350	S	0	P-0	848	30.3	38.18						
5/27	1610	S	0		94	30.0	38,60						
6/11	1515	S	0	₩	•	30,5	36.17						
1955	STATIO	ON C	33	Dept	h of	6 feet	25°54	9' N		81°41.7	w w		
3/17	0750	S	0	м	7.9	25.4	36.53	0 21					
4/14	1230	S	0		8. 2	27.0	37.05						
5/18	1200	S	0	_	7.7	28.9	37.24						
7/6	1314	S	0	_	## T	30.0	36.51						
7/19		S	0		49	31.7	35.44						
7/25	1225	S	0	-		31.5							
8/1	1230	S	0	••	**		31.53						
8/4	1112	S	0			29.4							
8/12	0930	S	0		84	30.0	33, 58						
8/18	1335	S	0	-		31.1	34.78						
8/26	1340	S	0		***	31.5	29.85						
9/7	1435	S	0			29.0	30.26			. 1.7			
10/4	1315	S	0			29.0	33.77						
10/27	1006	S	0	**	1 + 7 +=	25.1	35.44			0.5			
/	-000	~	9	-		20, 1	000 11						

Date	Time	S	G.	breve	На	°C	Sal.	Cu.	F	PO 4	NO-	Car.	Pro.
Date	THIE	В	C.		P				In.	Tot.	NO 2	041,	
11/9	1100	S	0	-	-	22.3	34.97	0.05					
11/18	1407	S	0	-	-	25.2	34.90	0.09					
11/29	0927	S	0	₩	8.0	21.2	39.59	0.12					
12/6	1735	S	0	-	8.1	23.3	35.38	0.22	0.6	0.9	94	3.4	6.6
12/14	1140	S	0	-	7.9	21.1	35.43	0.10					
12/22	1210	S	0	-	7.8	19.7	35.51	0.08	0.7	1.0	~	4.3	2.4
1956													
1/10	1435	S	0	840	7.9	15.3	35.61						
1/24	1320	S	0	m	8.0	17.0	32.13						
2/1	1124	S	0	=	8.0	18.0	36.21						
2/8	1345	S	0	-	8.2	24.0	35.57		1.9	2.1	200	040	2.1
2/23	1337	S	0	000	8.0	22.0	36.27						
3/6	1215	S	0	-	•	24.5	36.61		0.9	1.9		_	1.2
3/23	1045	S	0	_	8.2	17.4	37.01						
4/10	1356	S	0	-	-	22.0	38.03		0.9	1.1	**	0.9	1.1
5/2	1400	S	0	-	8.2	28.8	38.04		0.6	1.5	0.7	2.6	0.1
5/8	1134	S	0	-	8.0	28.7	38.56						
6/6	1400	S	0	-	8.2	29.5	37.99		0.4	1.2		2.0	
7/10	1420	S	0	940	8.2	31.8	38.38		0.6	0.8		1.1	
8/21	1517	S	0	-	8.2	33.0	38.80		0.6	0.9	PM .	1.3	0.1
9/18	1547	S	0	***	8.1	28.7	36.05		0.7	1.5		1.9	0.3
9/20	-	S	0	944	tes .	23.5	36.16		844	1.2		2.1	0.3
12/5	1015	S	0	-	8.2	22.3	36.82	0.20	-	1.9	4, 2	2.6	1.1
1957		_	_					/					
1/15	1040	S	0	949	7.8		37.20		-	0.5		3.9	3. 4
2/12	1535	S	0	141	\$49	24.8	37.01		0.5	0.6		0.7	0.2
3/20	0930	S	0	-	7.9	26.2	35.39		1.4	1.7		0.8	0.7
4/4	0950	S	0	144	040	25.0	35.93		0.4	2.9	0.9	2.2	0.8
5/16	1510	S	0	ted	-	29.5	36.01	0.08					
5/29	1041	S	0	-	gasts .	29.6	37.33	0.00	0.9	1.4		1.5	0.9
6/13	1525	S	0	₩	944	30.1	36.80		0.8	1.9		1.7	1.3
	STATIO	IN C	34	Dept	n oi	8 feet	25 55	.2' N	8.	1°38.5	. W		
1954	1/20	-	0			22 4	22.00						
3/22	1620	S	0	919	₩	22.4	33.22						
4/20	1520	В	0	949	-	22.4	33.28						
4/28	1520	S	0	5-9	99	28.8	29.67						
1055		В	0	-	200	28.5	30.55						
1955	0.050	c	0			10 4	25 15						
2/9 3/11	0859	S	0		949	19.4	35.17						
5/11	0900	S	0	5-0	\$10	22.3	36.27						
20-/		В	0	\$44	t-	22.3	36.22						
1956	1.40.4	-	0			0.4							
2/7	1434	S	0	Pell	PM.	24.3	35.70						

Dat	- Т	ime	S	G	breve	ъH	°C	Sal.	Cu.	PO_4	NO=	Car.	Dwo
Dat		IIIIC	В	C.		PII	0	Dai.	Ou.	In. Tot.	NO 2	Oai.	110.
1956													
5/2	13	358	S	0	-	₩	30.4	40.16	0.32				
6/5		508	S	0		8.0	29.6	37.41					
6/1		355	S	0	-	8.0	29.6	38.65					
7/2		355	S	0	•	8.1	30.0	40.26					
7/1	1 13	3 40	S	0	•••	8.2	31.5	39.44					
7/2	5 13	315	S	0	•••	8.1	32.0	41.58	0.09				
7/3		338	S	0	•	-	33.0	42.68	0.11				
8/1		329	S	0	₩	949	31.5	39.25					
8/2		105	S	0		***	32.1	39.74					
9/5		340	S	0	44	-	28.5	38.03					
9/2		311	S	0	•	-	29.7	35.91					
11/2		229	S	0	949	•	29.0	31.82					
12/1	0 11	105	S	0	••	•	23.2	36.11	0.08				
1957		201		0			22.0		0 01				
1/1		326	S	0	94	-	23.0	20 50	0.21				
2/4		315	S	0	•	646	29.8	39.59					
5/2		559	S	0	D 4	H	30.8	39.09		01 920 (1	717		
1956	512	ATIO	NC	36	рерт	n oi .	3 feet	45 54	2.7' N	81°29.6'	<u>w</u>		
3/2	2 13	340	S	0	•	8.1	19.2	38.75	0 02				
4/1		545	S	0	-	7.6	26.0	38.64					
4/2		418	S	0	b-d.	m	27.4	39.07					
5/2		351	S	0	•	-	28.7	39.83					
6/5		500	S	0	44	7.9	29.6	37.59					
6/1		345	S	0	•	8.1	29.8	37.07					
7/2		345	S	0	94	8.0	29.2	40.00					
7/1		332	S	0	-	8.2	32.5	35.80					
7/2	5 13	307	S	0	•	8.1	31.0	39.86	0.03				
7/3	1 13	330	S	0	•	•	32.0	39.53	0.03				
8/1		318	S	0	44		32.5	34.14					
8/2	8 11	118	S	0	-		32.7	38.03					
9/5		333	S	0	₩.	•	28.5	38.69					
9/2		300	S	0	•	646	29.5	33.46					
10/9		333	S	0	•	646	30.2	28.05					
11/2		321	S	0	-	-	26.0	30.56					
12/1	0 10)50	S	0	-	44	22.7	35.04	0.04				
1957	1 10	1.5	C				22.0		0 0 4				
1/1		317	S	0	-	-	23.0	20 47	0.04				
2/4	13	306	S	0	646	040	26.0	38.47	0.00				

70	m:	S	C	1	Т.Т	°C	S - 1	Cu.	P	04	NO-3	Com	. Pro.
Date	Time	or B	C.	breve M.	рн	C	Sal.	Cu.	In.	Tot.	NQ	Car	. Fro.
2/19	1509	S	0			25.0	39.44	0.08					
5/8	1428	S	0	0.0		25.5	38.48	0.09					
5/28	1553	S	0	-	-	31.5	39.00	0.12					
·	STATIO			Dept	h of	10 feet	25°51	.8' N	81	°23.3	t W		
1955													
2/24	0640	S	0	**	7.8	22.3	32.48	0.22					
3/17	0856	S	0	•	7.7	25.8	32.77	0.15					
4/13	1447	S	0	•	7.8	27.6	35.73	0.34					
5/18	1027	S	0	•	7.7	27.4	38.66	0.26					
6/22	1510	S	0	-	7.9	31.0	19.87	0.33					
7/19	1504	S	0	•	>→	30.9	20.68	0.05					
7/25	1350	S	0	••	-	30.2	₩.	0.64					
8/4	1005	S	0	•	**	27.8	0.95	0.25					
8/12	1118	S	0	•	**	29.4	13.66	0.15					
8/26	1235	S	0	-	•	30.5	7.41	0.01					
8/31	1045	S	0	-	7.8	28.7	5.05	0.27					
9/7	1555	S	0	e=	***	27.5	3.80	0.06	-	1.1			
10/4	1650	S	0	**	7.6	30.0	15.05	0.08					
10/27	0900	S	0	-	949	25.5	13.73	0.03					
11/9	0920	S	0	**	***	23.6	24.82	0.08					
11/28	1524	S	0		7.9	25.9	28.24	0.24					
12/6	1545	S	0	•	04	24.6	24.88	0.14	1.1	1.5	-	849	12.5
12/14	1300	S	0	-	7.6	22.0	9.74	0.14					
12/22	1055	S	0	-	7.3	20.9	27.21	0.26	•	1.3		1.0	4.6
1956													
1/4	1130	S	0	-	7.2	19.5	29.10	0.11					
1/10	1327	S	0	-	7.9	15.3	31.15	0.12					
1/24	1108	S	0	~	8.1	17.0	35.44	0.13					
2/1	1223	S	0	•	7.4	20.0	21.42	0.08					
2/8	1130	S	0	•	7.8	24.0	0.06	0.05	1.1	2.3	•	3.3	
2/23	1446	S	0	•	7.8	22.0	32.20	0.13					
3/6	1100	S	0	-	***	24.3	33.87	0.05	1.9	3.0	**	1.5	5.7
3/23	1200	S	0		8.0	19.8	36.64	0.04					
4/10	1258	S	0	•	•	21.8	39.27		1.4	2.4		••	5.5
5/2	1200	S	0	•		27.2	33.74		1.2	1.9	2.7	**	2.1
5/8	1257	S	0	-	7.6	30.0	34.96	0.17					
6/6	1125	S	0	64		29.4	33.30		0.7	2.0	0.8	2.7	1.4
7/10	1235	S	0	***		30.0	25. 42		1.8			2.3	1.8
8/21	1422	S	0	849	8.0	33.0	34.35	0.07	1.8	9.7	0.4	2.8	1.3

_														
			S							P	0	NO⊷		
	Date	Time	or	G.	breve	На	°C	Sal.	Cu.		4	NO NO	Car.	Pro.
			В	C.		1				In.	Tot.	2		
-	0/10	1415		0		7 0	20 0	21 25	0.04	0.5	1.0	0 E		
	9/18	1415	S		=	7.9	28.9	31.35					2 1	6.5
	11/20	1120	S S	0	-	7.5	25.3			1.6		3, 2	3, 4	
	12/5	1130	5	0	-	7.9	20.0	18.03	0.23	₩	1.8	4. 1	4. 3	2.8
1	957	1200	C	0		7 0	22 0	10 10	0 02	1 0	1 2	1 2	2 1	2 0
	1/15	1200	S	0	0-0	7.8	23.0	19.10		1.0	1.2		3.1	3.0
	2/12	1315	S	0	-	7 5	24.5	36.35		0.9		2.7	1.4	1.9
	3/20	1030	S	0	•••	7.5	26.5	28.51		3, 5		2.1	3. 1	4. 1
	4/4	1100	S	0	•••	-	26.4	30.38		1.3	4. /	2.8	2.5	3.6
	4/29	1550	S	0	-	7.9	26.2	37.50						
	5/8	1601	S	0	-	7. 4	⇔	28.70		1 2	2 1	0 4	1 0	F 0
	5/29	1138	S	0	•	•	29.5	31.37		1.2		0.4	1.9	5.0
	6/13	1408	S	0	₩ T) = 0.41	→	30.0	33.08		1.4			3, 3	5. 1
,	055	STATIC	N C	36	Dept	n oi 4	42 feet	25°49	. IV	81	°53.5	. VV		
1	955	1454	C	0			20. 2	26 05						
	7/7	1456	S B	0	-	-	29.2 29.1	36.85						
	7/27	1505		0	946	949		36.85						
	7/27	1505	S	0	~	•	30.9 30.5	36.67						
	8/18	1443	B S	0		•	30.6	36.67 35.70						
	0/10	1443	B	0	**		30.3							
	0/22	1535	S	0		₩		36.27						
	8/23	1333	В	0	-	deriff	32.2 30.8	36.55						
	9/22	1410	S	0	••	-		36.45						
	9/22	1410	В	0	-	-	30.3 29.2	36.24						
	10/4	1435	S	0	-	-	29.5	35.61						
	10/6	1433	В	0	••	64	29.7	35.61						
	10/27	1614	S	0		644	25.6	36.15						
	10/2/	1014	В	0	es es	-	25.0	36.06						
	12/22	1144	S	P	•		20.0	36.00						
	14/44	1144	В	P			19.8	35.95						
1	.956		D	F	-	-	17.0	20.70						
1		1320	S	0			20.3	36.30						
	2/8	1320		P	-		19.9	36.31						
	2/12	0022	В		64	0.0		36.16						
	3/13	0922	S B	0	-	-	23.0 22.9	36.16						
	5/2	1501	S	0	•	-	25.2	36.74						
	5/4	1501	B		040	•		36.84						
	6/5	1501	S	0		**	25.3	37.23						
	6/5	1501		0	-	-	29.2							
	6/10	1522	В	P	-	910	28.3	37.14						
	6/19	1522	S	0	-	040	29.6	37.59						
			В	0	-	600	28.4	37.67						

		S]	20	NO-		
Date	Time	or	G.	breve	pН	°C	Sal.	Cu.		4	ОИ	Car.	Pro.
		В	C.	M.					In.	Tot.	2		
7/11	1458	S	0	-	010	30.5	37.83						
1/		В	P		-	30.0	37.96						
8/29	1448	S	0	-	gel	32.0	38.48						
0,-,		В	0	98		31.5	38.35						
11/20	1210	S	0		-	23.0	36.56						
,		В	0	•	00	23.2	36.67						
12/6	1455	S	0	-	-	21.0	36.95						
		В	0	-	44	20.2	36.99						
1957													
1/16	1506	S	0		-	21.8	36.43						
		В	0	-	get	20.5	36.51						
1/29	1450	S	-	0.2	240	21.0	36.50						
		В	0	-	-	20.5	36.40						
2/12	1531	S	P		~	22.3	36.32						
		В	P	•	-	22.3	36.48						
4/4	1149	S	0	e4	pel .	23.8	36.26						
		В	P			23.4	36.17						
	STATIO	NC	39	Dept	h of	23 feet	25°50	.5' N	8	1°46.4	w W		
1955									_				
3/16	1132	S	0	94	8.0	24.6	35.93	0.20					
		В	0	949	8.1	24.5	35.90	0.08					
4/20	1325	S	0	94	8.0	26.1	36.29	0.08					
		В	0	-	8.1	25.8	36.35	0.11					
6/21	1325	S	0	-	8.1	28.9	36.74						
		В	0		8.1	28.4	36.74	0.20					
7/7	1055	S	0	a4	7.9	29.1	35.90	0.34					
		В	0	-	8.0	29.1	35.68	0.16					
7/26	0900	S	0	-	-	29.5	35.01	0.92					
		В	0	64	-	29.7	36.06	0.08					
8/22	1037	S	0	-	-	30.9	35.79	0.12					
		B	0	gen.	44	31.1	35.81	0.18					
9/6	1108	S	0	~4	948	30.5	35.10	84	**	0.5			
		В	0	040	948	30.3	35.19	0.12	-	0.3			
9/21	1054	S	0		**	30.2	33.13		0.6	0.8	1.8	0.6	1.7
		В	0	-	-	30.0	34.58		0.6	0.8		1.5	0.8
10/4	1022	S	0	-	_	28.4	34.88		-	0.3			
·		В	0	44	-	28.9	35.05		get	0.3			
10/26	1048	S	0	04	-	24.9	36.42		-	0.4	0.2	0.0	0.9
		В	0	***	04	24.5	36.42		849		3.2	-	5.5
12/21	0950	S	0	-	7.9	19.5	35.79		44	0.5	-	0.6	0.8
		В	0	-	8.0	19.5	35.72			0.6	-	0.2	2.0

	Date	Time	s or B	G. 1:	oreve M.		°C	Sal.	Cu.	In.	PO 4 Tot.	NO-3 NO-2	Car.	Pro.
_	054						-							
1	.956 2/7	1130	S	0	640	8.1	21.1	35.94	0.05	_	***	010	0.0	1.7
	2/1	11.70	В	0	•	8.2	20.6	36.05		0.1	0.4	w0	0.8	0.5
	3/5	1143	S	0	946	7.8	22.2	36.23		0.2	0.2	_	1.1	1.2
	0,0		В	0	949	7.9	21.9	36.24		0.4	1.0	**	1.0	0.8
	5/1	0943	S	0	00	8.3	26.8	37.56		0.2	0.7	0.2	0.7	0.1
	-,-	-,	В	0	000	8.3	26.4	37.59	0.09	0.1	0.6	1.1	1.2	
	6/4	1137	S	0	84	8.2	28.6	37.51	0.05			0.2	1.2	0.0
	·		В	0	₩.	8.1	28.6	37.41	0.05		0.2		2.4	0.0
	6/19	0908	Ş	0	₩.	8.1	28.0	38,00	0.11					
	7/10	0943	S	0	84	8.1	29.5	38.85	0.03	0.1	12.4	0.9	0.5	0.0
			В	0	sell.	8.1	29.5	38.35	0.03	0.2	0.7	0.5	0.7	0.1
	8/21	1045	S	0	**	8.2	31.3	38.65	0.05	0.3	0.3	1.9	0.9	0.0
			В	0	•	8.3	31.3	38.68	0.01	0.2	0.2	0.5	0.5	0.1
	9/18	1030	S	0	••	8.1	27.8	37.30	0.07	0.1	0.6	-	1.3	0.1
			В	0	849	8.1	28.0	37.30	0.04	0.2	0.4	0.0	1.5	0.2
	11/21	1139	S	0	••	8.2	23.3	36.39	•••	000	0.2	0.0	0.4	0.3
			В	0	000	8.2	22.9	36.41	0.00	000	0.4	0.0	1.4	0.9
	12/5	1315	S	0	99	8.1	20.1	36.80	0.06	0.8	1.2	0.4	1.0	0.4
			В	0		8.2	20.0	36.84	0.10	0.3	0.8	1.0	0.7	1.5
1	.957													
	1/15	1116	S	0	849	8.1	20.3	36.33		840	1.0			
			В	0	-	8.2	20.2	36.34		₩	0.9			
	1/28	1543	S	0	•	8.1	21.3	36.11	849	0.7		0.2	0.3	0.5
	0.100		В	0	000	8.2	21.0	35.99		0.2		0.4	2.1	0.5
	2/11	1210	S	0		8.1	23.0	35.40	0.12	0.6		0.7	1.4	0.5
	2/20	0025	В	0	•	8.1	23.3	35.40	0.08	PM 0	0.7	0.4	0.8	1.8
	3/20	0925	S	0	-	8.0	23.7	35.66	0.08	0.0		3.8	1.1	0.6
	1/2	1222	B S	0	•	8.0	22.8	35.68 35.83	0.04	0.1	0.5 0.4	0.9	1.6	0.9
	4/3	1233	В	0	610	8.1	24.0 23.6	35. 92		-	0.5		2.6	0.9
	4/29	1229	S	0			25.5	35. 76		_	0.5	0.4	2.0	0.7
	4/47	1227	В	0			25.3	35.62						
		STATIO					12 feet	25°49		8	1°26.5	ı w		
1	954	DIATIO	14 0	10	Dept	11 01 .	1000	25 T/	10 21	<u> </u>				
•	3/22	1520	S	0	Trig.	600	23.8	31.85						
	2,		В	0	64	pro .	23.0	32.88						
	4/28	1410	S	0		••	28.4	25.73						
	-,		В	0	***	•	28.2	26.13						

Date	Time	S or B	G. b	M.	рН	°C	Sal.	Cu.	In.	PO ₄ Tot.	NO-3 NO 2	Car.	Pro.
1955													
2/23	1705	S	0	₩	040	21.6	34.47						
4/6	0818	S	0		-	24.0	36.42						
4/21	0814	S	0	949	004	25.6	37.61						
6/2	1800	S	0	p=0	-	29.9	37.99						
6/22	1433	S	0	***	-	30.4	30.66						
·		В	0	-	940	30.1	31.27						
6/23	0851	S	0	p=0	944	29.9	26.73						
10/5	0723	S	0	-	-	28.3							
		В	0	-	940	28.1							
1956													
2/7	1410	S	0	9=0	200	24.2	34.63						
12/18	1432	S	0	9-9	g=4	25.0	35.02						
		В	0	-	-	25.1	35.20						
1957													
4/29	1509	S	0	**	0.0	25.9	37.65						
		В	0	-	200	25.8	37.46						

	STATIO	ON C	41	Dep	th of	2 feet	25° 4	8.31 N		81°	20.9° W		
		S							P	0	NO ₃ -		
Date	Time	or	G.	breve	Нq	°C	Sal.	Cu.		4	3	Car	Pro.
		В	C.	M.	•				In.	Tot.	NO 2	Oar.	110.
1956													
3/22	1225	S	0	_	8.2	18.7	34.69	0.02					
4/17	1532	S	0	_	8.0	27.0	38.06	0.00					
4/24	1406	S	0	••	000	27.0	37.88	0.06					
6/5	1410	S	0	**	8.1	29.4	36.91	0.03					
6/19	1250	S	0		8.0	28.5	38.27	0.05					
7/2	1250	S	0	**	8. 1	29.0	39.58	0.22					
7/11	1220	S	0	_	8.2	31.8	36.66	0.03					
7/31	1220	S	0	_	-	31.0	37.56	0.02					
8/28	1120	S	0		-	32.0	32.18	0.01					
9/5	1232	S	0			29.0	30.60	0.02					
9/26	1246	S	0	_	•	29.1	26.29						
10/1	1214	S	0	_	-	29.2		0.01					
10/1	1355	S	0	-	-		24. 24						
12/10	1044	S	0	_	••	28.7	26.91	0.10					
1957	1044	ی	U	-	-	23.0	30.69	0.04					
2/4	1258	S	0		tes	26.0	37.58	0.03					
5/8	1415	S	0	-	••	25.5	33.38	0.01					
5/28	1542	S	0	₩	-	30.5	35.29	0.12					
	STATIC	ON C	42	Dept	th of	2 feet	25° 4	61 N		81° 2	231 W		
1955													
4/19	1544	S	0	-	•	27.0	37.43						
4/29	1001	S	0		-	25.8	37.88						
1956	1255	C	0			24.0	24 66						
2/7	1355	S	0	-		24.0	34.66						
2/16	142 0 1503	S S	0	-	-	25.0	34.72						
2/28 3/22		S	0	-	-	24.7	35.88						
4/17	1220 1525	S		_	_	18.7	37.68						
			0	-	-	25.0	37.94						
4/29	1358	S	0	_	-	25.5	38.26						
5/2	1257	S	0	-	-	27.4	37.69						
6/5	1405	S	0	_	-	29.1	37.55						
6/19	1240	S	0		-	28.5	38.95						
7/2	1240	S	0	-	-	29.0	40.04						
7/11	1324	S	0	***	***	31.0	39.48						
7/25	1202	S	0	-	***	29.5	40.15						
7/31	1209	S	0	-	949	31.0	37.46						
8/7	0857	S	0	-	-	30.5	38.91						
8/16	1206	S	0		-	31.0	37.95						
8/28	1134	S	0	-	-	32.0	35.65						
9/5	1225	S	0	-	-	28.5	37.59						
9/11	1324	S	0	-	••		22.78						
9/26	1150	S	0	••	-	29.0	28.03						
10/1	1140	S	0	-	-	28.2	32.67						
10/9	1215	S	0	940		29.7	23.61						

	<u></u>	S							P		NO-		
Date	Time	or		reve	рΗ	°C	Sal.	Cu.		4	NO 3	Car.	Pro.
		В	C.	<u>M.</u>					In.	Tot.	2		
10/18	0758	S	0	-	-	25.0	29.92						
10/24	1258	S	0	-	-	27.2	27.57						
10/29	1237	S	0	-	044	25.5	28.18						
11/6	1150	S	0	-	-	24.5	28.25						
11/21	1148	S	0	-	-	24.5	32.48						
11/28	1214	S	0	-		16.2	33.53						
12/10	0900	S	0	-	-	21.7	35.93						
1957	1157	C	0			21 =	36.49						
1/11	1157	S S	0	_	-	21.5							
1/21	1208	S	0		-	25.0	37.40						
2/4 2/19	1213 1453	S	0	-	-		37.71						
		S		_	_	23.6	38.29						
2/24	1153		0	_	-	21.5	38.40						
3/11	1233	S		-	-	19.0	36.37						
3/19	1123	S	0	-	-	25.0	36.87						
3/26	1020	S	0	-	-	25.0	36.37						
4/2	1147	S S	0			24.5	36.36						
4/10	0729		0	-	-	26.5	37.06						
4/15	1338	S	0	_	-	26.0	36.52						
4/24	1400	S	0	_	-	26.0	20 52						
5/2 5/8	1113	S S	0		-	27.5	38.52						
5/15	1022	S	0		-	25.0 27.5	39.02						
5/15	0910	S	0	-	_		37.58						
5/44	1220		0	-	-	31.0							
1955	STATIC	DN C	43	Dept	hof	50 feet	25° 4	2.5' N		81°	55.21 W	_	
2/23	1431	S	0	-	8.0	19.9	36.08	0.20					
		В	0	era.	8.1	18.3	36.11	0.20					
4/21	1335	S	0	_	8.1	26.3	36.60	0.04					
		В	P	_	8.2	25.0	36.58	0.01					
6/23	1155	S	0	-	_	29.2	36.82	0.23					
		В	0	-	-	28.9	36.76	0.31					
7/7	1412	S	0	-	7.9	29.5	36.82	0.62					
		В	0	-	8.0	29.1	36.76	0.56					
7/27	1436	S	0	_	-	31.0	36.82	0.12					
		В	0	-	-	30.5	36.76	0.04					
8/23	1503	S	0	on	04	32.2	36.91	0.33					
		В	0	-	-	30.9	36.83	0.16					
9/22	1336	S	0	-	**	30.0	36.33	0.18	99	0.7	1.6	1.2	0.3
		В	0		~	29.2	36.24	0.07	-	0.4	1.1	0.5	0.4
10/6	1355	S	0	-	-	29.6	35.59	0.02	***	0.1			
1956		В	0	-	-	29.4	35.55	0.16	00	0.1			
2/8	1219	S	0	-	8.0	19.9	36.50	0.11	-	0.0	gan.	0.8	0.7
		В	0	94	8.1	19.8	36.49	0.05	0.2	0.6	gen.	1.2	1.2

			S			-				D	0	7.0 -		
	Date	Time	or	G. b:	resse	рН	°C	Sal.	Cu.	X-1	0	NO-	C - ~	Pro.
	Date	Tille	_B	C.	_M.	hu	C	nar.	ou.	In.	Tot.	NO	Car.	EIO.
•	5/2	1430	S	0	- 171.	8.4	25.3	36.92	0.00		0.2	0.0	0.7	0.0
	512	1150	В	0	_	8.4	25.7	36.84	0.17	0.1	0.4	0.2	0.6	0.0
	6/5	1428	S	0	_	8.1	29.7	37.07	0.07	0.3	0.3	0.0	1.7	0.0
	0/3	1120	В	0	-	8.1	28.5	37.18	0.08	0.3	0.7	0.0	1.0	0.2
	7/11	1424	S	0		8.2	30.2	37.57	0.05	0.2	0.5	0.5	0.7	0.0
	. ,	1.0.	В	0	_	8.2	30.0	37.53	0.05	-	0.0	2.2	0.6	0.0
	8/29	1409	S	0	_	8.2	32.6	37.86	0.04	0.1	0.7	0.2	0.2	0.0
	-,-,		В	0	_	8.2	31.7	37.88	0.06	_	0.2	0.0	_	0.1
	11/20	1245	S	0	_	8.2	23.2	36.56	0.19	0.1	0.1	0.1	0.3	0.5
			В	0	_	8.3	23.0	36.67	0.47	0.3	0.4	0.3	0.4	0.3
	12/6	1425	S	0	_	-	21.0	36.98	0.06	0.4	_	1.2	0.9	1.2
	1957		В	0	-	-	20.9	37.08	0.08	0.0	0.8	0.2	0.8	0.5
	1/16	1432	S	0	_	8.1	22.2	36.75	0.13	_	1.0			
			В	0	_	8.2	21.0	36.59	0.07					
	1/29	1416	S	0	-	8.1	21.4	36.50		-	0.2	0.1	0.0	0.4
			В	0	-	8.2	21.4	36.70	-	0.0	0.4	0.5	0.3	
	2/12	1501	S	0	-	8.1	22.5	36.33	0.11	_	0.6	0.8	1.4	0.2
			В	P	-	8.2	22.5	36.83	0.18	0.6	0.6	0.4	1.2	0.6
	4/4	1110	S	0	-	-	23.8	36.23	0.06	-	0.2	6.6	1.3	0.6
			B	P	-	-	23.5	36.15	0.26	0.4	0.5	0.5	0.8	0.0
		STATIC	ON C	44	Dep	th of	21 feet	25° 4	51 N		81°	431 W		
	1955	15.45	-								-			
	4/5	1547	S	0	-	-	23.4	35.79						
	4/20	1401	В	0	_	-	23.5	35.81						
	4/20	1401	S B	0	-	-	26.1 26.4	36.55						
	6/2	1435	S	0	-	_	29.6	36. 1 7 37. 98						
	0/2	1400	В	0	_	_	29.6	37.96						
	6/21	1402	S	0	_	_	28.8	36.24						
	0/21	1102	В	0	_		29.0	36.27						
	7/7	1138	S	0	_	-	29.1	36.17						
	. , .	1100	В	0	_	~	29.0	36.17						
	8/18	1251	S		_	_	30.6	35.97						
	-,		В	0	_	_	30.0	35.99						
	8/22	1109	S	0	_	_	31.3							
			В	0	-	-	30.9	35.93						
	9/9	1138	S	0	-	-	30.9							
			В	0	-	-	30.2	35.84						
	9/21	1126	S	0	0.00	-	30.3	33.96						
			В	0	-	-	30.1	34.00						
	10/4	1051	S	0		_	29.1	33.39						
	.0.107		В	0	-	-	29.0	33.40						
	10/26	1120	S B	0	-	_	25.0 24.8	36.55 36.56						
	12/21	1026	S	0	-	_	19.6	35.62						
			В	0	-	-	19.5	35.62						

		S						_	F	PO ₄	NO-		
Date	Time	or	G. b		рН	°C	Sal.	Cu.			NO_2^3	Car.	Pro.
		В	C.	Μ.					In.	Tot.	2		
1956	1202	c	0			21 2	35.90						
2/7	1203	S B	0	_	_	21.3	35.82						
2 / 5	1214	S		_	-	21.4							
3/5	1216	В	0	ent	_	22.5	36.32						
E / 1	1016	S	0	-	-	22.3	36.44						
5/1	1016		0	-	_	26.8	37.41						
6/1	1200	B S	0	_	010	26.4	37.45						
6/4	1209		0	_	_	29.0	37.66						
(/30	0025	В	0	-	-	29.0	37.72						
6/19	0935	S	0	-	-	28.1	38.18						
5 / 2 0		В	0	pub.	-	28.0	38.37						
7/10	1018	S	0	-	-	29.4	38.38						
0.10:		В	0	-	-	29.5	38.35						
8/21	1118	S	0	000	•	31.4	39.52						
0.130	1050	В	0	-	_	31.4	39.35						
9/18	1059	S	0	010	_	28.3	37.66						
22/23		В	0	040	-	28.5	37.65						
11/21	1111	S	0	-	~	22.8	36.27						
2015	3045	В	0	-	•••	23.0	36.34						
12/5	1345	S	0		-	19.3	36.68						
30/00	1/00	В	0	-	ove	19.4	36.61						
12/20	1609	S	0	-	-	27.8	36.74						
1957		В	0		_	28.0	36.71						
1/15	1143	S	0	-	_	20.4	36.62						
		В	0	-	-	20.5	36.67						
1/28	1614	S	0	_	-	21.8	36.57						
		В	0	-	-	21.8	36.51						
2/11	1241	S	0	•••	-	23.7	35.40						
		В	0	↔	-	24.0	35.60						
3/20	0955	S	0	_	-	24.0	35.89						
		В	0	***	-	23.4	36.01						
4/3	1302	S	0	₩	-	24.1	35.98						
		В	0	-		23.9	35.92						
4/29	1301	S	0		_	25.6	35.68						
		В	0	-	-	25.3	35.62						
	STATIO	ON C	45	Dept	h of	20 feet	25° 42	.71 N	1	81°	41.21 W	r	
1955 4/20	1433	c	0			26.1	36.47		•			-	
7/20	1433	S B	0	_	_	26.4	36.51						
6/2	1453	S	0	4		29.5	37.47						
0/2	1400	В	0	-	_	29.5	37.36						
6/21	1415	S	0	_	-	28.6	36.33						
0/21	1113	В	0		_	29.1	36.27						
7/7	1152	S	0	-	-	29. 2	36.63						
1/1	1152	В	0	~									
		D	U	0.00	-	29.1	36.63						

		S							P	O 4	NO-		
Date	Time	or	G. b	reve	рН	°C	Sal.	Cu.		4	NO	Car.	Pro.
		В	C.	M.		·			In.	Tot.	2		
9/6	1246	S	0	-	_	30.5	35.77						
		В	0	**	_	30.1	35.75						
9/21	1142	S	0	_	-	-	33.62						
		В	0	_	**	-	33.76						
10/4	1109	S	0	_	ma	28.9	33.96						
	/	В	0	-	-	29.0	33.89						
1956 6/19	0949	S	0	-		28.5	38.09						
0/1/	0 / 1 /	В	0	_		28.0	38.12						
12/20	1630	S	0			22.9	36.71						
	1030	В	0			23.0	36.72						
1957	1316	S	0	_	_	25.7	35.98						
4/29	1310	В	0	-	**								
		D	U	**	-	25.5	36.00						
	STATIC	ON C	46	Dept	h of	18 feet	25° 42	2.71 N		81°	34.41 1	N	
1955	7546	-				22 /	2/ 15					_	
4/6	1546	S	P		_	23.6	36.17						
	- /	В	P	-	00	23.6	36.20						
4/20	1641	S	0	-	_	26.5	36.58						
		В	0	-	-	26.5	36.56						
6/2	1646	S	0	_	•	29.5	37.64						
		В	0	***	-	29.4	37.64						
6/23	0943	S	0	-	-	29.3	36.58						
		B	0	-	-	29.4	36.55						
10/4	1529	S	0	-	**	29.0	33.60						
		B	0	_	•	28.9	33.55						
12/21	1142	S	0	-	-	20.0	35.87						
1956		В	0	-	**	20.2	35.81						
2/7	1258	S	P	-	-	22.3	36.07						
		В	0	_	-	21.8	36.02						
3/5	1314	S	0	-	**	23.0	36.32						
		В	0	_	-	22.5	36.32						
5/1	1147	S	0	-	_	26.3	37.49						
, -		В	0		-	26.5	37.49						
5/4	1308	S	0	_	-	29.3	38.01						
-,-		В	0		0.0	29.0	37.92						
6/19	1036	S	0		_	28.5	38.14						
0/1/	1000	В	0	_	_	28.2	38.08						
7/10	1110	S	0	-	-	29.2	38.38						
1 / 10	1110	В	0	_		29.5	38.56						
8/21	1200	S	0	-	_	31.3	38.75						
0/21	1200			-	_		38.69						
0/10	1147	В	0	-	_	31.5	38.10						
9/18	1147	S	0	**	-	28.1	38.23						
11/21	1020	B S	0	_	-	28.1 23.0	36.26						
11/21	1020	B		-	0.0								
		D	0	-	-	23.0	36.36						

					_,								
		S							P	04	NO_		
Date	Time	or	G.	breve	рΗ	°C	Sal.	Cu.		4	NO.	Car.	Pro.
		B	C.	M.					In.	Tot.	NO ₂		
12/5	1433	S	0	==	_	19.2	36.57						
		В	0	-	-	20.0	36.53						
12/17	1850	S	0	-	-	22.9	36.66						
		В	0	_	-	23.0	36.79						
12/20	1704	S	0	-	-	23.2	36.63						
1057		В	0	-	-	23.4	36.53						
1957 1/15	1231	S	0	-		20.8	36.82						
1/13	1231	В	0	_	_	20.6	36.84						
1/28	1710	S	0	_	_	21.5	36.39						
1/20	1110	В	0	_	_	21.5	36.52						
2/11	1245	S	0	-	-	24.3	35.60						
2/11	1345			849	_								
2/20	1051	В	0	-	_	24.3	35.70						
3/20	1051	S	0	-	-	24.1	35.98						
4./2	1252	В	0	_	_	23.4	36.01						
4/3	1352	S	0	•	-	24.0	36.25						
1 /00		В	0	-	••	24.0	36.18						
4/29	1405	S	0	-	-	25.5	37.01						
		В	0	-	-	25.5	36.98						
3054	STATIC)N (3 47	Dept	h of	ll feet	25° 4	4.9' N	_	81°	29.9' W	_	
1954 4/28	1343	S	0	_	-	27.5	32.03						
		В	0	_	_	26.7	32.12						
1955 2/9	1047	S	_	200	_	18.9	35.35						
-,,	2021	В	_	200	_	18.7	35.32						
2/23	1635	S	_	150	••	20.1	35.37						
2,23	1000	В	_	150	_	20.0	35.30						
2/24	0815	S	0	_	**	20.0	35.35	0.10					
3/15	1120	S	P	_	7.9	24.7	35.62	0.17					
3/13	1120	В	0	_	8.0	24.6	35.55	0.06					
3/31	1839	S	0	_	-	21.0	36.27	0,00					
3/31	1037	В	0	_	_	20.8	36.18						
4/5	1710	S	0	_	_	23.3	36.17						
4/3	1110	В	0	_	_	23.7	36.17						
4/6	0843	S	0	_	-	23.1	36.06						
4/0	0043	В	0	-	-	23.0	36.06						
4/20	1718	S	0	_	7.9	26.6	36.71	0.07					
4/20	1710	B			8.0	26.5	36.71	0.01					
6/22	1407		0	-		30.5	36.64	0.45					
6/22	1407	S	0	-	7.7 7.7	29.5	36.64	0.36					
6/22	0010	В	0	-		29.5	35.90	0.07					
6/23	0918	S	0	849		29.3	36.08	0.07					
10/5	0746	B S	0	_	_	28.5	30.10	0.16	_	0.4			
10/3	0170	В	0	_	_	28.3	30.10	0.15	_	2.2			
12/21	1209	S	0	_	8.1		35.65	0.10	_	u . L			
12/21	1207	В	0	_	8. 1	20.5	35.68	0.37	0.3	0.4	-	0.4	

1		S			,				P	0	NO-		
Date	Time	or	G. b	reve	nН	°C	Sal.	Cu.	1	4		Car	Pro.
Date	111110	В	C.	M.	P	Ü	5000	04.	In.	Tot.	NO_2^3	Car.	Fro.
1956													
2/7	1321	S	0	-	8.1	22.9	35.95	0.02	0.2	1.9	_	0.8	0.7
		В	0	-	8.2	22.9	36.04	-	0.5	0.6	-	-	0.9
3/5	1337	S	0	-	7.8	23.2	36.55	0.07	0.1	0.5	_	1.3	2.8
		В	0	-	7.8	22.9	36.56	0.08	0.4	2.0	-	0.2	1.7
5/1	1210	S	0	-	8.2	26.9	38.03	0.08	0.4	0.6	0.0	2.1	0.1
		В	0	_	8.2	26.7	36.78	0.00	0.4	0.9	0.5	2.5	0.0
6/4	1334	S	0		8.2	29.5	37.74	0.09	0.4	0.8	0.0	2.6	0.0
		В	0	-	8.2	29.4	37.74	0.06	0.3	0.6	0.4	2.0	0.1
7/10	1132	S	0	_	8.2	29.2	38.61	0.00	-	0.4	0.2	1.9	0.2
		В	0		8.2	29.0	36.63	0.08		0.6	1.1	1.0	0.2
8/21	1225	S	0		8.2	32.0	39.68	0.03	0.6	0.8	0.4	0.9	0.0
		В	0	-	8.3	31.5	39.81	0.06	0.8	1.0	0.0	1.4	0.1
9/18	1211	S	0	_	8.1	28.0	39.04	0.09	0.4	0.8	0.2	1.7	0.3
		В	0	_	8.1	27.9	39.05	0.05	0.3	0.3	0.3	1.2	0.2
11/21	1000	S	0	-	8.2	22.8	36.40	0.18	0.1	0.3	0.3	1.2	0.4
		В	0	-	8.2	23.9	36.34	0.35	0.1	0.7	0.5	1.2	0.4
12/5	1500	S	0	-	-	19.8	36.40	0.20	-	0.9	1.1	1.2	0.2
1957		В	0	-	-	20.1	36.38	0.40	0.3	-	0.7	1.4	0.8
1/15	1253	S	0	-	8.1	21.4	37.05	0.06	_	0.8			
		В	0	_	8.2	21.0	37.10	0.09	_	1.0			
1/28	1732	S	0	-	8.2	23.0	37.53	_	0.3	0.9	0.1	0.5	0.4
·		В	0	_	8.2	23.0	37,62	_	0.2	0.2	0.1	3.2	0.6
2/11	1409	S	0	_	8.1	24.7	36.50	0.13	_	0.9	0.5	1.9	0.8
		В	0	_	8.2	25.0	36.50	0.14	_	1.2	0.4	0.8	0.7
2/24	0815	S	0	-	_	20.0	35.35	0.10					
3/20	1115	S	0	-	8.1	24.7	36.63	0.40	0.0	0.5	1.0	1.7	0.7
		В	0	-	8.0	24.5	36.75	0.04	0.0	0.8	1.2	1.3	0.4
4/3	1416	S	0	019	-	24.5	37.13	0.05	-	0.7	4.2	2.2	0.8
		В	0	_	-	24.3	37.13	0.22	0.5	1.0	2.2	1.5	1.2
4/29	1437	S	0	_	8.1	25.6	37.70	0.11					
		В	0	-	8.2	25.3	37.78	0.12					
	STATIO	או כ	4.8	Don	th of	35 feet	250 /	10.71 N	Ţ	810	49¹ W		
1955				Бер				10.11	-	01	1/ //		
4/21	1258	S	0	-	-	26.2	36.49						
		В	0	-	-	25.4	36.51						
6/23	1125	S	0	-	-	29.3	36.58						
		В	0	-	-	29.0	36.55						
7/7	1325	S	0	ten		29.9	36.47						
		В	0	-	-	29.4	36.33						
7/27	1409	S	0	-	-	30.9	36.67						
		В	0	-	-	30.4	36.51						
8/18	1331	S	0	tee	-	30.6	36.64						
		В	0	-	-	30.6	36.65						

	SIAIIC		40 (Cont	L J								
		S							P	0	NO-		
Date	Time	or	G. b	reve	рН	°C	Sal.	Cu.		4	NO.	Car.	Pro.
		В	C.	M.					In.	Tot.	NO ₂		
9/22	1306	S	0	_	_	29.9	36.56						
		В	0	_	_	29.5	36.58						
1956	1006		0			23.5	36.17						
3/13	1006	S			_	23.5	36.16						
F / O	1055	В	0	_	_		36.05						
5/2	1355	S	0	-		26.1							
		В	0	~	-	26.5	37.00						
6/5	1354	S	0	-	010	29.3	37.57						
		В	0	-	-	29.3	37.53						
6/19	1442	S	0	-	-	29.7	38.14						
		В	0	_	_	28.7	38.12						
7/11	1350	S	0	_	-	30.0	37.85						
		В	0	~	_	29.8	37.83						
8/29	1338	S	0	-	-	32.4	38.25						
		В	0	-	-	31.6	38.34						
11/20	1312	S	0	→	_	23.0	36.59						
		В	0	_	-	23.5	36.81						
12/6	1400	S	0	-	***	20.4	37.21						
		В	0		-	20.5	37.05						
1957	1407					22.1	36.79						
1/16	1407	S	P	-	-		36.73						
1 /20	1050	В	P	-	_	21.0							
1/29	1350	S	0	_	-	21.3	36.60						
		B	0	-		20.8	36.70						
	STATIC	O NC	: 49	Dep	th of	22 feet	25° 4	0.3^{i} N	1	81°	39.211	N	
1954	1055	C				20.1	34.22						
3/22	1055	S	P	-	-								
4/20	1220	В	0		•	20.1	34.18						
4/28	1230	S	P	_	-	27.5	34.40						
1955		В	P	_	•	26.3	34.33						
2/9	1420	S	_	85	-	18.6	34.99						
		В	_	45	-	18.7	34.99						
2/23	1546	S	P	-	-	20.5	35.41						
		В	P	040	-	19.0	35.44						
2/24	1358	S	P	***	7.8	19.5	35.44	0.00					
		В		25	7.8	19.0	35.37	0.06					
3/10	1334	S	P	-	-	22.9	35.44						
		В	0		-	22.8	35.44						
3/15	1025	S	-	105	7.9	24.0	35.61	0.16					
		В	-	95	7.9	23.9	35.62	0.20					
3/16	1015	S	0	_	_	24.0	35.81						
		В	0		_	23.8	35.75						
3/31	1418	S	P	-	-	22.3	36.15						
3/31		В	_	35	***	21.9	36.13						
4/5	1620	S	P	→	-	23.3	36.09						
4/3	1020	В	P	_		23.4	36.00						
		D	F	-	-	45.4	50.00						

4			S	<u>-</u>		<u> </u>				P	0	NO-		
	Date	Time	or	G. bi	reve	рН	°C	Sal.	Cu.	_	4	3 NO	Car.	Bro
	Date	111110	В	C.	M.	P		1002	0	In.	Tot.	NO 2	Car.	FIU.
	4/6	1519	S	P	-	-	23.6	37.75						
	270	131/	В	-	35	_	23.5	36.04						
	4/20	1505	S	0	•	8.1	26.0	36.45	0.07					
	-,		В	0	•	8. 1	26.1	36.38	0.08					
	6/2	1514	S	0	_	-	29.4	37.18						
	-,-		В	0	_	_	29.4	37.29						
	6/21	1433	S	0	_	_	29.5	35.44	0.50					
			В	0	_	_	29.2	36.20	0.20					
	7/7	1214	В	0	_	7.9	29.1	36.74	0.44					
	7/26	1006	S	0	_	_	30.0	36.78	0.31					
	,		В	0	_	_	30.0	36.78	0.18					
	8/22	1143	В	0	•	_	31.0	36.20	0.06					
	9/6	1221	S	0	_	_	_	36.08	0.26	_	15.5			
			В	0	-	-	_	36.02	0.03		1.2			
	9/21	1156	S	0	-	-	30.4	34.14	0.13	0.4	1.1	0.6	0.4	0.9
			В	0	-	-	30.0	34.40	0.07	0.7	2.2	1.1	2.0	1.0
	10/4	1120	S	0	-	-	29.1	34.87	0.08	***	0.3			
			В	0	-	-	28.9	34.87	0.27		0.3			
	10/26	1203	S	0	-	-	25.5	36.20	0.03	-	0.8	2.8	2.8	1.4
			В	0	•••	-	25.0	36.15	0.05	1.2	1.3	2.4	1.5	2.0
	12/21	1100	S	0	-	7.8	19.6	35.88	0.25	0.1	0.1	-	1.1	1.1
	1956		В	0	-	7.8	20.0	35.95	0.16	-	1.1	-	0.7	0.9
	2/7	1232	S	0	-	8.1	21.3	35.97	0.02	0.2	0.2	-	2.4	1.0
			В	0	-	8.2	21.4	35.90	0.02	-	-	-	1.0	1.5
	3/5	1246	S	0	-	8.0	22.9	36.40	0.14	0.6	2.2	-	-	1.3
			В	0	-	8.0	22.4	36.41	0.12					
	5/1	1056	S	0	-	8.2	25.9	37.33		0.1	0.4	0.2	1.0	0.0
			В	0	-	8.2	25.2	37.38		0.1	0.5	0.2	1.0	0.2
	6/4	1238	S	0	-	8.1	29.1	37.76	0.06		0.8	0.6	1.7	0.1
	(120		В	0	-	8.1	29.0	37.00	0.10	-	0.1	0.0	2.2	0.0
	6/19	1005	S	0		8.1	28.5	38.10	0.05					
	7/10	1041	В	0	-	8.2	28.1	38.08	0.10	0 1	0 1	1 2	1 0	0 1
	7/10	1041	S		-	8.2			0.04		0.1	1.2	1.0 0.7	0.1
	8/21	1139	B S	0	010	8.2	29.4 31.5	38.05 38.98	0.04	_	0.1	0.4	0.7	0.0
	0/21	1137	В	0	_	8.3	31.5	39.00	0.04		0.3	0.4	0.3	0.1
	9/18	1124	S	0		8. 1	28.3	37.79	0.05	_	0.2	0.9	1.5	0.0
	// 10	1101	В	0	_	8. 2	28.0	37.80	0.08		0.4	0.0	1.3	0.0
	11/21	1042	S	0	_	8. 2	23.0	36.49	0.12		0.3	0.2	2.0	0.2
		1010	В	0	-	8. 2	23.0	36.32	0.02	_	0.4	0.1	0.8	0.3
	12/5	1410	S	0	_	-	19.9	36.75	0.22		0.4	0.2	1.2	0.5
			В	0	_	_	21.2	36.60	0.06		1.0	1.0	1.5	0.5
	1957 1/15	1209	S	0		8.1	20.4	36.69	0.04		1.0		,	
	-, 20	/	B	ŏ	_	8. 1	20.5	36.61	0.06	•	1.3			

					-,							
		S							P		NO-	
Date	Time	or	G. b	reve	рН	°C	Sal.	Cu.		4	NO ³	Car.
		В	C.	M.				•	In.	Tot.	2	
1/28	1642	S	0	_	8.2	21.3	36.27	_	0.0	0.4	0.0	0.6
		В	0		8.2	21.3	36.23	-	0.0	0.3	_	1.2
2/11	1310	S	0	00	8.0	24.6	35.60	0.16	0.4	0.7	0.3	
2/11	1310		0		8.0							0.9
2/20	1027	В		_		25.0	35.80	0.18	~ 1	1.0	0.8	1.4
3/20	1027	S	0	•	8.1	23.9	36.01	0.04		0.4	2.0	0.9
		В	0		8.0	23.2	35.90	0.16	0.0	0.2	0.8	2.5
4/3	1325	S	0	***	•	24.0	35.98	0.00	••	0.4	0.8	1.2
		В	0		-	23.7	36.07	0.00	0.9	0.9	1.2	1.6
4/29	1342	S	0	***	8.1	25.5	36.00	0.10				
		В	0	-	8.1	25.4	36.09	0.22				
	STATIC		50	Done	th of	5 foot	250 4	1 ! NT		010	17 51 317	
1956	SIATIC	DIN C	50	Depi	11 01	5 feet	25° 4	1. 1/		01	17.5' W	-
3/22	1210	S	0	-	8.2	18.0	36.87	0.03				
4/17	1515	S	0		7.8	25.0	37.52	0.05				
4/24	1347	S	0		_	26.0	36.85	0.00				
5/2	1246	S	0	-	-	27.2	37.80	0.16				
6/5	1355	S	0	_	8.2	29.0	38.07	0.11				
6/19	1230	S	0		8.0	28.5	39.02	0.06				
7/2	1235	S	0	_	8. 1	29.2	40.14	0.15				
7/11	1059	S										
			0	•	8.3	30.2	38.78	0.33				
8/28	1146	S	0	~	-	32.1	32.32	0.02				
9/5	1210	S	0	~	-	28.5	34.58	0.04				
10/24	1248	S	0		-	-	16.04	0.41				
1957	1425	C	0			22.2	2/ 12	0.0/				
1/15	1425	S	0	040	0.0	22.3	36.13	0.06				
2/4	1202	S	0	-	000	24.5	36.79	0.08				
3/11	1225	S	0	~	**	19.5	33.50	0.04				
5/8	1032	S	0	00	00	25.0	38.63	0.07				
	STATIC	IN C	5.1	Dent	h of	24 feet	25° 3	7 I NI		Q 1 °	36.8' W	
1955	DIATIC	714 0		Dept	.11 01	ZT ICCL	23 3	1 14		01	J0.0 W	
4/20	1538	S	0	_	**	25.9	36.27					
· ·		В	0		_	26.0	36.26					
6/2	1542	S	0			29.6	36.79					
V / U	1010	В	0	_	_	29.4	37.04					
6/21	1502	S	0	_	-	29.4	36.53					
0/21	1302			-	-							
7/2/	1050	В	0	-	-	29.0	36.55					
7/26	1052	S	0	**		30.4	36.85					
0.1		В	0	•	-	30.2	36.87					
8/22	1217	S	0	-	**	31.0	38.82					
		В	0	-	-	31.0	36.36					
9/21	1232	S	0			30.1	36.17					
		В	0	**	-	30.0	36.11					
10/4	1345	S	0	-	-	29.5	36.02					
		В	0	-	-	29.4	35.91					

Pro.

0.5 0.5 0.5 1.6 0.0 0.5 0.7

STATION C 51 (Cont'd)

		S							P	0	NO-		
Date	Time	or	G. b	reve	рΗ	°C	Sal.	Cu.		4	NO_2^3	Car.	Pro.
		В	C.	M.					In.	Tot.	2		
10/27	1422	S	0	_		26.0	36.04						
		В	0	_	-	25.6	36.06						
1956	1100												
6/19	1122	S	0	_	-	29.0	38.15						
		В	0	-	-	28.0	38.01						
12/21	1000	S	0	-	-	23.0	36.48						
		В	0	-	-	23.0	36.56						
	STATIC		52	Dont	h of	20 feet	25° 39	2 1 N		Q 1 °	32' W		
1955	SIATIO		. 52	Debi	.11 01	20 1661	43 37	7. J. IA	_	01	27. 44		
4/20	1611	S	0	_	_	26.3	36.38						
-, -		В	0	_	_	26.3	36.35						
6/2	1616	S	0	_	_	30.0	37.89						
0/2	1010	В	0			29.3	37.38						
10/4	1500	S	0	_	-								
10/4	1508			-	_	29.3	35.48						
1956		В	0	-	_	29.7	35.44						
5/1	1241	S	0	-	-	26.4	37.43						
		В	0	-	-	26.5	37.46						
6/4	1402	S	0	-	-	29.3	37.60						
		В	0	_	-	29.0	37.56						
6/19	1055	S	0	-	•	28.1	38.14						
		В	0	_	_	28.1	38.02						
7/10	1158	S	0	_	_	29.4	38.34						
·		В	0	_	-	29.2	38.31						
8/28	1135	S	0	_	-	31.0	39.35						
0,20		В	0	-	_	31.0	39.41						
9/18	1241	S	0		=	28.0	38.33						
//10	1411	В	0	_	_	28.0	38.20						
11/21	0929	S				22.6	36.53						
11/21	0727		0	-	-								
32/5	1520	В	0	-		22.8	36.41						
12/5	1530	S	0	-	_	19.5	36.56						
1957		В	P	-	***	20.0	36.55						
1/15	1320	S	0	-	_	21.1	36.77						
		В	0	-	_	20.7							
1/28	1759	S	0	_	-	21.7	36.87						
-,-0	/	В	0	_	_	21.7	36.92						
2/11	1436	S	0	_	_	24.5	36.00						
5/11	1130	В	0	_	_	24.6	36.00						
3/20	1142	S	0	_	_	24.9	36.34						
3/20	1116	В	0	_	_	23.9	36.38						
4/3	1443	S	0	_	_	24.0	36.66						
4/3	1440			_	-								
		В	0	-	-	24.0	36.76						

	STATIO	ON C	53	Dep	th of	9 feet	25° 3	9.8' N		81°	22.31 W	Ī	
		S							P		NO-		
Date	Time	or		reve	рН	°C	Sal.	Cu.		4	NO ₂	Car.	Pro.
		В	C.	М.					In.	Tot.	2		
1955	112/	~	D			10.0	22.0/						
2/9	1126	S	P	-	-	19.2	33.86						
0.10.1	0051	В	P	-	-	19.1	33.86						
2/24	0851	S	0	•	-	20.3	34.83						
3/31	1756	S	0	_	-	20.7	35.95						
	0025	В	0	_	544	20.6	35.88						
4/6	0927	S	0		-	23.1	35.91						
	0010	В	0	-		23.0	35.86	0.10					
4/21	0912	S	0	-	7.7	25.8	36.85	0.10					
(/22	1000	В	0	6+8	7.8	25.7	36.83	0.02					
6/22	1323	S	0	-	7.7	30.0	37.52	0.15					
		В	0	_	7.7	29.7	37.68	0.14		0 4			
10/5	0827	S	0	-	-	28.3	30.59	0.09	₩.	0.4			
1		В	0	_	-	27.9	30.81	0.14	- (0.7		/	4 -
10/27	1320	S	0	-	-	26.5	33.21	0.25	0.6	0.6	1.0	13.6	4.1
		В	0	-	_	26.5	33.21	0.08	0.6	0.6	1.2	12.0	2.5
12/21	1307	S	0	-	-	20.8	33.84	0.15	0.2	0.5	-	1.2	
		В	0	-	₩	21.0	34.28	0.06	0.2	0.6	0=0	0.8	2.0
	STATIC	ON C	54	Dep	th of	6 feet	25°3	81 N		81°	16.4° V	V_	
1955 4/19	1057	S	0			25.3	36.13						
1956	1051	5	O	_	_	25.5	50.15						
1/31	1351	S	0	_	-	21.7	35.08						
2/7	1342	S	0	_	_	24.0	33.66						
2/16	1405	S	0	-	_	24.0	33.82						
2/28	1446	S	0	-	-	26.1	34.69						
3/13	1035	S	0	-	-	25.0	34.20						
4/17	1507	S	0	_	_	25.6	38.54						
4/24	1341	S	0		_	25.7	37.53						
5/2	1242	S	0	_	_	27.3	37.27						
6/5	1350	S	0		-	27.8	36.11						
6/19	1220	S	0		_	29.5	38.70						
7/2	1230	S	0	•	_	29.0	38.60						
7/11	1105	S	0	-	_	28.9	38.03						
7/25	1140	S	0	***	_	29.0	38.45						
7/31	1155	S	0	•	-	30.5	36.38						
8/7	0920	S	0	-	_	30.2	37.85						
8/16	1150	S	0	_	•	31.5	37.32						
9/5	1205	S	0	-	_	28.5	36.28						
9/11	1314	S	0	•	_	28.2	37.25						
9/26	1123	S	0	_	_	28.5	32.62						
10/1	1100	S	0	_	_	28.5	34.36						
10/9	1158	S	0	-	840	29.8	34.11						
10/18	0815	S	0	0=0	0+0	24.8	30.83						
10/24	1240	S	0	_	-	27.2	33.95						

Date	Titore o	S	C 1		Т.Т	0.0	C 1	C	F	PO 4	NO-	-	
Date	Time	or		reve	рН	°C	Sal.	Cu.			NO ₂	Car.	Pro.
10/20	1221	В	C.	<u>M.</u>		35 /	21 04		In.	Tot.			
10/29	1221	S	0	-	•	25.6	31.04						
11/6	1135	S	0	-	0.0	24.0	33.10						
11/21	1134	S	0	-	-	24.0	34.81						
11/28	1158	S	0	-	-	16.3	33.95						
12/10	0925	S	0	-	-	22.0	35. 29						
12/15	1225	S	0	-	-	23.7	36.00						
12/17	1201	S	0	-	-	24.2	35.75						
12/18	1118	S	0		***	24.0	35.67						
12/19	1213	S	0	-	-	24.0	35.74						
12/28 1957	1345	S	0	-	-	18.0	35.19						
1/11	1133	S	0		-	21.0	35.42						
1/21	1153	S	0	**	-	20.2	36.60						
2/19	1439	S	0	-		23.0	37.29						
2/24	1136	S	0	-	-	22.0	36,51						
3/11	1220	S	0			19.0	35.97						
3/19	1109	S	0	0.00	-	24.0	36.68						
3/26	1005	S	0	040	-	24.3	36.27						
4/2	1132	S	0	_		23.5	37.23						
4/10	0744	S	0	_	-	26.0	39.38						
4/15	1325	S	0	_	-	26.0	37.67						
4/24	1345	S	0	↔	-	25.5							
5/2	1057	S	0		-	27.0	38.11						
5/8	1039	S	0	***	-	25.0	37.97						
5/15	0925	S	0	-	-	26.8	35.95						
	STATIC	N C	55	Dent	h of	4 feet	250 3	9.7' N		81° 1	0.71 W		
1956				D cpt					-			-	
3/22	1300	S	0	-	8.2	19.0	21.80	0.02					
4/17	1457	S	0	-	8.2	25.7	25.89	0.07					
4/24	1326	S	0	-	0.00	26.7	26.83	0.23					
5/2	1230	S	0	-	-	28.3	27.50	0.13					
7/2	1220	S	0	•••	8.0	29.0	32.23	0.13					
7/11	1205	S	0	010	8.0	30.5	31.71	0.08					
7/25	1130	S	0	•	8.1	29.6	28.50	0.02					
7/31	1146	S	0	-		31.0	21.38	0.02					
8/16	1143	S	0	***		31.5	16.52	0.01					
8/28	1158	S	0		-	33.2	14.71	0.02					
9/26	1113	S	0	-	-	29.0	8.08	0.01					
10/1	1055	S	0	-	-	28.2	8.44	0.03					
10/9	1149	S	0	₩.	-	31.1	7.46	0.04					
11/21	1135	S	0	~	-	24.4	4.72	0.04					
12/10 1957	1038	S	0	•	-	22.7	₩	0.06					
1/11	1125	S	0	440	-	21.7	7.50	0.14					

	STATIC		22 (Conti	1)							
		S							PO	NO-		
Date	Time	or		breve	рН	°C	Sal.	Cu	4	NO^3	Car.	Pro.
		В	C.	М.				In.	Tot.	2		
2/19	1430	S	0	0-0	-	24.0	13.11	0.09				
3/11	1213	S	0	-	-	20.0	14.29	0.08				
5/8	1312	S	0	-	-	25.7	17.33	0.07				
	CT A TITO	NT C	= /	D		12 6	2502	14 21 27	0.7.4			
1955	STATIC	JIN C	30	Бер	in oi	42 feet	45 3	34.2' N	81	51' W		
4/6	1423	S	0	-	_	23.4	35.12					
		В	0	-	_	23.2	36.36					
7/27	1335	S	0	***	_	31.0	36.31					
		В	0		_	30.0	36.40					
8/23	1428	S	0		_	32.0	36.89					
		В	0	_	-	31.2	36.82					
9/22	1243	S	0	-	_	30.0	36.67					
		В	0	_	_	30.2	36.55					
10/5	0955	S	0	-	_	28.5	32.97					
		В	0	-	_	28.2	32.90					
10/6	1325	S	0		***	29.4	35.99					
		В	0	_	-	29.5	35.90					
10/27	1515	S	0	_	_	25.5	36.58	0.21 0.9	3.4	2.2	8.0	1.2
		В	0	_	-	25.7	36.53	0.02 0.6		1.2	0.6	0.7
12/22	1135	S	0	_	8.1	21.0	36.34	0.50 0.4		_	1.4	0.8
1956		В	0	-	8.2	20.7	36.41	0.41 0.3		-	5.8	0.9
2/8	1141	S	0	_	8.0	20.0	36.51	0.03 -	_	_	0.6	0.6
2,0		В	0	-	8. 1	20.0	36.65	0.08 -	_	_	1.2	0.4
3/13	1045	S	0	_	8.0	23.4	36.16	0.10	_	-	1. 2	0.4
0,10	10 10	В	0	-	8.0	23.1	36.17	0.08 0.3	3 1.4	-	0.7	0.0
5/2	1321	S	0		8.3	25.8	36.94	0.08 0.0		0.4	1.1	0.0
3/4	1351	В	0	_	8.4	26.3	36.93	0.05 0.3		0.2	1.5	0.0
6/5	1306	S	0		8. 1	29.7	37.57	0.12 0.2		0.1	1.8	0.0
0/3	2000	В	0	_	8.2	28.8	37.51	0.07 0.6		0.0	2.2	0.0
7/11	1253	S	0	_	8.1	30.0	37.52	0.06 0.2		0.7	0.8	0.0
.,		В	0	-	8.2	29.9	37.53	0.06 -	-	0.1	1.1	0.1
8/29	1303	S	0	-	8.3	32.1	37.54	0.05 -	_	0.3	0.5	0.0
,		В	0	644	8.3	31.5	37.46	0.03 0.2		0.4	0.5	0.0
11/20	1347	S	0		8.2	23.3	36.51	- 0.2		0.4	0.5	0.2
		В	0	_	8.2	23.8	36.65	0.40 -	0.0	0.0	0.8	0.2
12/6	1328	S	0	-	_	20.9	36.93	0.10 0.1		0.5	0.9	0.4
		В	0	_	-	21.0	36.84	0.04 0.1		0.7	0.8	0.4
1957 1/16	1329	S						0.04 -			., 0	
1/10	1347		0	-	8.2	21.8	37.18		0.8			
		M B	0	-			37.02		1.1			
1/29	1316	S	0	-	8.3	21.0	36.82	0.06 -	0.5	0 3	1 7	0.3
1/47	1310	B	0	_	8.1	21.3	36.70 36.80	- 0.2 - 0.1		0.3	1.7 0.5	0.1
2/12	1420	S	0	-	8. 1	22.5	36.34	0.18 0.2		0.8	0.8	0.9
2/12	1120	M	0	-	8.2	22.5	36.64	0.13 0.3		0.7	1.3	0.3
		В	0	_	8.2	22.2	36.68	0.16 0.5		0.4	1.9	0.0
					_				- • -		/	

		S							P		NO-		
Date	Time	or	C	breve	рН	°C	Sal.	Cu.	T	4		-	-
Date	Time	В	C.	M.	Pil	0	oar.	Ou.	In.	Tot.	NO_2^3	Car.	Pro.
4.14	1022					24.2	2/ 27	0 04					
4/4	1022	S	0	_	_	24.3	36.27	0.04		0.4	0.2	1.1	0.0
		M	0	-	-	24.3	36.29	0.02	0.3	0.6	0.3	1.7	0.7
		В	0	-	-	23.6	36.26	0.07	_	0.4	0.7	2.4	0.0
1055	STATIO	ON C	57	Dept	h of	31 feet	25° 3	31 N		81°	42.5' W	r	
1955 4/21	1149	S	0		_	26.2	36.33					_	
7/21	114/	В	0	_	_	25.7	36.36						
7/27	1302	S	0	_	_	30.5	36.55						
1,21	1302	В	0	_		30.0	36.36						
8/23	1339	S	0	_	_	31.8	36.85						
0/23	1337	В	0		_	31.0	36.82						
9/22	1206	S	0	_	_	29.2	36.35						
,,,,,	1500	В	0	_	-	29.6	36.33						
10/4	1234	S	0	_		29.1	36.45						
	1001	В	0	-	_	29.5	36.47						
1956	1241												
5/2	1241	S	0	-	-	26.0	36.35						
(1=	1004	В	0		-	25.6	37.02						
6/5	1234	S	0		4.9	29.9	37.33						
(1 - 0		В	P	-	-	28.8	37.48						
6/19	1151	S	0	•	-	29.4	37.85						
		В	0		-	28.2	37.84						
7/11	1217	S	0	-	-	29.9	37.85						
- 4		В	0	-	-	29.8	37.81						
8/29	1229	S	0	_	-	31.8	38.16						
		В	0	_	-	31.5	38.34						
12/6	1255	S	0	-	the	20.1	36.73						
1957		В	0	-	-	20.1	36.71						
1/16	1254	S	0			21.2	37.30						
		В	0		_	21.0	36.91						
1/29	1236	S	0	-	-	21.5	36.69						
		В	0	-	Gert	21.2	36.75						
2/12	1342	S	0	-	_	23.3	36.38						
		В	0	-		23.0	36.47						
4/4	0946	S	0	-	-	24.0	36.29						
		В	P	-	-	23.7	36.36						
	STATIO	NI C	5.0	Dont	h of	31 feet	250 2	1.3' N		810	38' W		
1955	DIATIC	JIV O		Debr	.11 01	JI ICCL	20 0	1.5 1					
4/6	1326	S	0	_	-	23.6	36.00						
		В	0	-	-	23.4	36.09						
4/21	1116	S	0	-	-	26.0	36.35						
		В	0		_	25.9	36.31						
6/21	1528	S	0	040	8.2	29.7	36.82	0.30					
		В	0	_	8.2	29.0	36.83	0.30					
7/27	1237	S B	0	-	-	30.7 29.9	36.94 36.33	0.33					
		В	0	-	-	29.9	36.33	0.12					

		S				2.5			F	PO ₄	NO-		
Date	Time	or B	C.	M.	рН	°C	Sal.	Cu.	In.	Tot.	NO_2^3	Car.	Pro
8/23	1317	S	0		_	31.9	36.85		2116	100.			
		В	0	-	_	31.4	36.87						
9/22	1145	S	0	_	-	29.4	36.20	0.33	_	_	-	_	0.8
		В	0	_	-	29.3	36.11	0.09					
10/4	1311	S	0	-	-	29.3	36.73	~	-	0.4			
		В	0	-	•	29.1	36.82	0.02	-	0.2			
10/26	1314	S	0	-	-	26.0	35.99						
1956		В	0	-	-	25.8	35.93						
5/2	1218	S	0	-	-	26.0	36.94						
		В	0	-	•••	26.5	36.93						
6/5	1208	S	0	-	-	29.3	37.48						
		В	0	-	-	28.9	37.41						
7/11	1154	S	0	-	-	29.9	37.97						
		В	0	•	-	30.0	38.13						
8/29	1209	S	0	-	_	31.8	38.16						
		В	0	-	-	31.5	37.99						
12/6	1235	S	0	-	-	20.0	36.99						
1957		В	0	-	-	20.0	36.82						
1/16	1233	S	0		_	21.2	37.14						
		В	0	_	-	21.0	37.32						
1/29	1215	S	0	-	_	21.5	36.68						
		В	0	400	_	_	36.62						
2/12	1320	S	0	-	-	23.8	36.60						
		В	0	-	_	23.6	36.43						
4/4	0926	S	0	_	_	24.0	36.45						
		В	0	_	_	23.8	36.26						
	STATIC	ON C	59	Dept	h of	22 feet	25° 3	2.81 N	1	81°	28¹ W		
1955 2/9	1255	S	_	150	Po.	18.9	35.50						
2//	1200	В	-	450	-	20.1	35.50						
2/24	1245	S	_	35	_	19.5	35.61						
-,		В	-	55	-	19.5	35.57						
3/15	1231	S	0	-	_	24.3	35.79						
,		В	0	-	_	24.3	35.81						
3/31	1516	S	0	_	_	22.4	36.13						
,		В	0		-	22.0	36.02						
4/6	1012	S	0	_	-	23.4	35.99						
		В	0	_	_	23.2	36.04						
4/21	1013	S	0	-	-	26.0	36.42						
		В	0	_	444	26.0	36.44						
6/22	1239	S	0	_	_	30.1	37.57						
		В	0	_	-	29.8	37.57						
7/26	1137	S	0	_	-	29.9	37.07						
		В	0	~	_	29.8	37.09						

		S							P	0	NO-		
Date	Time	or		oreve	рН	°C	Sal.	Cu.		4	NO_{2}^{3}	Car.	Pro.
		В	C.	M.					In.	Tot.	2		
8/22	1301	S	0	_	-	31.5	41.45						
		В	0	_	_	31.9	42.17						
9/21	1310	S	0	_	-	30.1	35.07						
		В	0	_	_	30.1							
10/5	0905	S	0	_	_	28.9	36.15						
1956		В	0	-	-	28.9	36. 18						
3/6	1004	S	0		_	22.4	36.51						
370	1001	В	0	_	_	22.5	36.54						
5/1	1319	S	0		_	26.8	37.13						
3/1	1317	В	0	-		27.5	37.21						
6/4	1441	S	0	-	-								
0/4	1441			-	-	29.3	37.57						
7/10	1224	В	0	-	-	29.0	37.53						
7/10	1234	S	0	-	-	29.4	38.83						
0./20	1010	В	0	-	-	29.4	38.91						
8/28	1210	S	0	-	-	31.4	39.39						
0/10	/	В	0	-	-	31.8	39.46						
9/18	1316	S	0	-	-	28.5							
		В	Ø	-	-	28.7	38.62						
11/21	0857	S	0	-	-	22.8	36.61						
		В	0	-	-	22.8	36.64						
12/5	1630	S	0	-	-	19.8	36.75						
		В	0	-	-	20.0	36.63						
12/21	0923	S	0	-	-	23.1	36.69						
1957		В	0	-	-	23.1	36.80						
1/15	1351	S	0	_	-	21.2	37.11						
		В	0	_	_	21.0	37.07						
1/28	1834	S	0	_	_	21.4	36.77						
-,		В	0	_	_	21.5	36.44						
2/11	1508	S	0	_	_	24.0	35.90						
-,	1000	В	0	-	_	24.0	35.80						
3/20	1220	S	0	_	_	24.5	36.70						
3,20	1000	В	0		_	23.8	36.71						
4/3	1515	S	0	_		24.5	36.81						
1/3	1313	В	0	_	-	24.3	36.54						
				-	_								
1054	STATIC	N C	60	Dept	h of	4 feet	25° 34	.8'N		81°1	5.5' W		
1954 3/22	1255	C	0			22 (22 20						
	1355	S	0	-	_	22.6	32.20						
1955	1205	В	P	-	-	22.6	32.29						
2/9	1205	S	P	-	-	19.8	33.22						
2/24	0000	В	P	-	-	19.6	32.97						
2/24	0930	S	0	-	-	20.4	34.61						
3/31	1722	S	0	-	-	19.9	35.12						
10/27	1224	B S	0	-	_	20.0 26.5	35.16 33.48						
10/21	1664			-	-								
		В	0	-	-	25.5	34.22						

	DIALL		, 00 (Contro	-)								
		S							F	0	NO-		
Date	Time	0.	G. :	oreve	ρH	°C	Sal.	Cu.		4	NO ³	Car.	Pro.
		Б	C.	М.					In.	Tot.	2		
1950													
2 7	1444	S	0	-	-	23.7	33.13						
		3	0	-	-	24.0	33.10						
12 15	1205	S	0	-	-	23.5	35.16			A			
12/15	1235	S	0	-	-	23.7	12.35						
12 17	1140	S	0	-	-	24.2	35.32						
12/19	1207	S	0	-	-	24.0	35. 59						
12/28	1355	S	C	-	-	17.5	36.20						
1957		_											
1/11	1100	S	0	-	-	22.0	35.91						
2/12	1143	S	0	-	-	23.6	36. ±0						
		В	0	-	-	23.7	37.30						
	STATIC	ON C	01	Dep:	h of	3 feet	25° 3	31 N		81°	12 ' W		
1950													
7/25	1115	S	0	-	8.2	29.6	26.04	0.08					
7/31	1120	S	0	-	-	29.0	24.27	0.06					
8,15	1119	S	0	-	-	31.7	23.22	0.07					
8/28	1219	S	0	-	-	32.0	21.85	0.02					
9/5	1142	S	0	-	-	28.0	17.81	0.01					
9/26	1052	S	G	_	-	28.5	18.85	0.02					
10/1	1034	S	0	_	_	27.7	12.55	0.02					
10/9	1130	S	0	_	-	29.2	4.41	0.03					
10/24	1231	S	0	_	_	28.5	30.04	0.15					
11/21	1110	S	0	-	_	24.0	20.25	0.03					
12/10	1010	S	0	-	_	22.5	22.82	0.05					
1957								0,00					
1/11	1109	S	0	-	-	21.7	32.07	0.09					
2/19	1415	S	0	-	-	23.5	35.34	0.09					
5/8	1255	S	0	-	-	25.5	32.92	0.02					
	STATIC) : C	62	Den	h of	4 feet		4. 2 N		016	05.3' W	I	
1956	SIATIO)_ \ C	02	Debr	11 01	11661	23 3	7.4 =1		01	00.5. 4	_	
3 22	1245	S	0	-	8.1	19.8	34.17	0.02					
4/17	1442	S	G	-	8.0	26.0	35.05	0.05					
4/24	1315	S	0	-	-	26.8	35.83	0.08					
5/2	1223	S	0	-	_	28.3	35.02	0.00					
6/5	1330	S	0	_	8.1	29.1	32.10	0.11					
6/19	1205	S	0	_	8.0	29.2	33.12	0.03					
7/2	1210	S	0	_	8.1	29.0	30.13	0.06					
7/11	1157	S	0	-	8.3	30.0	27.55	0.05					
7/25	1120	S	0	-	8.0	29.4	21.68	0.05					
7/31	1136	S	0	_	-	32.0	17.87	0,05					
8/16	1132	S	0		_	31.5	11.22	0.04					
8/28	1209	S	0	-		33, 2	11.46	0.04					
9/5	1150	S	0	-	-	26.0	10.21	0.01					
9/3	1102	S	0	_	-		7.94						
	1043	S	0	_	-	28.1		0.06					
10/1	1040	2	U	-	-	28.2	3.25	0.00					

	JIMIN		30 (-/								
		S							F	0	NO-		
Date	Time	OI	G. 1	preve	РH	°C	Sal.	Cu.		÷	3	Car.	Pro.
		В	C.	M.					In.	Tot.	NO		
10/9	1140	S	0	_		29.5	2.35	0.02					
11/21	1117	S	0	_	_	26.0	8.30	0.19					
12/10	1020	S	0	-	-	23.0							
1957	1020	ی	U	-	~	23.0	10.44	0.07					
1/11	1117	S	0			21.5	23.00	0.11					
2/4	1144	S	0		-	24.5	28.93	0.03					
				-	_								
2/19	1422	S	0	-	-	24.3	32.72	0.20					
3/11	1208	S	0	-	-	20.0	30.60	0.10					
5/8	1303	S	0	-	-	20.0	28.71	0.00					
	STATIO	ON C	63	Dep	th of	ll feet	25° 2	181 N		81°	16.8' W		
1955		-											
4/6	1107	S	0	-	-	23.5	30.31						
		В	0	-	-	23.5	36.29						
7/26	1228	S	0	we	-	29.5	33.15						
		B	0	we	**	29.5	35.68						
8/22	1352	S	0	-	-	31.2	34.69						
		В	0		-	31.6	34.70						
12/21	1410	S	0	_	_	20.5	34.25						
		В	0			20.5	35.16						
1956		ע	0	-		20.5	55.10						
2/7	1515	S	0	-	-	22.9	34.91						
		B	0	um.	***	22.7	35.62						
3/5	1515	S	0	-	_	23.0	36.48						
		В	0	_	_	23.3	30.49						
1056	STATIC	ON C	64	Dept	h of	3 feet	25° 2	S. S' N		81°	10: W		
1956 3/22	1230	S	0		8.1	18.5	35.75	0.04					
4/17	1430			_									
		S	0	-	7.8	25.2	35.04	0.12					
5/2	1207	S	0	-		27.7	34.46	0.07					
6/5	1314	S	0	-	8.2	28.5	36.89	0.15					
6/19	1150	S	0	-	8.1	28.2	36.00	0.03					
7/2	1155	S	0	-	8.1	29.0	33.66	0.11					
7/11	1123	S	0	-	8.0	29.4	32.03	0.00					
7/25	1105	S	0	-	8.2	29.0	20.32	0.02					
7/31	1110	S	0	_	will the	30.0	28.28	0.03					
8/16	1115	S	0	uni	-	30.5	31.13	0.08					
8/28	1230	S	0	-		33.5	31.15	0.07					
9/5	1132	S	0	_	_	28.0	30.70	0.07					
9/26	1042	S	0		_	28.7	27.33	0.03					
10/9		S					27.80	0.10					
	1118		0	-	-	30.0							
10/24	1220	S	0	-	-	27.5	30.67	0.17					
11/21	1101	S	0	-	-	24.5	27.03	0.12					
12/10	1002	S	0	-		-	33.01	0.05					
1957 1/15	1441	S	0	_		23.0	35.38	0.00					
		S				24.8	32.80	0.05					
2/4	1127		0	-	-								
2/19	1407	S	0	-	-	24.0	35.13	0.12					
3/11	1153	S	0	-	-	19.0	34.82	0.25					

	STATIC	ON C	65	Dep	th of	38 feet	25°2	5' N		81°	45' W		
Date	Time	or B	G.	breve M.	рН	°C	Sal.	Cu.	In.	Tot.	NO - 3 NO 2	Car.	Pro.
1955 7/27	1157	S B	0	-	-	30.0	36.17 36.58						
10/0	1238	s B	0	-	-	29.3	36.51 36.49						
12/22 1956	0950	S B	0	-	-	21.0 21.0	36.39 36.40						
2/8	1052	S B	0	End max	-	20.2	36.47 36.49						
11/20	1435	S B	0	-	-	23.3 24.5	36.74 36.68						

		-	_				00.1/	
11/20	1435	S	0	-	-	23.3	36.74	
		В	0	-	-	24.5	36.68	
	STATIO	ON C	66	Dept	h of	31 feet	25° 23.5' N	81° 36' W
1955								
4/6	1247	S	0	-	-	23.6	36.08	
		В	0	-	-	23.6	36.08	
6/21	1610	S	0	***		29.5	36.82	
		В	0	-	-	29.0	36.82	
6/22	1202	S	0	-	-	30.0	37.12	
		В	0		-	29.9	37.21	
7/27	1117	S	0	-		29.9	36.40	
		В	0	-		29.8	36.49	
8/23	1241	S	0	_	-	31.3	36.71	
		В	0	-	-	31.5	36.73	
9/22	1107	S	0		-	29.5	36.42	
		В	0	***	-	29.2	36.42	
10/6	1200	S	0	***	-	29.0	36.33	
		В	0	-	-	28.9	36.18	
12/22	0915	S	0		-	20.7	36.23	
1956		В	0	-	-	20.6	36.23	
2/8	1009	S	0	-	**	20.7	36.41	
		В	0		-	20.8	36.46	
5/2	1138	S	0	~	-	25.9	37.19	
		В	0	_	_	26.3	37.08	
6/5	1132	S	0	-	-	29.0	37.48	
		В	P	_	_	28.5	37.49	
7/11	1111	S	0	**	_	30.0	38.05	
		В	0	-	_	29.9	37.88	
8/29	1135	S	0	_	_	31.2	37.80	
		В	0		_	31.5	37.90	
11/20	1513	S	0	-	-	23.3	36.95	
		В	0		-	23.3	36.85	
12/6	1152	S	0	646	_	20.0	37.00	
		В	0	-	-	20.1	36.91	

		S							P	0	NO ₃ -		
Date	Time	or	G. b	reve	рН	°C	Sal.	Cu.		4	NO	Car.	Pro.
		В	C.	M.					In.	Tot.	2		
1957													
1/16	1156	S	0	•••	•	21.2	37.40						
		В	0			21.0	37.37						
1/29	1138	S	0	-	-	21.2	36.81						
		В	0	•	_	21.2	36.73						
4/4	0852	S	0	_	_	24.0	37.11						
1/1	0032	В	0		-	23.9	36.42						
				-	_								
105/	STATIC	ON C	67	Dept	h of	21 feet	25° 25	5' N		81°	24.3'	N	
1956 3/6	0900	S	0			22.3	36.58						
3/0	0700			-	-								
~ / s		В	0	we		22.5	36.70						
5/1	1402	S	0	will	-	26.6	37.24						
		В	0	••	***	26.7	37.24						
6/4	1512	S	0		-	28.8	37.56						
		В	0	-	-	28.7	37.75						
7/10	1319	S	0		-	29.6	39.26						
		В	0	-	-	29.5	39.28						
8/28	1250	S	0	000	040	32.9	39.42						
		В	0	_	_	32.1	39.35						
9/18	1356	S	0	_	_	28.8	38.87						
//10	1330	В	0		_	29.0	38.77						
11/21	0820	S	0	_	_	22.7	36.73						
11/21	0040			-									
12/5	1707	В	0	_	-	22.8	36.61						
12/5	1707	S	0	_	-	19.5	36.74						
1957		В	0	-	000	19.4	36.74						
1/15	1429	S	0	•••	010	21.8	37.17						
		В	0		-	21.0	37.19						
1/28	1912	S	0	-	will	21.7	37.18						
		В	0	-	-	21.8	37.38						
2/11	1545	S	0		**	24.0	36.20						
		В	0	-	•	24.5	36.20						
3/20	1259	S	0	_	-	24.0	36.93						
		В	0	-	**	23.8	36.82						
4/3	1608	S	0	_		24.5	37.03						
-,0	2000	В	0	_		24.5	36.98						
				_									
1055	STATIC	ON C	68	Dept	th of	3 feet	25° 27	2.1' N	1	81°	08.41	<u>N</u>	
1955 4/19	1026	C	0			26.0	34.11						
1956	1020	S	0	-	-	20.0	7±. 11						
1/31	1327	S	0	-	-	21.6	29.90						
2/7	1318	S	0	_	-	24.0	32.13						
2/16	1312	S	0	_	-	24.0	31.83						
2/18	1419	S	0	000		24.2	33.16						
		S		-	-								
3/13	0955		0	_	-	25.0	33.07						
3/22	1220	S	0	-	-	19.5	35.23						

	D 171111	S							F	0	NO-		
Date	Time	or	G. I	oreve	рН	°C	Sal.	Cu.	•	4	3	Car.	Pro
		В	C.	M.	1				In.	Tot.	NO ₂	041	2 2 0
4/17	1426	S	0	-	-	25.0	36.03						
4/24	1247	S	0	_	-	25.0	36.46						
5/2	1158	S	0	-	-	27.6	34.57						
6/5	1303	S	0	-	-	27.6	35.91						
6/19	1140	S	0	***	~	28.2	36.90						
7/2	1145	S	0	_	-	29.0	36.79						
7/11	1130	S	0	_	-	29.8	35.05						
7/25	1055	S	0	-	-	29.8	34.70						
7/31	1100	S	0	-	-	30.0	36.86						
8/7	1033	S	0	-	-	30.5	37.85						
8/16	1106	S	0	-	•	30.5	36.53						
8/28	1242	S	0	-	-	32.0	35.45						
9/5	1125	S	0	-	-	28.5	36.50						
9/11	1228	S	0	-	-		32.95						
9/26	1029	S	0		-	28.5	33.17						
10/1	1014	S	0	•	_	28.2	30.92						
10/9	1105	S	0	-	0.0	29.2	30.47						
10/18	1145	S	0	***	-	25.5	31.76						
10/24	1210	S	0	-	**	27.0	32.45						
10/29	1138	S	0	_	-	25.6	28.34						
11/6	1056	S	0	_	**	24.0	30.84						
11/20	1740	S	0	_	~	24.5	30.31						
11/28	1115	S	0	~	***	18.6	31.77						
12/10 1957	0951	S	0	-	-	22.0	31.06						
1/21	1110	S	0	_	_	19.5	33.30						
2/4	1117	S	0	***	_	24.7	35.54						
2/19	1359	S	0	_	-	23.0	35.94						
2/24	1050	S	0	_	_	22.3	35.32						
3/11	1145	S	0	-	••	20.5	34.62						
3/19	1034	S	0	_	-	24.2	33.09						
3/26	0814	S	0	-	-	25.5	35.14						
4/2	1050	S	0	048	-	24.0	34.90						
4/10	0902	S	0	-	_	27.5	36.82						
4/15	1244	S	0	_	~	26.5	36.77						
4/24	1308	S	0	***	***	25.5							
5/2	1016	S	0	-	-	27.0	36.85						
5/8	1240	S	0	-	-	26.5	35.38						
5/15	1107	S	0	-	ons	28.0	35.53						
	STATIC	ON C	69	Dept	th of	19 feet	25° 1	9.7' N		81°	221 W		
1955	1100			250	0 0	10.0	25 /3	0.00					
2/24	1137	В	_	350	8.0	19.8	35.61	0.08					
3/15	1349	S	0	_	8.1	24.7	35.91	0.30					
		В	0	-	8.1	24.4	35.90	0.14					

	DIMIN										21.0		
		S							P	0	NO-		
Date	Time	or	G. br		рН	°C	Sal.	Cu.			NO ₂	Car.	Pro.
		В	C.	M.					In.	Tot.	2		
6/21	1712	S	0	~	8.1	29.2	37.34	0.80					
		В	0	***	8.1	29.5	37.30	0.10					
7/26	1311	S	0	-	-	30.0	37.03	0.12					
		В	0	***	**	29.5	36.35	0.13					
8/23	1136	S	0	ent	end	30.9	37.66	0.13					
·		В	0		**	31.0	37.70	0.04					
9/21	1414	S	0	ent		29.9	36.08	0.51					
,,		В	0	_	_	29.8	36.04	~	1.3	1.3	0.8	15.4	6.2
10/5	1035	S	0	and	_	28.7	35.05	0.02	-	1.1			
,-		В	0	-	est.	28.8	34.99	0.02	_	0.3			
10/26	1414	S	0	***	tea	26.7	36.33	0.27					
10/20		В	0	-	_	26. 1	36.74	0.70	0.2	0.3	0.6	1.5	0.3
12/22	0816	S	0		8.1	20.5	35.89	0.25	_	0.9			
	0010	В	0	-	8. 1	20.4	35.81	0.10	0.1	0.2	**	0.8	1.3
1956	0004	S			8.0	21.7	36.22	0.04	0.0	0.0		0.7	0.6
2/8	0904		0					0.04			_		
2 /5	1/10	В	0	-	8. 1	21.8	36. 25		0.2	0.2	-	1.0	0.5
3/5	1610	S	0	-	7.8	23.0	36.57	0.03	0.6	2.4	_	0.0	1.4
F / 3	1427	В	0	***	7.8	23.0	36.66	0.07	0.6	0 (0.9	1.2
5/1	1437	S	0	_	8.1	26.7	37.56	0.00	0.2	0.6	0.0	0.9	0.0
(1 4	35.40	В	0	***	8.1	26.9	37.46	0.11		0.0	0.2	0 5	0.1
6/4	1540	S	0	_	8.1	28.6	38.36	0.02	0.1	0.4	0.0	0.5	0.0
T / 10	1240	В	0	end	8.1	28.6	38.10	0.10	0.4	1.0	0.2	0.4	0.0
7/10	1349	S	0		8.3	30.0	39.54	0.08	0.3	~	0.5	0.6	0.1
0.400		В	0	-	8.3	29.9	39.59	0.03	0.1	0.9	0.2	0.7	0.4
8/28	1325	S	0	-	8.2	31.9	39.22	0.10	0.2	0.2	0.3	0.3	0.1
		В	0	•••	8.3	32.0	40.71	0.17	***	0.2	84	0.4	0.1
9/18	1423	S	0	-	8.3	28.0	39.23	0.05	0.1	0.3	0.4	1.5	0.1
		В	0	-	8.3	28.9	39.33	0.04	-	0.0	0.2	1.6	0.1
11/21	0755	S	0	•	8.2	22.6	36.76	0.07	-	0.5	0.2	1.5	0.2
		В	0	-	8.2	22.8	36.72	0.09	-	0.3	0.2	0.5	0.3
12/5	1730	S	0	-	-	19.2	36.95	0.17	84	0.3	1.2	1.4	0.2
1957		В	0	-	-	19.0	36.80	0.30	0.1	0.4	0.5	2.0	2.1
1/15	1455	S	0	-	8.2	21.6	37.12	0.04	~	0.9			
		В	0	-	8.2	21.0	37.08	0.06	-	0.8			
1/28	1943	S	0	-	8.0	22.0	37.25	-	0.0	0.7	0.3	1.9	0.4
		В	0	-	8.0	22.2	37.53	-	0.0	0.2	0.2	1.8	0.7
2/2	1609	S	0	-	8.1	24.2	36.20	0.15	0.4	0.5	1.0	1.6	0.5
		В	0	***	8.2	24.5	36.30	0.08	0.6	0.9	1.0	1.1	0.5
3/20	1325	S	0	-	8.1	24.0	36.82	0.18	-	0.5	1.0	2.3	0.2
		В	0	~	8.2	23.7	36.79	0.12	₩.	0.7	0.8	2.1	0.2
4/3	1645	S	0	-	~	24.7	37.04	0.14	0.2	0.5	3.4	1.8	0.8
		В	0	-		24.5	37.07	0.00	-	0.4	3.8	3.3	0.3

	STATIO	ON C	70	Dep	th of	35 feet	25° 1	5' N		81°	34¹ W		
		S							PO		NO		
Date	Time	or	G.	breve	рН	°C	Sal.	Cu.		4	NO NO	Car.	Pro.
		В	C.		•				Ín.	Tot.	_ 2	•	
1955													
6/22	1123	S	0	-	_	29.7	36.91						
	. 1	В	0		_	29.4	36.94						
7/27	1041	S	0	_	~	30.0	36.71						
– .		В	0			29.8	36.64						
9/22	1031	S	0	***	-	29.0	36.24						
71 ==		В	0	_	_	29.2	36.26						
10/6	1122	S	0	_	_	29.0	36.49						
	1100	В	0	_	_	28.8	36.49						
1956				_	_								
5/2	1055	S	0	-	-	26.0	37.37						
		В	0	-	-	26.1	37.37						
6/5	1055	S	0	-	-	28.5	37.45						
		В	0	-	-	28.5	37.46						
7/11	1030	S	0	-	-	29.9	37.76						
		В	0	-	-	29.9	37.93						
8/29	1055	S	0	-	_	31.5	38.07						
		В	0	-	_	31.5	37.99						
11/20	1550	S	0	_	_	23.1	36.75						
		В	0	-	_	23.5	36.47						
12/6	1113	S	0	_	_	20.2	36.95						
		В	0	_	_	20.3	36.90						
1957 1/16	1117	S	0			21.2	37.28						
1/10	1117			_	_								
1 /20	3057	В	0	-	-	21.0	37.27						
1/29	1057	S	0	-	***	21.5	37.29						
		В	0	-	_	21.5	37.11						
4/4	0808	S	0	-	-	24.1	36.20						
		В	0	•	-	24.0	36.41						
	STATIC	ON C	71	Dep	th of	8 feet	25° 1	9.7' N		81°	10.5"	N	
1955 2/24	1039	S	0	-	7.8	21.1	34.47	0.12					
2/24	1037	В	0					0.12					
2/15	1440			-									
3/15	1448	S	0	_	7.9	24.1	22.01	0.14					
(/21	1022	В	0	-	8.0	24.0		0.01					
6/21	1832	S	0	-	7.8	29.2	33.10	0.23					
		В	0	-	7.9	28.8	34.36	0.13					
8/22	1443	S	0	~	-	31.8	31.02	0.13					
		В	0	-	-	31.2	31.42	0.07					
10/5	1121	S	0	-	-	28.4	28.96	0.08					
		В	0	-	-	28.8	28.89	0.17	**	0.5			
10/27	1140	S	0	-	•	26.5	32.63	0.49		1.6			
		В	0	-	-	25.5	32.65	0.14		0.7	0.5	2.8	1.6
12/21	1547	S	0	-	7.9	20.5	32.79	0.08	0.2	0.3	-	1.2	3.1
		В	0	-	8.0	20.5	33.63	0.27	0.4	0.5	-	12.0	2.1

STATION C 71 (Cont'd)

		S	~ .				C 1		P	04	NO-		
Date	Time	or B	G. b	M.	рН	°C	Sal.	Cu.	In.	Tot.	NO ₂	Car.	Pro.
1956	0.020				_	21 4	35.05	0.03	0 0	0 1		1 2	2 1
2/8	0820	S	0	-	-	21.6	35.10	0.05	0.0	0.1	-	1.2	3. 1 3. 1
215	1657	B S	0	-	7.8	23.3	35.10	0.06	U. ∠ ⊶		-	7.0	2. 1
3/5	1001	B	0	-	7.8	23.4	35.08	0.06	_	1.0	**	1.6 0.6	3.4
5/1	1519	S		•	8.0	27.4	37.19	0.37	0.5	0.6	0.0	1.2	0.4
5/1	1519	B	0	-	8. 1	27.1	37.36	0.13	-	0.7	0.0	0.8	0.3
7/10	1434	S	0	-	0. 1	25.0	39.38	0.13	0.1	0.1	0.2	0.9	0.6
8/21	1302	S	0	_	-	31.0	38.15	0.03	-	0.5	-	1.7	0.9
9/5	0808	5	0		_	27.7	37.12	0.02	_	0.5	-	T . 1	0.7
9/26	0904	S	0	-	-	27.7	37.16	0.02					
11/21	0712	S	0	-	8.1	23.0	34.06	0.09	_	1.1	0.0	1.6	1.5
11,21	0112	В	0		8.1	23.0	34.69	0.05	***	0.3	0.3	0.6	1.0
12/5	1808	S	0	_	-	19.2	34.15	0.17	0.2	1.5	0.8	2.7	1.6
	1000	В	0	_	_	19.0	35.84	0.23	0.8	0.8	1.0	1.4	0.8
1957 1/15	1458	S	0	-	_	22.5	34.97	0.10	14	0.9			
1/29	0748	S	0		7.9	22.7	35.82	**	0.8	1.2	0.5	3.0	1.5
1,0,	0,10	В	0	_	7.9	22.7	35.98	_	_	4.8	0.7	1.2	1.2
2/11	1700	S	0	_	8.1	24.7	35.10	0.17	0.3	0.7	0.6	1.7	0.7
_,		В	0	_	8.1	25.0	35.30	0.20	-	1.5	1.1	1.5	1.5
3/20	1356	S	0	-	-	25.7	35.81	0.20	-	0.4	1.0	2.2	2.1
4/4	0545	S	0	-	ana .	24.0	38.07	0.11	0.0	0.5	0.8	1.9	0.6
		В	0	-	en-	24.0	38.18	0.05	0.0	0.4	0.7	1.3	1.0
	STATIC	ON C	72	Dept	h of	8 feet	25° 1	9.41 N		81°	091 W		
1955	1012				-	24.0	22.70						
3/15	1812	S	0	-	-	24.0	33.78						
6/21	1842	S	0	-	-	30.1	33.62						
1956 2/8	0712	S	0	_	_	23.11	30.91						
3/6	0652	S	0	-	_	23.11	33.42						
5/0	0002	В	0	_	_	23.0	34.43						
11/21	0703	S	0	_	_	23.0	33.44						
,-1	3.00	В	0	-	••	23.0	33.83						
12/6	0640	S	0	-	**	18.4							
		В	0	-	-	18.5	33.89						

	STATIO	ON E) 1	Dep	th of	3 feet	25° 1	91 N		81°	04.31 W	7	
Date	Time	S	G. b:	reve	pН	°C	Sal.	Cu.	P	04	NO-	Car.	Pro.
		В	C.	M.					In.	Tot.	NO ₂		
1950	1210	S	0	_	8.1	19.5	33.59	0.05					
4/17	1412	S	0	***	7.4	25.3	35.95	0.00					
4/24	1239	S	0	_	**	25.8	36.28	0.09					
5/2	1152	S	0	_		28.2	34.97	0.00					
0/5	1255	S	0	_	7.8	30.0	36.70	0.10					
6/19	1130	S	0	_	8.0	28.0	37.02	0.04					
7/2	1140	S	0	-	8.2	29.5	37.48	0.14					
7/11	1136	S	0	_	7.9	30.2	36.63	0.08					
7/25	1050	S	0	-	8.1	28.3	34.78	0.01					
7/31	1050	S	0	-	~	30.5	37.33	0.02					
8/15	1058	S	0	***	-	32.0	36.95	0.08					
8/28	1249	S	0	***	***	32.1	37.07	0.04					
9/5	1117	S	0	-	100	29.0	34.79	0.00					
10/1	1005	S	0	-	***	28.4	29.94	0.03					
10/9	1059	S	0	-	***	29.5	30.71	0.02					
10/2=	1202	S	0	~	-	27.2	30.72	0.07					
957	1505	_	0			22.0		0 00					
1/15	1507	S	0	140	-	23.0	33.85	0.00					
2/4	1109	S	0	**	***	25.0 24.3	34.70	0.06					
2/19	1352		0	-	-					0.1.0			
1055	STATIO	ON I	2	Dep	th of	12 feet	25 1	3.51 N	_	81	15' W		
1955 3/15	1523	S	0	_		24.8	35.35						
3/13	1000	В	0			24.7	35.21						
6/22	0624	S	0		_	28.6	37.59						
0,23	0021	В	0	140	_	28.6	37.54						
7/26	1405	S	0	***	-	29.0	36.06						
.,		В	0	-	-	29.3	36.13						
8/22	1521	S	0	_	***	30.9	37.65						
·		В	0	_	-	31.0	37.59						
9/21	1457	S	0	_		29.5	36.96						
		В	0	_	**	30.0	36.94						
10/5	1153	S	0	100	-	29.0	34.56						
		В	0	***	140	28.9	34.51						
10/26	1535	S	0	***	-	26.1	32.00						
		3	0	100	***	25.2	33.49						
12/21	1515	S	0	100	-	20.5	35.23						
1956		B	0	-	-	20.6	35.21						
5/1	1553	S	0	+40	-	27.0	38.17						
		B	0	-	1000	27.2	38.23						
6/4	1623	S	0	-	-	28.5	36.37						
		В	0	-		28.0	36.85						
7/10	1430	S	0	-	-	30.0	39.75						
		В	0	-	-	30.0	39.70						

		S							PO)	NO-		
Date	Time	or	G. 5:	eve	Hq	°C	Sal.	Cu.	7 (4		C==	Pro.
200	1 11110	В	C.	N.		Ü	041	0	Īn.	To:	NO 2	Cal.	110.
8/28	1408	S	0	-	-	31.4	±0.76			4 0 0 0			
-,		В	0	_	**	31.5	40.82						
9/18	1503	S	0	_	_	29.0	37, 47						
		В	0	_	-	29.2	37.83						
11/20	1830	S	0	-	-	23.5	30.57						
		В	0	_	-	23.0	30.50						
12/ó	0845	S	0	-	-	19.0	30.03						
1957		В	0	-	-	19.2	30.4c						
1/15	1540	S	0	-	-	21.0	37.17						
		B	0	-	-	21.0	37.33						
1/29	0820	S	0	-	-	23.0	37.23						
		В	0	-	-	23.0	37.25						
2/12	0845	S	0	-	-	24.0	36.20						
		В	0	-	-	24.0	36.20						
3/20	1409	S	0	~	-	24.9	37.87						
		В	P	-	-	24.9	37.00						
4/4	0623	S	0	-	-	24.1	38.01						
		В	0	-	-	24.2	37.98						
	STATIC	ON D	3	Deb.	th of	Sfeet	25° 1	1. 11 N		80 =	54.31 V	ř	
1955 5/17	1520	S	0	_	8.2	31.6	21.47	0.85					
9/1	1545	S	0	_	8.2	31.8	10.82	-	_	5.1			
12/21	1530	S	0	_	7.7	22.0	14.00	0.07	1.9	2.2	_	4.3	7.0
1956		_							/			-, -	
1/25	1700	S	0	-	-	25.0	15.25	0.04					
2/7	1400	S	0	-	-	-	16.03	0.12	0.0	-	-	-	15.5
3/5	1735	S	0	-	S. 4	28.5	18.40	0.10	-	2.7	-	-	11.0
4/9	1636	S	0	-	-	21.9	23.88	0.10		1.4	-	14.0	15.0
5/1	1530	S	0	-	8.0	33.0	28.14	0.10	1.2	2.9	0.4	15.1	3.7
6/5	1532	S	0	-	S. 0	29.2	31.40	0.00	1. ó	1.7	0.0	1.0	2.8
7/2	1125	S	0	-	S. 2	30.S	31.93	0.08					
7/10	1500	S	0	-	-	25.5	33.41	0.27	0.1	0.3	0.5	3.9	2.0
7/31	1035	S	0	-	-	30.0	33.79	0.01					
8/16	1045	S	0	-	-	30.5	33.80	0.04					
S/21	1325	S	0	-	-	31.5	33.05		0.2	0.2	0.2	2.3	1.0
9/5	1105	S	0	~	-	28.0	32.47	0.01					
9/26	1011	S	0	~	-	28.2	30.50	0.03					
10/1	0950	S	0	-	-	28.5	28.10	0.01					
10/9	1045	S	0	-	-	29.4	28.30	0.03					
10/24	1140 1620	S S	0	-	-	27.2	20.00	0.10	0.1	0 0	0.0	2 0	-
11/20 12/5		S	0	-	-	25.0	26.40	0.29		0.3	0.9	3.8	3.5
1957 1/15	1536			-	-	21.0	24.81	0.28	0.5	0.5	0.8	2.7	3.7
	1525	S	0	-	-	24.0	2 . 2 !	0 2	- 7	0.5	0. 3	2 -	2 2
1/28 2/11	1709 1030	S S	0	_	_	2 ₀ .0 25.0	20.24	0.20	0.1	0.7	0.1	2.5	2.2
2/11	2000						0.101	0.15		4.0	0.2		2.0

		S							P	O_4	NO-		
Date	TT :		G. br		n LI	°C	Sal.	Cu.	1	4	NO-	Car.	Dwo
Date	Time	or			рн		Jai.	_	Tan	Tot.	NO ₂	Car.	Pro.
2/10	1242	_B	C.	M.		24 5	27 22		In.	Tot.			
2/19	1342	S	0	_	-	24.5	27.22	0.07					
3/11	1128	S	0	-		19.5	26.55	0.16				- 4	
3/20	1445	S	0	-	-	27.2	26.85	0.04	-	0.8	0.8	5.4	4.4
4/3	1600	S	0	-	040	29.0	28.37	_	**	1.1	0.9	3.8	4.3
5/8	1221	S	0	-	049	26.0	31.16	0.05					
	STATIC	ON E	4	Dep	th of	19 feet	25° 0	7.51 N		81°	21¹ W		
1955	1550	S	0	_	8.1	21.3	36.23	0.18	_ 1	1.0		0.5	1.0
12/21	1550	В	0		8.1	20.9	36.23	0.13		0.6	_	0.7	0.9
1956				_									
5/2	0942	S	0	-	8.3	26.2	37.24	0.18	0.1	0.4	0.0	0.4	0.1
		В	0	-	8.3	26.6	37.90	0.16	0.3	0.5	1.8	3.6	
6/5	0944	S	0	-	8.2	28.3	38.67	0.10	0.3	0.3	0.4	0.8	0.0
		В	0	-	8.3	28.3	38.52	0.11	-	0.6	0.0	1.2	0.3
7/11	0932	S	0	-	8.1	29.6	39.35	0.03	0.2	2.3	1.3	0.6	0.0
		В	0	-	8.2	30.0	39.47	0.04	0.2	-	0.4	0.5	0.0
8/28	1445	S	0	-	8.1	31.4	40.12	0.03					
		В	0	-	8.2	31.5	40.13	0.07					
11/20	1645	S	0	_	8.2	23.0	37.82	0.16	-	0.1	0.7	1.1	0.5
		В	0	-	8.3	23.5	37.33	0.01	_	0.2	0.1	1.5	0.4
12/6	1012	S	0	-	_	19.4	36.80	0.24		0.8	0.8	1.2	1.5
		В	0		_	19.9	36.77	0.31	0.4	1.1	0.2	1.2	0.2
1957 1/16	1017	S	0	_	8.1	21.4	37.37	0.21		0.7			
1/10	1017	В	0		8. 2	21.5	37.29	0.00	_	0.7			
1 /20	0950	S	0	-							0 4	0.2	1.1
1/29	0930			_	8.2	22.5	37. 19	-	0.0	0.1	0.4		0.0
2/12	0020	В	0	**	8.2	22.5	37.23	0.36	0.0	- 0	0.3	0.9	
2/12	0820	S	0	_	8.1	24.0	36.40	0.26	- 1	0.8	0.7	1.5	0.4
	_ /	В	0	-	8.1	24.0	36.40	0.14	0.4	0.8	1.0	0.8	0.6
4/4	0620	S	0	-	***	24.1	37.38	0.04	•	0.4	2.4	2.0	0.1
		В	0	-	***	24.1	37.57	0.02	0.6	1.4	2.1	1.6	0.7
	STATIO	I NC	5	Dep	th of	ll feet	25° 0	3.5 N		81°	10' W		
1955		_											
6/22	0718	S	0	**	-	29.2	37.01	0.14					
			0	-	8.0	29.4							
7/26	1541	S	0	-	000	30.0		0.16					
		В	0	••	-	29.9		0.10					
8/22	1627	S	0	-	***	30.9	37.66	0.22					
		В	0	-	-	30.9	-	0.01					
9/21	1540	S	0	-	-	29.3	37.86	0.10	0.4	0.6	1.2	0.3	0.7
		В	0	_	-	30.0	36.08	0.04	0.4	0.4	1.9	0.5	0.9
10/5	1317	S	0	-	-	28.4	37.99	0.07	-	0.1			
		В	0	-		28.9	37.90	0.02	_	0.6			
10/26	1630	S	0	-	-	25.3	36.49	-	0.6	0.7	1.1		
		В	0	-	_	25.3	36.53	0.10	_	_		12.0	2.9
12/21	1639	S	0	_	_	-	36.31	0.12	-	0.1	-	1.8	5.6
		В	0		_		36.31		0.5	0.7	-	1.3	0.8

		S							P	0	NO-		
Date	Time	or	G. b:		рН	°C	Sal.	Cu.			NO ₂	Car.	Pro.
105/		_3	C.	M.					In.	Tot.	2		
1956 5/1	1644	S	0	_	8.1	27.0	38.62	0.00	~	1.3	0.2	2.1	0.1
3/1	1011	В	0	_	8.1	27.0	38.33	0.19	0.5	1.0	0.5	3.8	
6/4	1724	S	0	_	8.1	29.0	39.30	0.11	0.0	0.7	0.0	0.5	0.1
-, -		В	0	_	8.1	28.5	39.02	0.05	0.3	0.0	0.1	1.9	0.2
7/10	1526	S	0	_	8.3	29.9	41.10	0.00	0.1	0.2	0.5	1.0	0.2
		В	0	_	8.3	30.2	41.06	0.06	0.0	0.3	0.9	1.1	0.2
8/28	1525	S	0	-	8.3	31.9	41.85	0.10	-	0.3	1.8	1.2	0.3
		В	0	-	8.3	31.6	41.72	0.01	0.5	0.5	0.2	0.8	0.1
9/18	1552	S	0	-	8.2	28.0	39.84	0.07	_	0.4	1.2	1.9	0.3
		В	0	-	8.2	28.5	39.75	0.04	0, 4	0.6	0.2	2.3	0.5
11/20	1740	S	0	-	8.2	23.0	30.32	0.02	~	0.1	0.1	1.1	0.7
		В	0	-	8.2	23.0	30.42	0.39	0.2	0.3	0.3	2.2	0.5
12/6	0930	S	0	-	8.1	19.4	37.04	0.14	0.2	0.8	1.0	1.8	0.8
1957		В	0	-	8.0	19.8	37.20	0.17	-	0.5	0.9	1.2	0.0
1/15	1625	S	0	-	8.1	21.6	37.18	0.02	-	0.7			
		В	0	-	8.1	21.6	37.17	0.01	-	0.6			
1/29	0908	S	0	-	8.1	23.5	36.13	-	0.1	0.3	0.1	1.1	0.3
- 4		В	0	-	8.1	23.5	37.12	-	0.3	0.4	0.3	2.8	0.0
2/12	0928	S	0	-	8.1	24.0	36.60	0.18	0.4	1.2	0.0	1.3	0.7
	/	В	0	-	8.1	24.0	37.56	0.20	0.0	0.9	0.8	1.3	0.8
3/20	1456	S	0	_	8.2	25.0	37.63	0.13	0.3	0.4	1.5	2.3	0.0
		В	0	-	8.2	25.0	37.79	0.00	0.0	0.4	1.3	2.5	0.9
1955	STATIO	ON D	6	Dep	th of	50 feet	25° 0	7.41 N		81°	03.5 V	<u></u>	
3/17	1320	S	0	_	7.9	29.2	40.25	0.08					
5/17	1445	S	0	_	8.1	31.4	43.16	0.47					
9/1	1500	S	0	-	8.0	33.0	39.00	0.10	_	1.5			
12/21	1440	S	0	-	8.4	22.8	36.15	0.24					
1956	2 / 4 0	~				0/ 0							
1/25	1640	S	0	-	-	26.0	34.42	0.04					4 7
2/7	1315	S	0	-	8.1	26.0	37.61	0.04	1 4	2 2	resp.	2 2	4.7
3/5	1645	S	0	-	8.4	27.8	39.34	0.06	1.4	3.3	_	3.2	8.0
3/22	1200 1554	S S	0	_	8.3	18.5	41.02 55.61	0.04	0 3	0.9			
5/1	1500	S	0	_	8.0	23.0	47.02	0.04		1.3	6.3	3.8	0.9
6/5	1500	S	0	_	8.1	29.4	55.60	0.13		1.5	0.3	0.7	1.0
6/19	0950	S	0	_	8.0	28.4	47.50	0.13	0.5	1. 0	0.5	0. 1	1.0
7/2	1110	S	0	_	8.0	29.5	60.00	0.20					
7/10	1515	S	0	_	-	32.5	61.00	0.21	-	0.3	0.3	8.9	1.2
7/31	1020	S	0	_	_	30.5	03.00	0.14					
8/21	1340	S	0	_	_	33.2	53.00	0.02	_	0.4	0.4	9.5	0.8
9/5	1050	S	0	_	_	28.5		0.02		•			
9/26	0944	S	0	_	_	27.8	43.05	0.04					
10/1	0933	S	0	_	_	28.4	42.84	0.03					

	DIATI	S	- 10						PO)	NO-		
Date	Time		C	270110	n LI	°C	Sal.	Cu.	P(4	3	Car	Pro.
Date	Time	or	C.	oreve	hu	Ç	Dal.	Оц.	In.	Tot.	NO 2	Car.	Fro.
10/9	1027	B S	0	M.		29.1	42.42	0.02	1110	101.			
10/24	1135	S	0	-	-	27.5	39.26	0.12					
10/29	1103	S	0	-	_	25.2	38.71	0.11					
11/20	1639	S	0	-	_	24.2	34.92	0.04	0.5	0.8	2.6	1.5	1.6
12/5	1604	S	0	_	_	21.2	36.59	0.20		_	1.0	3.8	1.7
1957	2002								•				
1/15	1549	S	0	-	-	24.0	-	0.04	-	0.5			
1/28	1735	S	0	_	-	25.3	38.28	0.05	0.2	0.6	0.4	2.1	1.4
2/4	1034	S	0	-	-	24.4	37.57	0.00					
2/11	1605	S	0	-	_	26.5	38,56	0.08	0.1	0.6	1.7	1.5	1.1
2/19	1210	S	0	-	-	23.5	36.72	0.06					
3/20	1432	S	0	-	_	27.0	38.64	0.16	0.6	0.8	0.3	1.9	1.5
4/3	1500	S	0	-	_	26.0	38.84	-	0.9	1.4	3.9	1.5	1.7
4/24	1144	S	0	-	_	26.0	-	0.10					
	STATI	ONIT	7	Den	th of	2 feet	27° 0	7.11 N		80 °	57.91	N	
1955			_	Вер			-		-	-		-	
4/19	0954	S	0	-	-	26.5	42.58						
8/3	1555	S	0	-	-	31.1	37.74						
1956 1/31	1300	S	0	-	~	22.5	35,21						
2/16	1237	S	0	_	_	24.1	35.99						
2/28	1348	S	0	_	_	26.5	37.28						
3/22	1250	S	0	_	-	_	40.32						
4/17	1348	S	0	_	_	25.5	41.13						
4/24	1216	S	0	_	-	27.9	41.13						
5/2	1134	S	0	_	_	27.3	33.50						
6/5	1233	S	0	_	_	28.8	52.00						
6/19	1110	S	0	_	-	28.0	59.00						
7/2	1105	S	0	_	_	29.7	52.00						
7/25	1023	S	0	_	_	29.1	61.00						
7/31	1014	S	0	_	_	30.5	55.00						
8/7	0957	S	0	_	-	31.2	54.50						
8/16	1027	S	0	_	_	30.5	47.80						
9/5	1045	S	0	_	-	28.0							
9/11	1147	S	0	_	_	27.6	43.24						
9/26		S	0	_	_	27.8	43.13						
10/1	0926	S	0	_	_	28.4	42.73						
10/1	1020	S	0	_	_	29.0	42.55						
10/9	1105	S	0	_	_	26.5	41.46						
10/10		S	0	-	_	27.5	39.01						
11/6	1019	S	0	_	_	23.0	38.00						
11/20	1700	S	0	_	_	25.5	36.92						
11/28		S	0	-	_	17.5	35.85						
12/5	1550	S	0	_	-	20.6	36.40						
2010	2000	_											

											210		
		S							Р	0	NO -	_	_
Date	Time	or		reve	pН	°C	Sal.	Cu.			NO	Car.	Pro.
1055		В	С.	M.					In.	Tot.	2		
1957	1022	C	0			10.0	2/ 40						
1/21	1032	S	0	_	-	19.0	36.40						
1/28	1726	S	0	_	-	25.5	39.01						
2/4	1050	S	0	_	-	24.5	42.11						
2/19	1331	S	0	-	-	23.5	39.04						
2/24	1014	S	0	_	-	21.5	40.05						
3/11	1030	S	0	-	-	18.0	37.93						
3/19	1013	S	0	-	_	24.7	38.16						
4/2	1015	S	0	_	_	24.0	40.58						
4/10	0831	S	0	_	_	27.2	42.73						
4/15	1130	S	0	_	_	25.8	40.13						
4/24	1203	S	0			26.2	10.15						
5/2	0945	S	0	_	_	27.0	44.90						
				-	_								
5/8	1127	S	0		-	25.5	45.02						
5/15	1012	S	0	-	•	28.3							
	STATIC	ON E	8 (Dept	th of	2 feet	25° 07	.61 N		80°	51.31 W		
1955										-		-	
4/19	1005	S	0	_	_	24.5	40.26						
1956													
2/16	1228	S	0	-	-	23.6	35.71						
2/28	1343	S	0	_	-	26.0	37.86						
3/22	1145	S	0	•	-	17.2	41.62						
4/17	1357	S	0	_	-	26.2	42.54						
4/24	1223	S	0	_	-	26.0	41.60						
5/2	1139	S	0	_	-	27.4	51.58						
6/5	1238	S	0	-	_	28.8	54.40						
6/19	1115	S	0		_	28.0	57.00						
7/2	1115	s	0		_	30.0	56.00						
7/25	1035	S	0	_	-	28.9							
				-	-		70.00						
7/31	1027	S	0	-	-	30.5	62.00						
8/7	1010	S	0	_	-	31.0	59.50						
8/16	1036	S	0	-	-	30.0	51.50						
9/5	1055	S	0	-	-	27.5	49.50						
9/11	1158	S	0	-	-	27.5	44.40						
9/26	1002	S	0	-	-	28.0	42.44						
10/1	0940	S	0	-	-	28.0	42.62						
10/9	1033	S	0	-	_	28.3	42.63						
10/18	1114	S	0	_	_	26.5	41.88						
10/24	1140	S	0	-	_	28.2	41.92						
10/29	1108	S	0	-	_	25.5	38.06						
11/6	1030	S	0	_	_	23.0	37.94						
11/20	1706	S	0	_	_	25.0	36.14						
11/28		S		_	-								
	1050		0	-	_	15.0	36.15						
12/5	1545	S	0	-	-	22.2	36.96						

	STATIC	D NC	8 (C	ont'd)									
		S							P	04	NO-		
Date	Time	or	G. b	oreve	рН	°C	Sal.	Cu.		4	3	Car.	Pro.
		В	C.	М.	1				In.	Tot.	NO ₂	041.	110,
1957													
1/15	1538	S	0	_	_	23.0							
1/21	1038	S	0	_	_	18.8	36.10						
1/28	1720	S	0	_	_	-	40.64						
2/19	1336	S	0	_	_	24.6	39.85						
2/24	1021	S	0			21.2	42.88						
3/11	1125	S	0	_	_	17.5	38.72						
3/19	1018	S		_	-								
			0	-	_	24.5	38.54						
3/26	0840	S	0	-	-	23.5	39.66						
4/2	1021	S	0	-	-	24.0	41.53						
4/10	0837	S	0	-	-	25.5	45.25						
4/15	1218	S	0	_	-	25.0	41.44						
4/24	1245	S	0	-	-	26.5							
5/2	0951	S	0	-	-	27.5	48.00						
5/8	1214	S	0	-	-	25.2							
5/15	1040	S	0	-	-	28.0							
	STATIC	רד זאר	0	Dani	h of	4 feet	25° 03	2 01 7	T	80.0	59' W		
1955	JIAIIC			Depi	.11 01	7 1001	25 0.	J. / I.			37 11		
4/19	0935	S	0	_	_	25.2	39.51						
1956													
1/31	1252	S	0	-	-	23.0	35.54						
2/7	1250	S	0		-	24.2	36.25						
2/16	1222	S	0	-	-	24.2	35.73						
2/28	1332	S	0	-	_	26.0	37.50						
3/22		S	0	-	-	18.2	39.88						
4/17	1336	S	0	-		27.0	40.29						
4/24	1208	S	0	_	-	27.0	39.63						
5/2	1126	S	0	_	_	27.6	41.93						
6/5	1228	S	0	_	-	28.7	48.50						
6/19	1100	S	0	_	_	28.0	47.50						
7/2	1055	S	0	_	_	29.7	50.00						
7/25	1015	S	0	_	-	28.6	49.00						
7/31		S	0	_		30.0							
8/7	0950	S	0	_	_	31.1	53.70						
8/16	1020	S	0	_	_	31.2	48.50						
9/5	1039	S	0	_	_	27.5	45.20						
9/11	1140	S	0	_	-	27.1	44.00						
				-	_								
9/26	0935	S	0	_	***	27 7	43.57						
10/1	0921	S	0	-		27.7	42, 43						
10/9	1015	S	0	~	-	28.6	32.81						
10/18	1057	S	0		-	26.5	41.04						
10/24	1125	S	0	-	-	27.5	40.84						
10/29	1044	S	0		-	25.0	39.16						
11/6	1015	S	0	-		23.2	36.55						
11/20	1653	S	0	_	-	24.7	35.33						

	DIMIN) (0	om u	1								
		S							I	20	NO-		
Date	Time	or	G. b	reve	рН	°C	Sal.	Cu.		4	3	C 2 2	Pro.
		В	C.	М.	-				In.	Tot.	NO 2	Cal.	PIO.
11/28	1039	S	0	-	-	15.0	36.37						
12/5	1610	S	0	_	_	22.4	36.24						
1957													
1/15	1555	S	0	~~	-	22.6							
1/21	1025	S	0	-	-	18.5	36.60						
2/4	1042	S	0	-	_	24.8	38.08						
2/19	1324	S	0	-	***	24.2	38.00						
2/24	0954	S	0	-	-	21.5	38.42						
3/11	1020	S	0	_	-	17.5	38.27						
3/19	1002	S	0		***	24.5	37.92						
4/10	0825	S	0	-	•	26.5	40.43						
4/15	1123	S	0	-	-	25.0	40.77						
4/24	1157	S	0	_	-	26.0							
5/2	0940	S	0	-	-	27.3	45.30						
5/8	1121	S	0		_	25.5	43.32						
5/15	1006	S	0	-	-	28.8							
19,5,5	STATIC	N D	10	Dent	h of	13 feet	24° 58	8. 51 N		810	17 ¹ W		
6/22	0908	S	0			29.5	37.19	J. J 11		01	T 1 44		
		В	0	Mag.	_	29.5	37.19						
7/27	0821	S	0	_	_	29.4	37.52						
1,21	0021	В	0	_	_	29.4	37. 47						
8/23	0930	S	0	_	_	30.2	37.50						
0/23	0 / 3 0	В	0	_	_	30.4	37.56						
9/22	0838	S	0	_		28.9	37.36						
//22	0030	В	0	-	-	28.8	31.30						
10/6	0905	S	0	-	98	28.4	20 61						
10/0	0 / 0 3	В	0	-	_		38.64						
10/27	0926	S	0	-	~	28.1 25.5	38.66						
	0720	В	0	-	-	25. 4	38.42						
1956	0054			-	₩		38.42						
5/2	0854	S	0	-	-	26.7	37.89						
(/=	0050	В	0		-	26.8	37.90						
6/5	0858	S	0		-	28.5	39.62						
7/11	0040	В	0	980	-	28.4	39.66						
7/11	0843	S	0	-	-	29.6	38.93						
0./20	0041	В	0	-	-	29.9	38.92						
8/29	0841	S	0	_	-	31.0	39.35						
1957		В	0	- Page	-	31.0	39.33						
1/16	0932	S	0	-	-	21.7	37.56						
		В	0	-	-	21.5	37.57						
3/21	0844	S	0	**	-	24.8	37.70						
		В	0	to to	-	24.8	37.70						

STATION D 11				Depth of 9 feet			24° 59.2' N			81° 00.7' W				
Date	Time	S or B	G. 1	oreve M.	рН	°C	Sal.	Cu.	In.	Tot.	NO - NO ³ 2	Car.	Pro.	
1955		В		101.						101.				
6/22	0802	S	0	-	***	30.1	36.96							
		В	0	-	-	30.1	37.00							
7/26	1620	S	0	-	000	30.5	38.40							
		В	0	-	-	30.5	38.44							
9/21	1626	S	0	-	-	30.3	37.27							
		В	0	-	040	29.9	37.27							
10/5	1354	S	0	~		29.0	39.13							
1956		В	0	_		29.0	39.16							
1/31	1245	S	0	048	-	22.5	35.98 35.70							
2/7	1245	S	0	-	-	24.0 23.5	36.14							
2/16	1210	S	0	***	040	25.4	36.98							
2/28	1324	S S	0	_		18.4	37.47							
3/22	1130 1223	S	0	_	_	25.0	38.94							
4/17 4/24	1017	S	0	_		25.0	38.88							
5/2	1122	S	0	-	_	27.9	43.07							
6/19	1055	S	0	_	_	28.0	43.60							
7/2	1050	S	0	_	_	29.6	42.27							
7/25	1010	S	0	_	••	28.8	49.00							
7/31	1000	S	0	_	_	30.0	48.00							
8/7	0842	S	0	_	-	30.5	47.20							
8/16	1014	S	0	_	•	31.0	43.99							
9/5	1031	S	0	-	-	28.0	42.68							
9/11	1132	S	0	_	-	28.0	42.19							
9/26	0930	S	0	-	_	27.7	39.92							
10/1	0915	S	0	-	-	28.0	40.18							
10/9	1008	S	0	-	040	28.5	39.41							
10/18	1050	S	0	-	-	25.5	40.28							
10/24		S	0	-		27.2	38.73							
11/6	1008	S	0	-	-	23.7	37.95							
	1647	S		-	-	24.2	37.19							
11/28		S	0	_	-	17.5	35.31							
12/5 1957	1618	S	0	-	_	21.5	36.87							
1/15	1603	S	0	_	_	22.5								
1/21		S	0	-	_	19.0	36.20							
2/19		S	0	040		24.0	37.38							
2/24		S	0	-	-	22.2	39.57							
3/11		S	0	_	-	19.0	37.46							
3/19		S	0		-	25.0	38.53							
4/2		S		-	-	24.0	39.18							
4/10	0819	S		-	-	27.5	41.32							
4/15		S		-	-	25.2	40.16							
4/24		S		-	***	26.0	42.25							
5/8		S		-	-	26.0	43.35							
5/1	5 1000	S	0	-	_	28.5	39.98							

STATION D 12 Depth of	of 10 feet	24° 52' N	81° 06¹ W
-----------------------	------------	-----------	-----------

		S							P	0	NO ₃ -		
Date	Time	or	G.	breve	рН	°C	Sal.	Cu.		4	NO	Car.	Pro.
		В	C.		1				In.	Tot.	2	Oar.	1 10.
1955													
8/22	1729	S	0	-	-	30.9	38.37						
		В	0	-	•	31.0	38.39						
9/21	1704	S	0	-	-	29.6							
		В	0	-	-	30.0	39.14						
10/5	1431	S	0		***	28.5	35.35						
		В	0	-	-	28.3	35.26						
10/26	1719	S	0	-	-	26.0	38.71						
1956		В	0	-	-	26.2	38.69						
5/1	1738	S	0	-	-	27.1	38.76						
(14	1012	В	0	_	-	27.1	38.60						
6/4	1813	S	0	-	-	28.8	39.92						
7/10	1617	B S	0	-	-	28.5	39.86						
7/10	1617		0	-	-	30.2	41.83						
8/28	1613	B S	0	-		30.5	41.83 42.67						
	1013	В	0	_	_	32.0							
1957 1/15	1720	S	0	-	_	32.3 21.9	43.40						
1/15	1120	B	0	_	-	22.0	37.61 37.63						
3/20	1549	S	0	-	-	24.8	37.82						
3/20	1347	В	0	-	***	24.8	37.94						
		ט	•	_	_								
	am a max		2.0	-									
1055	STATIO	DN D	13	Dept	th of	6 feet	24° 43	3.7' N		81° 0	7.5' W	_	
1955 7/26		-		Dept	th of		24° 43	3.7' N	_	81° (07.5' W	_	
1955 7/26	1737	ON D S B	0 0	Dept	th of	30.0		3.7' N		81° ()7.5' W	_	
		S	0	-	th of - -	30.0	24° 43 36.76	3.7' N	_	81° (07.5' W	_	
7/26	1737	S B	0	-	th of	30.0		3.7' N		81° 0)7.5'W	_	
7/26	1737	S B	0 0	-	th of	30.0 30.0 29.9	36.76	3.7' N		81° 0	07.5' W	_	
7/26 8/23	1737 0826	S B S	0 0 0 0	-	- - - -	30.0 30.0 29.9 29.8	36.76 37.72	3.7' N		81° ()7.5' W	_	
7/26 8/23	1737 0826	S B S B	0 0 0 0	-	-	30.0 30.0 29.9 29.8 29.5	36.76 37.72 36.76	3.7' N		81° (07.5' W	_	
7/26 8/23 9/21	1737 0826 1540	S B S B B	0 0 0 0 0	-	-	30.0 30.0 29.9 29.8 29.5 29.9	36.76 37.72 36.76 36.85	3.7' N		81° (07.5' W		
7/26 8/23 9/21 10/5 10/27 1956	1737 0826 1540 1506	\$ B \$ S B \$ S B	0 0 0 0 0 0	-	-	30.0 30.0 29.9 29.8 29.5 29.9 28.3	36.76 37.72 36.76 36.85 36.42	3.7' N		81° (07.5' W		
7/26 8/23 9/21 10/5 10/27 1956 2/28	1737 0826 1540 1506 0820	\$ B \$ S B \$ S S B \$ S	0 0 0 0 0 0 0	-	-	30.0 30.0 29.9 29.8 29.5 29.9 28.3 25.2	36.76 37.72 36.76 36.85 36.42 35.82 35.81 37.14	3.7' N		81° (07.5' W		
7/26 8/23 9/21 10/5 10/27 1956 2/28 3/22	1737 0826 1540 1506 0820 1300 1105	\$ B \$ S B \$ S S S \$ S	0 0 0 0 0 0	-	-	30.0 30.0 29.9 29.8 29.5 29.9 28.3 25.2 25.6 24.2 20.2	36.76 37.72 36.76 36.85 36.42 35.82 35.81	3.7' N		81° ()7.5' W		
7/26 8/23 9/21 10/5 10/27 1956 2/28 3/22 4/17	1737 0826 1540 1506 0820 1300 1105 1237	S B S B S S S S	0 0 0 0 0 0 0 0	-	-	30.0 30.0 29.9 29.8 29.5 29.9 28.3 25.2 25.6 24.2 20.2 24.4	36.76 37.72 36.76 36.85 36.42 35.82 35.81 37.14 38.87 38.45	3.7' N		81° 0)7.5' W		
7/26 8/23 9/21 10/5 10/27 1956 2/28 3/22 4/17 4/24	1737 0826 1540 1506 0820 1300 1105 1237 1144	S B S B S S S S S S	0 0 0 0 0 0 0 0	-	-	30.0 30.0 29.9 29.8 29.5 29.9 28.3 25.2 25.6 24.2 20.2 24.4 25.0	36.76 37.72 36.76 36.85 36.42 35.82 35.81 37.14 38.87 38.45 36.76	3.7' N		81° (07.5' W		
7/26 8/23 9/21 10/5 10/27 1956 2/28 3/22 4/17	1737 0826 1540 1506 0820 1300 1105 1237	S B S B S S S S S S S S	0 0 0 0 0 0 0 0 0	-	-	30.0 30.0 29.9 29.8 29.5 29.9 28.3 25.2 25.6 24.2 20.2 24.4 25.0 27.2	36.76 37.72 36.76 36.85 36.42 35.82 35.81 37.14 38.87 38.45 36.76 37.11	3.7' N		81° (07.5' W		
7/26 8/23 9/21 10/5 10/27 1956 2/28 3/22 4/17 4/24 5/2	1737 0826 1540 1506 0820 1300 1105 1237 1144 0743	\$ B \$ S B \$ S \$ S \$ S B B		-	-	30.0 30.0 29.9 29.8 29.5 29.9 28.3 25.2 25.6 24.2 20.2 24.4 25.0 27.2 26.7	36.76 37.72 36.76 36.85 36.42 35.82 35.81 37.14 38.87 38.45 36.76 37.11 37.11	3.7' N		81° ()7.5' W		
7/26 8/23 9/21 10/5 10/27 1956 2/28 3/22 4/17 4/24	1737 0826 1540 1506 0820 1300 1105 1237 1144	S B S B S S S S S B S		-	-	30.0 30.0 29.9 29.8 29.5 29.9 28.3 25.2 25.6 24.2 20.2 24.4 25.0 27.2 26.7 28.5	36.76 37.72 36.76 36.85 36.42 35.82 35.81 37.14 38.87 38.45 36.76 37.11 37.11 36.89	3.7' N		81° ()7.5' W		
7/26 8/23 9/21 10/5 10/27 1956 2/28 3/22 4/17 4/24 5/2 6/5	1737 0826 1540 1506 0820 1300 1105 1237 1144 0743	S B S B S S S S B S B S B S B S B S B S		-	-	30.0 30.0 29.9 29.8 29.5 29.9 28.3 25.2 25.6 24.2 20.2 24.4 25.0 27.2 26.7 28.5 28.5	36.76 37.72 36.76 36.85 36.42 35.82 35.81 37.14 38.87 38.45 36.76 37.11 37.11 36.89 36.63	3.7' N		81° 0)7.5' W		
7/26 8/23 9/21 10/5 10/27 1956 2/28 3/22 4/17 4/24 5/2 6/5 6/19	1737 0826 1540 1506 0820 1300 1105 1237 1144 0743 0753	S B S B S S S S S B S B S B S		-	-	30.0 30.0 29.9 29.8 29.5 29.9 28.3 25.2 25.6 24.2 20.2 24.4 25.0 27.2 26.7 28.5 28.5 27.4	36.76 37.72 36.76 36.85 36.42 35.82 35.81 37.14 38.87 38.45 36.76 37.11 37.11 36.89 36.63 36.55	3.7' N		81° (07.5' W		
7/26 8/23 9/21 10/5 10/27 1956 2/28 3/22 4/17 4/24 5/2 6/5 6/19 7/2	1737 0826 1540 1506 0820 1300 1105 1237 1144 0743 0753	S B S B S S S S S B S B S S S S S B S		-	-	30.0 30.0 29.9 29.8 29.5 29.9 28.3 25.2 25.6 24.2 20.2 24.4 25.0 27.2 26.7 28.5 28.5 27.4 29.5	36.76 37.72 36.76 36.85 36.42 35.82 35.81 37.14 38.87 38.45 36.76 37.11 37.11 36.89 36.63 36.55 39.86	3.7' N		81° (07.5' W		
7/26 8/23 9/21 10/5 10/27 1956 2/28 3/22 4/17 4/24 5/2 6/5 6/19	1737 0826 1540 1506 0820 1300 1105 1237 1144 0743 0753	S B S B S S S S S B S B S B S		-	-	30.0 30.0 29.9 29.8 29.5 29.9 28.3 25.2 25.6 24.2 20.2 24.4 25.0 27.2 26.7 28.5 28.5 27.4	36.76 37.72 36.76 36.85 36.42 35.82 35.81 37.14 38.87 38.45 36.76 37.11 37.11 36.89 36.63 36.55	3.7' N		81° 0	07.5' W		

	DIATIC)1(1)	15 (JOIL	- J								
		S							P	04	NO-		
Date	Time	or	G. b	reve	рН	°C	Sal.	Cu.		4	NO_{3}^{3}	Car.	Pro
		В	C.	M.	_			Ī	n.	Tot.	2		
7/25	0945	S	0	-	-	29.3	37.77						
7/31	0935	S	0	•	_	29.5	37.73						
8/6	0918	S	0	844	_	30.6	37.59						
	0958	S	0		-	30.5	38.74						
8/16			0	_	_	30.6	39.18						
8/29	0736	S		_	~								
- 1-		В	0		-	30.6	38.52						
9/5	0843	S	0		-	29.1	36.54						
10/1	0838	S	0	one	_	28.1	37.38						
10/9	0945	S	0	•	•••	29.0	41.59						
10/18	1000	S	0	•	-	25.5	37.63						
10/24	1055	S	0	-	-	27.0	36.13						
10/29	1047	S	0		***	25.2	39.81						
11/6	0944	S	0	_	-	23.6	37.76						
11/28	1005	S	0	-	•	19.7	37.94						
12/5	1640	S	0	-	•	21.2							
1957			_										
1/16	0829	S	0	_	_	22.1	38.20						
		В	0	•	•••	22.0	38.20						
2/19	1232	S	0	-		23.6	36.92						
3/11	0950	S	0	_	***	19.2	37.97						
3/21	0737	S	0	•••	-	25.0	37.83						
		В	0	•	••	25.0	37.93						
	STATIO	יו זער	14	Den	th of	10 feet	24° 4	2.9' N		81°	05.61	N	
1955	SIAIR		17	БСР	tii Oi					-		<u> </u>	
8/23	0730	S	0	_	-	30.0	37.95						
9/21	1755	S	0	-	-	29.9	36.76						
		В	0	_	-	29.9	36.82						
10/6	0730	S	0	_	_	28.0	36.74						
		В	0	-	**	28.3	36.92						
10/26	1810	S	0	-	•••	26.7	35.88						
		В	0	-	**	26.7	35.81						
1956 1/31	1230	S	0			22.5	37.04						
2/7		S	0	-	_	24.5	35.78						
	1225			***	***		36.77						
2/16	1150	S	0	••	646	24.0							
2/28	1308	S	0	-	010	25.0	36.84						
3/22	1110	S	0		-	18.2	37.47						
4/17	1313	S	0	-	_	25.5	37.44						
4/24	1149	S	0	_	•	27.0	32.08						
5/2	0656	S	0	***		26.8	38.13						
		В	0	-	***	26.5	38.25						
6/10	1020	S	0	***	00	28.0	37.16						
7/2	1015	S	0	-	-	29.9	38.08						
7/11	0640	S	0	•	-	30.0	37.54						
		В	0	-		30.0	37.35						
7/25	0950	S	0	_	•	28.6	37.94						
. , 23	,,,,												

STATION D 14 (Cont'd)

Date	Time	S	G. 1	oreve	рН	°C	Sal.	Cu.	F	PO ₄	NO - 3 NO	Car.	Pro.
		В	C.	M.					In.	Tot.	2		
7/31	0940	S	0	_	-	29.5	36.77						
8/7	0924	S	0	-	-	30.7	37.37						
8/16	0951	S	0	-	~	30.2	38.28						
8/29	0710	S	0	-	-	30.8	36.94						
		В	0	-	-	30.5	37.51						
9/5	1014	S	0	-	-	28.7	36.46						
10/1	0854	S	0	-	_	28.4	37.19						
10/9	0950	S	0	-	-	29.0	38.31						
10/18	1032	S	0	-	-	25.5	36.74						
10/24	1100	S	0	-	-	27.0	36.15						
10/29	1025	S	0	-	-	25.5	36.26						
11/6	0950	S	0	_	_	23.6	37.79						
11/20	1014	S	0	-	-	17.5	37.80						
12/5	1635	S	0	-	-	21.3	37.97						
1957	0745	C	0			22.5	20 /0						
1/16	0745	S	0	_	-	22.5	38.60						
2/10	1202	В	0	-	_	22.4	38.60						
2/19	1302	S	0	_	-	24.3	36.73						
3/11	0956	S	0	60	-	18.8	36.96						
3/21	0640	S	0	-	_	25.5	37.17						
		В	0		0-0	25.5	37.39						

	STATIO	ON E	1	Dept	h of	8 feet	27° 0	8.5' N		80°	50. I' W		
		S							P	0,	NO		
Date	Time	or		reve	рН	°C	Sal.	Cu.	T		NO	Car.	Pro.
1957		B_	C.	M					In.	Tot.			
5/16	1320	S	0	-	-	29.0	0.30		-	~	0.8		
5/22	1215	S	0	***	•	31.0	0.20	-	**	5. I			
5/28	1300	S	0	-	-	31.0	0.10	-	-	-	-	-	8. 1
6/20	1230	S	0	-	_	30.1	0.10	-	-	***	2.9		
1957	STATIO	ON E	2	Dept	h of	8 feet	26° 5	8.9' N	-	80°	37.6' W		
5/16	1341	S	0	-	••	28.5	0.40	0.10	1.0	3.8	0.6	0.6	5. I
5/22	1230	S	0	-		31.2	0.20	0.53	-	1.6			
5/28	1341	S	0	•	-	31.5	0.20	0.05	1.0	3.4	1.0	3.6	4.2
6/6	1500	S	0	-	**	29.2	0.40	0.32	••	10.8			/ 0
6/20	1247	S	0	**	••	-	0.10	0.16	0.8	2.0	0.9	~	6.2
1057	STATIO	ON E	3	Dep	th of	2 feet	26° 5	4.9' N		81°	04.31 W		
1957 5/16	1145	S	0	••	_	28.5	0.20	0.10	0.4	2.7	0.0	~	0.5
5/22	1107	S	0	_	•	30.0	0.40	0.02	_	0.5			
5/28	1127	S	0	**	-	31.2	0.20	0.04	-	2.0	0.2	2.7	
6/20	1120	S	0	-	-	30.6	0.20	0.04	0.8	1.4	0.0	3.6	5.1
	STATI	ON E	<u> </u>	Dep	th of	8 feet	26° 5	3.5' N		81°	04.5' W	_	
1955 3/25	1146	S	0	_	8.0	24.4	0.00	0.20					
8/2	1338	S	0	_	-	30.0	0.05	0.45					
9/15	1225	S	0	•	7.8	32.2	0.10	0.02		0.7			
9/30	1216	S	0	•	7.6	30.8	0.10	0.53	_	••	-	6.9	11.6
11/4	1350	S	0	940	8.2	24.5	0.15	0.27	-	-	-	4.6	16.3
12/12	1320	S	0	-	-	20.2	0.00	0.22	-	-	-	2.8	
1956 1/12	1615	S	0	-	7.7	14.0	0.20	0.04					
3/7	1156	S	0	**	7.8	23.5	0.15	0.06	_	_	-	2.4	
4/11	1155	S	0	-	7.8	22.0	0.13	0.02	0.5	1.1	-	3.5	0.0
5/9	1205	S	0	**	7.8	26.4	0.40	0.09	0.0	0.8		••	5.4
6/6	1415	S	0	••	8.0	31.5	0.30	0.02	-	2.7		3.8	
7/12	1216	S	0	-	8.2			0.09					4 /
8/30	1159	S	0	-	7.4	20.2	0.10	0.01	1.4	1.9		-	4.6
10/29	1230	S	0	-	8.5	28.2	0.20	0.03	-	2.4		3.5	4.3
11/16	0900 1315	S S	0	-	-	23.2	0.30	0.02		1.0	0.2	-	4.5
1957	1515	3	O	_	-								
1/8	1231	S	0	-	8.3	19.5	0.40	0.00	0.5	1.6	4.0	4.3	6.7
1/31	0905	S	0	••	8.2	24.0	0.10	0.23	3 2	3.9	0.4	7.6	6.4
2/7	1030 1145	S S	0	-	8.3 7.9	24.1 24.0	0.30	0.15	3. 3 3. 4	11.9		6.3	13.4
3/28 4/11	1200	S	0	**	8.1	26.8	0.40	0.02		2.6		4.6	5.4
5/16	1540	S	0	_	-	28.3	0.20	_	1. 1	3.9		5.6	0.7
5/22	1220	S	0		_	31.0	0.20	0.10		2.0		2.8	4.0

	5111110		- (0	-/									
		S							P		NO-		
Date	Time	or	G. l	oreve	рΗ	°C	Sal.	Cu.		4	NO_{2}^{3}	Car.	Pro.
		В	C.	M.					In.	Tot.	2		
5/28	1240	S	0		_	31.0	0.30	0.09	0.8	2.4	0.0	4.9	4.8
6/6	1215	S	0	_	_	30.2	0.20	0.00		1.8	1.0	4.5	7.8
6/12	1200	S	0		_	29.7	0.20	0.02	0.6	1.7	100	-	7.0
6/20	1130	S	0	_	_	30.8	0.30	0.00		1.7	1.8	5.0	10.6
0,20													
1955	STATIC	DN E	5	Dept	th of	3 feet	26 5	0.5' N		81,	05' W		
3/25	1110	S	0	-	7.8	25.7	0.00	0.21					
9/15	1135	S	0	-	7.3	30.0	0.10	0.01	•	1.0			
9/30	1255	S	0	-	7.4	29.8	0.10	0.32	-	-	-	10.4	23.8
11/4	1318	S	0	-	7.8	23.0	0.00	0.27	0.2	0.4	2.0		
12/12	1305	S	0	→	-	20.2	0.00	0.10		_	-	-	0.0
1956	- /	_											
1/12	1600	S	0	-	7.7	15.0	0.20	0.04					
2/3	1140	S	0	-	_	21.8	0.20	-	0.3	0.7	-	4.7	
3/7	1211	S	0	•••	7.9	24.6	0.15	0.05		1.4	-	2.5	, ,
4/11	1100	S	0	-	8.5	22.0	0.20	0.06		1.0	-	4.2	6.6
5/9	1145	S	0		7.6	26.0	0.40	0.11	-	1.3			
6/6	1400	S	0	-	8.0	31.1	-	0.04		1.6	-	5.9	1.8
7/12	1250	S	0	-	8.2	32.9	0.10	0.13		1.9	0.4	••	4.2
8/30	1235	S	0	-	7.4	-	0.10	0.02		2.6	-	4.0	6.0
10/29	1300	S	0	-	8.5	27.5	0.10		1.3	3.2	-	5.0	7.3
11/16	0855	S	0	-	8.3	21.2	0.20	0.08	2.6	2.8	14.5	3.0	4.4
12/10	1259	S	0	-	-	2.6	0.30	0.00	0.6	-	10.4	3.9	5.5
1957	,,,,,	~	0		0 0	20.0	0.70	0 07	0 0		2 0	5 2	/ -
1/8	1222	S	0	~	8.2	20.0	0.70	0.07	0.9	1.8	3.9	5.2	6.5
1/31	0855	S	0	-	8.2	24.0	0.10	0.35				2 1	7 0
2/7	1015	S	0	•••	7.7	22.7	0.30	0.00		1.2	-	3.1	7.0
3/28	1130	S	0	-	7.7	23.9	0.10	0.00		3.7	- /	4.9	8.9
4/11	1145	S	0	-	8.0	26.0	0.30	0.08	0.2	2.4	5.6	2.7	7.1
5/16	1530	S	0		-	26.7	0.10	0.05	-	1.4			
5/22	1230	S	0	-	-	30.5	0.20	0.00	_	2.0			
5/28	1300	S	0	-	•	31.0	0.20	0.11	***	1.4			
6/6	1315	S	0	_	_	29.5	0.40	0.08	-	7.6			
	1215		0	-	-		0.10			0.8			
6/20	1200	S	0	-	-	30.8	0.20	0.02	-	0.6			
	STATIO	ON E	6	Dep	th of	3 feet	26° 4	7.4' N		81°	07.71 V	V	
1957													
5/16		S	0	-	-	28.5				3.8	2.8	3.3	4.4
5/22	1050	S	0	-	-	30.2	0.20	0.20		0.9			
5/28	1107	S	0	-	-	30.0	0.40	0.12		3.8	1.0		
6/20	1100	S	0	~	-	30.8	0.20	0.12	0.6	1.6			

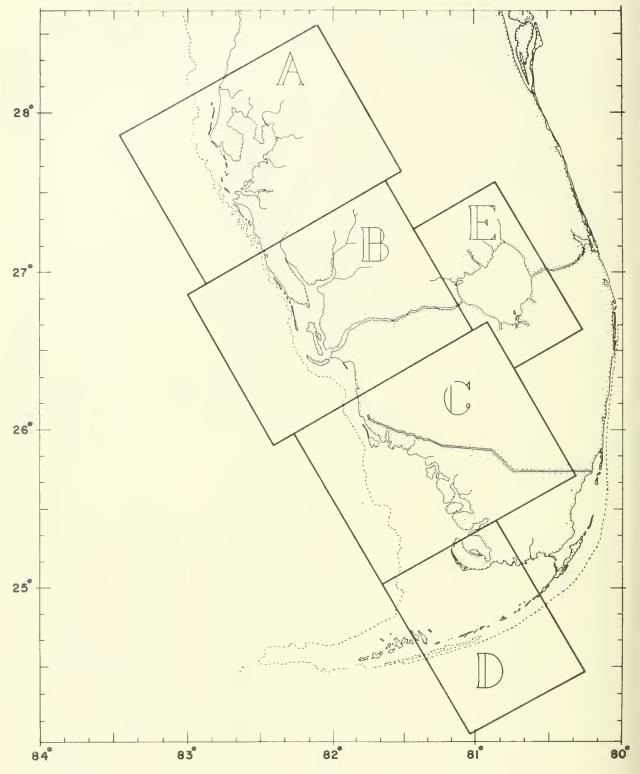


Figure 1.--Index map of southern Florida showing the five areas covered by the detailed maps which give actual stations.

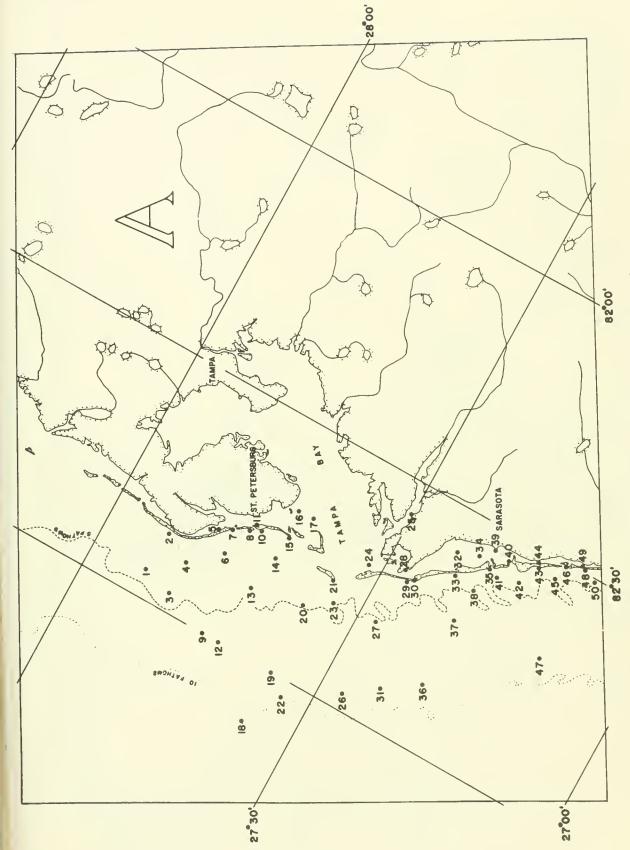


Figure 2. -- Tampa Bay area showing station locations.

Figure 3. -- Charlotte Harbor area showing station locations.

218

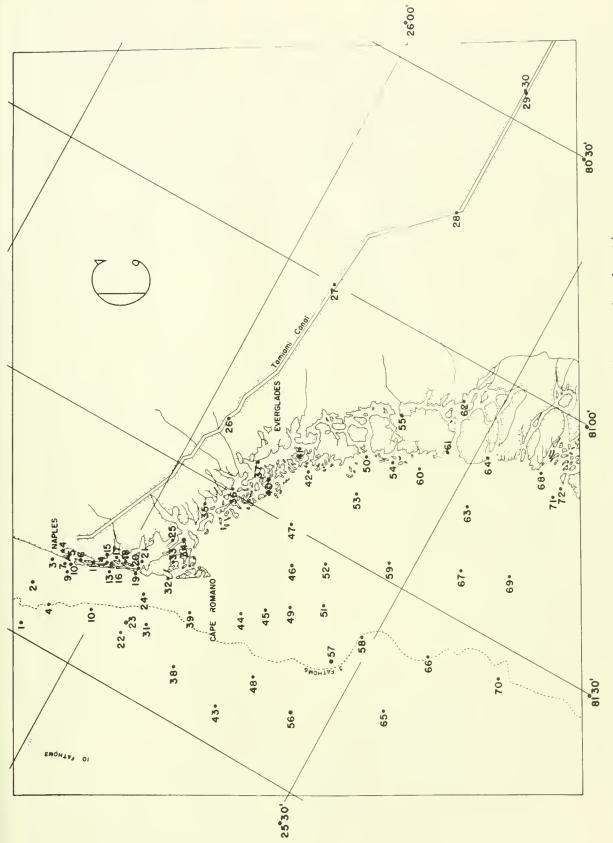


Figure 4. -- Thousand Islands area showing station locations.

Figure 5. -- Florida Bay and Lake Okeechobee areas showing station locations.



